

# Ball Rail Systems

R310EN 2202 (2009.06)

The Drive & Control Company



# Contents

<b>General Product Description</b>	<b>4</b>	<b>High-Speed Ball Runner Blocks made of steel</b>	<b>84</b>
New Features at a Glance	4	Product Description	84
Product Description	6	FNS	86
Product Overview, Ball Runner Blocks with Load Capacities and Moments	8	SNS	87
Product Overview, Ball Guide Rails with Rail Lengths	10	<b>Super Ball Runner Blocks made of steel</b>	<b>88</b>
General Technical Data and Calculations	12	Product Description	88
<b>Selection Criteria</b>	<b>20</b>	FKS	90
Design Styles and Versions	20	SKS	92
System Preload	24	<b>Ball Runner Blocks made of aluminum</b>	<b>94</b>
Accuracy Classes	26	Product Description	94
Ball Chain	28	FNS	96
Seals	29	SNS	98
Materials	30	<b>Corrosion-Resistant Ball Runner Blocks</b>	<b>100</b>
<b>Standard Ball Runner Blocks made of steel</b>	<b>32</b>	Product Description, Resist NR	100
Product Description	32	Standard Ball Runner Blocks, Resist NR	101
Ordering Example	35	FNS, FLS	101
FNS – Flanged, normal, standard height	36	FKS, SNS	102
FLS – Flanged, long, standard height	38	SLS, SKS	103
FKS – Flanged, short, standard height	40	Product Description, Resist NR II	104
SNS – Slimline, normal, standard height	42	Standard Ball Runner Blocks, Resist NR II	106
SLS – Slimline, long, standard height	44	FNS	106
SKS – Slimline, short, standard height	46	SNS	107
SNH – Slimline, normal, high	48	Product Description, Resist CR	108
SLH – Slimline, long, high	50	Standard Ball Runner Blocks, Resist CR	110
FNN – Flanged, normal, low profile	52	FNS, FLS	110
FKN – Flanged, short, low profile	54	SNS, SLS	111
SNN – Slimline, normal, low profile	56	SNH, SLH	112
SKN – Slimline, short, low profile	58	FNN, FKN	113
<b>Heavy Duty Ball Runner Blocks made of steel</b>	<b>60</b>	SNN, SKN	114
FNS	60	Heavy Duty Ball Runner Blocks, Resist CR	115
FLS	62	FNS, FLS	115
SNS	64	SNS, SLS	116
SLS	66	SNH, SLH	117
SNH	68	Super Ball Runner Blocks, Resist CR	118
SLH	70	FKS, SKS	118
<b>High Precision Ball Runner Blocks made of steel</b>	<b>72</b>	<b>Standard Ball Guide Rails made of steel</b>	<b>120</b>
Product Description	72	Product Description, Ball Guide Rails SNS	120
Comparison	74	Ordering Examples	121
Conventional Ball Runner Blocks	74	SNS with Cover Strip and Strip Clamps	122
High Precision Ball Runner Blocks	75	SNS with Cover Strip and Protective End Caps	124
Frictional Drag Variations	76	SNS with Plastic Mounting Hole Plugs	126
Travel accuracy	77	SNS with Steel Mounting Hole Plugs	128
FNS, FLS	80	SNS for mounting from below	130
SNS, SLS	81	<b>Corrosion-Resistant Ball Guide Rails</b>	<b>132</b>
SNH, SLH	82	Product Description, Resist NR II	132
Application Examples	83	Ball Guide Rails, Resist NR II	132
		Product Description, Resist CR	134
		Ball Guide Rails, Resist CR	134
		<b>V-Guide Rails</b>	<b>136</b>
		Product Description, V-Guide Rail SNS	136
		SNS without Mounting Holes	137
		Mounting and Installation Tolerances	138


<b>Wide Ball Rail Systems made of steel and Resist CR</b>	<b>140</b>	<b>Mounting Instructions, Ball Runner Blocks and Ball Guide Rails</b>	<b>232</b>
Product Description, Ball Runner Blocks BNS, CNS	140	General Notes	232
BNS – Wide, normal, standard height	142	Mounting	233
CNS – Compact, normal, standard height	146	Installation Tolerances	240
Product Description, Ball Guide Rails BNS	148	Composite Ball Guide Rails	243
Ordering Examples	149	<b>Lubrication and Maintenance</b>	<b>244</b>
BNS with Plastic Mounting Hole Plugs	150	Notes on Lubrication	244
BNS with Steel Mounting Hole Plugs	152	Lubrication	245
BNS for mounting from below	153	Grease lubrication	245
<b>Accessories for Ball Runner Blocks and Ball Guide Rails</b>	<b>154</b>	Liquid grease lubrication	248
Product Description, Accessories for Ball Runner Blocks	154	Oil lubrication	252
Accessories for Ball Runner Blocks	155	Design example	256
Product Description, Accessories for Ball Guide Rails	174	Lubrication from above	258
Accessories for Ball Guide Rails	175	Maintenance	260
<b>Accessories, Clamping and Braking Units</b>	<b>182</b>		
Product Description, Accessories, Hydraulic Clamping and Braking Units	182		
KBH	184		
KBHS	186		
Notes on Clamping and Braking Units	187		
Product Description, Accessories, Hydraulic Clamping Units	188		
Technical Data and Calculations	190		
KWH	191		
Product Description, Accessories, Pneumatic Clamping and Braking units	194		
MBPS	196		
TKPS	198		
UBPS	202		
Product Description, Accessories, Pneumatic Clamping Units	204		
MK	206		
MKS	208		
LCP	210		
LCPS	212		
Product Description, Accessories, Manual Clamping Units, Spacer Plate	214		
HK	215		
Spacer Plate	217		
<b>Accessories, Rack and Pinion Drive</b>	<b>218</b>		
Product Description, Accessories, Rack and Pinion Drive	218		
Combination Options	220		
Gear Rack with Helical Teeth	222		
High-Performance Servo Gear Units with Adjustable Backlash	224		
AC Servo Motors MSK	227		
Technical Data and Calculations	228		
Lubrication and Mounting	231		

## General Product Description

## New Features at a Glance

### Double-Lipped Seal (DS) for Ball Runner Blocks

For applications where the Ball Rail Systems are exposed to high levels of contamination such as metal chips, wood dust, metalworking fluids, etc.

For details,  29




### High precision ball runner blocks, steel version

Ball runner blocks now with even better travel accuracy.

Frictional drag variation and frictional drag levels have been reduced still further.


For details,  72

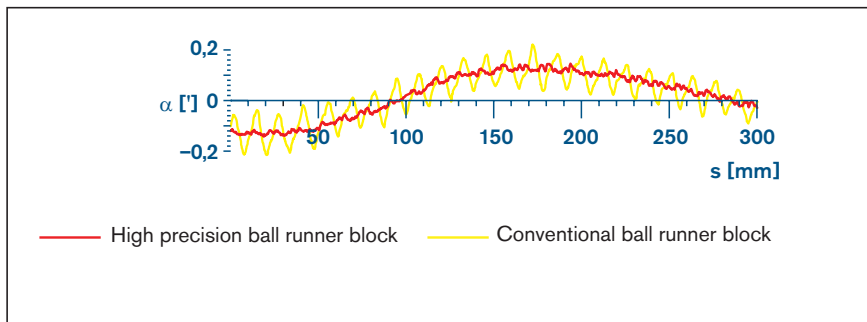

### Super Ball Runner Blocks, steel version, with new recirculation geometry

Available in design styles:

- FKS – Flanged, short, standard height
- SKS – Slimline, short, standard height

For details,  88



### Ball Guide Rails for use on cast mineral parts

Ball guide rails with flat bases make it easier to position the ball guide rail on mounting bases made of cast and ground mineral materials with cast-in metallic threaded anchors.

A 50 percent larger contact area results in a lower surface pressure between the ball guide rail and the shaped contact surface of the cast mineral part.

These rails can also be used in standard applications.

Sizes 25 – 45 available on request.

For details,  122 – 127






**V-Guide Rails for simplified mounting**

The V-guide rail has no mounting holes. It is installed by press-fitting it into mounting base.

The mating cavity for the rail can be produced using a standard contour milling machine. It is not necessary to drill any holes.

For details, [☞ 136](#)

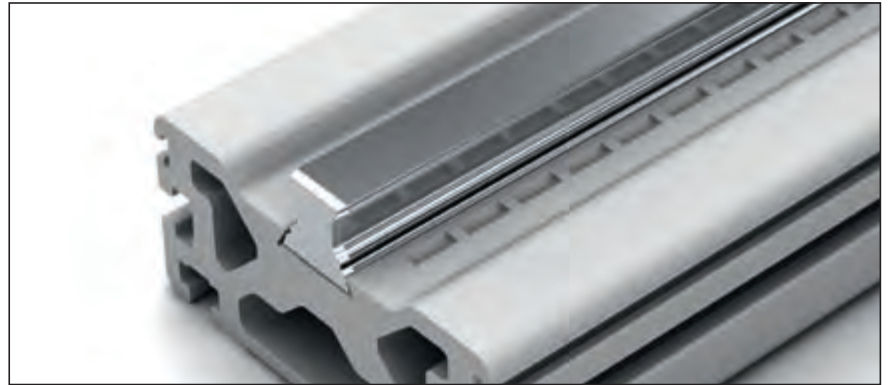**Wide Runner Blocks BNS and CNS with new recirculation geometry and with optional ball chain**


Available in sizes:

- 20/40
- 25/70

For details, [☞ 140](#)

**Clamping and Braking Units**

For details, [☞ 182](#)

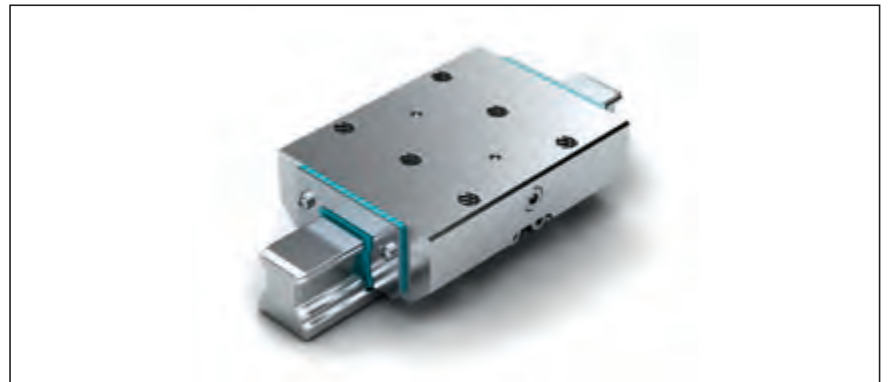**Rack and pinion drives for Ball Runner Blocks**

For details, [☞ 218](#)



General Product Description

# Product Description

## Characteristic features

### Make up your own compact linear motion guideways from interchangeable standard stock elements...

Rexroth manufactures its ball guide rails and ball runner blocks with such high precision, especially in the running track zone, that each individual component element can be replaced by another at any time.

This makes infinite combinations possible within each accuracy class.

And it enables a high standard of logistics that are unique worldwide.

Each element can be individually ordered and separately stocked. Both sides of the guide rail can be used as reference edges.

## Highlights

- Same load capability in all four main load directions
- Very low noise level and best travel performance
- Excellent dynamic characteristics:  
Travel speed:  $v_{max}$  up to 10 m/s  
Acceleration:  $a_{max} = 500 \text{ m/s}^2$
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- Lube ports with metal threads on all sides<sup>1)</sup>
- Limitless interchangeability; all guide rail versions can be combined with all runner block versions
- Optimum system rigidity through preloaded O-arrangement
- Optimum installation error compensation with Super runner block
- 60% weight saving with aluminum runner block (compared to the steel version)

## Further highlights

- Interchangeability with Rexroth's Roller Rail Systems and eLINE Ball Rail Systems
- Integrated, inductive and wear-free measuring system as an option
- Extensive range of accessories
- Attachments can be bolted to ball runner blocks from above or below<sup>1)</sup>
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block<sup>1)</sup>
- Mounting threads provided on end faces for fixing of all add-on elements
- High rigidity in all load directions – permits applications with just one runner block per rail
- Integrated all-round sealing
- High torque load capacity
- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Smooth, light running thanks to optimized ball recirculation and ball or ball chain guidance
- Various preload classes

### Corrosion protection (optional)<sup>1)</sup>

- Resist NR: Ball runner block body made of corrosion-resistant steel per EN 10088
- Resist NR II: Ball runner block body, ball guide rail and all steel parts made from corrosion-resistant steel per EN 10088
- Resist CR: Ball runner block body and ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating

1) depends on type

## Codes for design styles of all the available ball runner blocks and ball guide rails

FNS = Flanged, normal, standard height  
 FLS = Flanged, long, standard height  
 FKS = Flanged, short, standard height  
 FNN = Flanged, normal, low profile  
 FKN = Flanged, short, low profile

SNS = Slimline, normal, standard height  
 SLS = Slimline, long, standard height  
 SKS = Slimline, short, standard height  
 SNH = Slimline, normal, high  
 SLH = Slimline, long, high  
 SNN = Slimline, normal, low profile  
 SKN = Slimline, short, low profile

BNS = Wide, normal, standard height  
 CNS = Compact, normal, standard height

Definition Ball Runner Block design style <sup>2)</sup>		Code (example)		
		F	N	S
Width	Flanged	F		
	Slimline			
	Wide			
	Compact			
Length	Normal		N	
	Long			
	Short			
Height	Standard height			S
	High			
	Low			


2) For each ball runner block and ball guide rail type, any design styles that are not available will be indicated in gray lettering.

Definition Ball Guide Rail design style <sup>2)</sup>		Code (example)		
		S	N	S
Width	Slimline	S		
	Wide			
Length	Normal		N	
Height	Standard height			S

## Design style examples

### Standard Ball Rail System

FNS – Flanged, normal, standard height

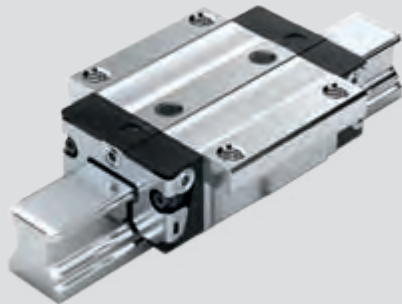

SNS – Slimline, normal, standard height




### Wide Ball Rail System

BNS – Wide, normal, standard height



CNS – Compact, normal, standard height

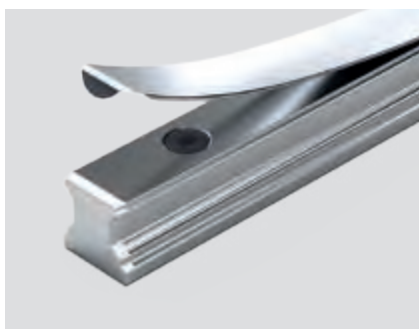

#### Proven cover strip for ball guide rail mounting holes

- A single cover for all holes – saves time and money
- Made of corrosion-resistant spring steel per EN 10088
- Easy to fit – simply clip on and secure


















#### Ball chain (optional)

- Optimizes noise levels

## General Product Description

## Product Overview, Ball Runner Blocks with Load Capacities and Moments

Ball runner blocks		Page	Size	15	20	25	30	35	45	55	65		
				Load capacities (N) and load moments (Nm)									
Standard, Heavy Duty, High Precision Ball Runner Blocks made of steel <sup>3)</sup> Resist NR <sup>4)</sup> Resist CR <sup>6)</sup>		FNS R1651 <sup>3)6)</sup> R2001 <sup>4)</sup>	36	C 1)	7 800	18 800	22 800	31 700	41 900	68 100	98 200	123 000	
			101	C 2)	7 280	17 400	21 300	29 300	41 900	63 300	–	–	
		SNS R1622 <sup>3)6)</sup> R2011 <sup>4)</sup>	42	C <sub>0</sub> 1)	13 500	24 400	30 400	41 300	54 000	85 700	121 400	192 700	
			102	C <sub>0</sub> 2)	12 100	21 700	27 300	37 200	54 000	77 100	–	–	
		SNH R1621 <sup>3)6)</sup>	48	M <sub>t</sub> 1)	M <sub>t</sub> 2)	74	240	320	540	890	1 830	3 100	4 850
					M <sub>t0</sub> 1)	130	310	430	720	1 160	2 310	3 860	7 610
	M <sub>L</sub> 1)		M <sub>L</sub> 2)	40	130	180	290	440	890	1 540	2 430		
			M <sub>Lo</sub> 1)	71	165	240	380	565	1 130	1 905	3 815		
	Standard Ball Runner Blocks made of steel <sup>3)</sup> Resist NR <sup>4)</sup> Resist CR <sup>6)</sup>		FLS R1653 <sup>3)6)</sup> R2002 <sup>4)</sup>	38	C 1)	10 000	24 400	30 400	40 000	55 600	90 400	124 200	163 000
				101	C 2)	9 000	23 100	27 500	38 000	53 000	81 900	–	–
			SLS R1623 <sup>3)6)</sup> R2012 <sup>4)</sup>	44	C <sub>0</sub> 1)	20 200	35 200	45 500	57 800	81 000	128 500	170 000	289 000
				103	C <sub>0</sub> 2)	17 500	32 500	39 500	53 700	75 600	111 400	–	–
SLH R1624 <sup>3)6)</sup>			50	M <sub>t</sub> 1)	M <sub>t</sub> 2)	96	310	430	690	1 200	2 440	3 950	6 440
					M <sub>t0</sub> 1)	190	450	650	1 000	1 740	3 470	5 400	11 420
		M <sub>L</sub> 1)	M <sub>L</sub> 2)	75	225	345	495	830	1 700	2 630	4 620		
			M <sub>Lo</sub> 1)	150	330	510	715	1 215	2 425	3 600	8 190		
Standard Ball Runner Blocks made of steel <sup>3)</sup> Resist NR <sup>4)</sup> Resist CR <sup>6)</sup>			FKS R1665 <sup>3)6)</sup> R2000 <sup>4)</sup>	40	C 1)	5 400	12 400	15 900	22 100	29 300	–	–	–
				102	C 2)	4 600	12 400	14 000	22 100	29 300	–	–	–
			SKS R1666 <sup>3)6)</sup> R2010 <sup>4)</sup>	46	C <sub>0</sub> 1)	8 100	13 600	18 200	24 800	32 400	–	–	–
				103	C <sub>0</sub> 2)	6 700	13 600	15 200	24 800	32 400	–	–	–
	FNN R1693 <sup>3)6)</sup> SNN R1694 <sup>3)6)</sup>		52	M <sub>t</sub> 1)	M <sub>t</sub> 2)	52	150	230	380	640	–	–	–
					M <sub>t0</sub> 1)	80	170	260	430	700	–	–	–
		M <sub>L</sub> 1)	M <sub>L</sub> 2)	44	150	205	380	640	–	–	–		
			M <sub>Lo</sub> 1)	28	58	94	150	220	–	–	–		
	FKN R1663 <sup>3)6)</sup> SKN R1664 <sup>3)6)</sup>	54	M <sub>Lo</sub> 2)	M <sub>Lo</sub> 1)	19	52	82	133	200	–	–	–	
				M <sub>Lo</sub> 2)	24	58	83	150	220	–	–	–	
		56	C 1)	C 2)	–	14 500	22 800	–	–	–	–	–	
				C <sub>0</sub> 1)	–	24 400	30 400	–	–	–	–	–	
M <sub>t</sub> 1)				–	190	320	–	–	–	–	–		
M <sub>t0</sub> 1)				–	310	430	–	–	–	–	–		
58	M <sub>L</sub> 1)	M <sub>L</sub> 1)	–	100	180	–	–	–	–	–			
		M <sub>Lo</sub> 1)	–	165	240	–	–	–	–	–			
		C 1)	–	9 600	15 900	–	–	–	–	–			
		C <sub>0</sub> 1)	–	13 600	18 200	–	–	–	–	–			
Super Ball Runner Blocks made of steel <sup>3)</sup> Resist CR <sup>6)</sup>		FKS 1661 <sup>3)6)</sup>	90	C 1)	3 900	10 100	11 400	15 800	21 100	–	–	–	
			F <sub>max</sub> 1)	1 500	3 900	4 400	6 100	8 100	–	–	–		
		SKS 1662 <sup>3)6)</sup>	92	M <sub>t</sub> 1)	39	130	170	270	450	–	–	–	
M <sub>tmax</sub> 1)			15	50	65	105	175	–	–	–			

Ball runner blocks		Page	Size	15	20	25	30	35	45	55	65	
					20/40	25/70		35/90				
				Load capacities (N) and load moments (Nm)								
High-Speed Ball Runner Blocks made of steel		FNS R2001 ... 9.	86	C <sup>1)</sup>	5 300	12 700	15 500	21 500	28 500	-	-	-
				C <sub>0</sub> <sup>1)</sup>	9 100	16 500	20 600	28 000	36 700	-	-	-
		SNS R2011 ... 9.	87	M <sub>t</sub> <sup>1)</sup>	50	160	210	360	600	-	-	-
				M <sub>t0</sub> <sup>1)</sup>	88	210	290	490	780	-	-	-
				M <sub>L</sub> <sup>1)</sup>	27	88	120	190	300	-	-	-
				M <sub>Lo</sub> <sup>1)</sup>	48	110	160	250	380	-	-	-
Ball Runner Blocks made of aluminum		FNS R1631	96	C <sup>1)</sup>	7 800	18 800	22 800	31 700	41 900	-	-	-
				C <sup>2)</sup>	7 280	17 400	21 300	29 300	41 900	-	-	-
		SNS R1632	98	F <sub>max</sub> <sup>1) 2)</sup>	3 000	7 200	8 800	12 200	16 200	-	-	-
				M <sub>t</sub> <sup>1)</sup>	74	240	320	540	890	-	-	-
				M <sub>t</sub> <sup>2)</sup>	69	220	300	500	890	-	-	-
				M <sub>tmax</sub> <sup>1) 2)</sup>	29	92	125	210	345	-	-	-
				M <sub>L</sub> <sup>1)</sup>	40	130	180	290	440	-	-	-
				M <sub>L</sub> <sup>2)</sup>	37	120	170	270	440	-	-	-
Ball Runner Block Resist NR II <sup>5)</sup>		FNS R2001 ... 0.	106	C <sup>1)</sup>	5 100	12 300	15 000	20 800	27 600	-	-	-
				C <sup>2)</sup>	4 700	11 400	14 000	19 300	27 600	-	-	-
		SNS R2011 ... 0.	107	C <sub>0</sub> <sup>1)</sup>	9 300	16 900	21 000	28 700	37 500	-	-	-
				C <sub>0</sub> <sup>2)</sup>	8 400	15 000	18 900	25 800	37 500	-	-	-
				M <sub>t</sub> <sup>1)</sup>	63	205	270	460	760	-	-	-
				M <sub>t</sub> <sup>2)</sup>	58	190	250	425	760	-	-	-
				M <sub>t0</sub> <sup>1)</sup>	90	215	295	500	805	-	-	-
				M <sub>t0</sub> <sup>2)</sup>	81	190	265	450	805	-	-	-
				M <sub>L</sub> <sup>1)</sup>	34	110	150	245	375	-	-	-
				M <sub>L</sub> <sup>2)</sup>	31	100	140	225	375	-	-	-
Wide Ball Runner Blocks made of steel <sup>3)</sup> Resist CR <sup>6)</sup>		BNS R1671 <sup>3)6)</sup>	142	C <sup>1)</sup>	-	13 650	29 000	-	58 200	-	-	-
				C <sup>2)</sup>	-	12 850	27 550	-	-	-	-	-
		CNS R1672 <sup>3)6)</sup>	146	C <sub>0</sub> <sup>1)</sup>	-	19 675	42 500	-	86 300	-	-	-
				C <sub>0</sub> <sup>2)</sup>	-	18 050	39 450	-	-	-	-	-
M <sub>t</sub> <sup>1)</sup>				-	310	1 080	-	2 880	-	-	-	
M <sub>t</sub> <sup>2)</sup>				-	290	1 025	-	-	-	-	-	
M <sub>t0</sub> <sup>1)</sup>				-	450	1 580	-	4 270	-	-	-	
M <sub>t0</sub> <sup>2)</sup>				-	415	1 465	-	-	-	-	-	
M <sub>L</sub> <sup>1)</sup>	-	95	305	-	920	-	-	-				
M <sub>L</sub> <sup>2)</sup>	-	90	290	-	-	-	-	-				
M <sub>Lo</sub> <sup>1)</sup>	-	135	450	-	1 370	-	-	-				
M <sub>Lo</sub> <sup>2)</sup>	-	125	420	-	-	-	-	-				

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1.

Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

1) Load capacities for Ball Runner Block **without** ball chain.

2) Load capacities for Ball Runner Block **with** ball chain.

3) Steel: All steel parts made of carbon steel.

4) Resist NR size 15 – 35: Ball runner block body made of corrosion-resistant steel per EN 10088.

5) Resist NR II: All steel parts made of corrosion-resistant steel per EN 10088.













6) Resist CR: Ball runner block body made of steel with matte-silver hard-chrome plated corrosion-resistant coating.





For design style codes,  6




## General Product Description

## Product Overview, Ball Guide Rails with Rail Lengths

Ball guide rails			Page	Size							
				15	20	25	30	35	45	55	65
			Rail length (mm)								
Standard Ball Guide Rails made of steel <sup>3)</sup>		SNS R1605 .3. .. / R1605 .B. .. For mounting from above, with cover strip and strip clamps	122	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1605 .6. .. / R1605 .D. .. For mounting from above, with cover strip and screw-down protective caps	124	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1605 .0. .. / R1605 .C. .. For mounting from above, with plastic mounting hole plugs	126	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1606 .5. .. For mounting from above, for steel mounting hole plugs	128	–	–	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1607 .0. .. For mounting from below	130	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
Standard Ball Guide Rails Resist NR II <sup>1)</sup>		SNS R2045 .3. .. For mounting from above, with cover strip and strip clamps	132	1 856	3 836	3 836	3 836	3 836	–	–	–
		SNS R2045 .0. .. For mounting from above, with plastic mounting hole plugs	133	1 856	3 836	3 836	3 836	3 836	–	–	–
		SNS R2047 .0. .. For mounting from below	133	1 856	3 836	3 836	3 836	3 836	–	–	–
Standard Ball Guide Rails Resist CR <sup>2)</sup>		SNS R1645 .3. .. For mounting from above, with cover strip and strip clamps	134	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1645 .0. .. For mounting from above, with plastic mounting hole plugs	135	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1647 .0. .. For mounting from below	135	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
V-Guide Rails		SNS R1608 .1. .. Without mounting holes, for press-fitting	137	3 836	3 836	3 836	–	–	–	–	–

Ball guide rails			Page	Size		
				20/40	25/70	35/90
			Rail length (mm)			
Wide Ball Guide Rails made of steel		<b>BNS</b> <b>R1675 .0. .</b> For mounting from above, with plastic mounting hole plugs	150	3 836	3 836	3 836
		<b>BNS</b> <b>R1676 .5. .</b> For mounting from above, for steel mounting hole plugs	152	–	3 836	3 836
		<b>BNS</b> <b>R1677 .0. .</b> For mounting from below	153	3 836	3 836	3 836
Wide Ball Guide Rails Resist CR <sup>2)</sup>		<b>BNS</b> <b>R1673 .0. .</b> For mounting from above, with plastic mounting hole plugs	150	3 836	3 836	3 836

- 1) Resist NR II: Guide rail made of corrosion-resistant steel per EN 10088
- 2) Resist CR: Ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating
- 3) Sizes 20 and 25: Length up to 5816 mm (one-piece) available upon request  
 Sizes 30 and 35: Length up to 5836 mm (one-piece) available upon request  
 Size 45: Length up to 5771 mm (one-piece) available upon request

For design style codes,  6

## General Product Description

# General Technical Data and Calculations

## General notes

The general technical data and calculations apply to all Ball Rail Systems, i.e., to all ball runner blocks and ball guide rails.

Specific technical data relating to the individual ball runner blocks and ball guide rails is given separately.


## Preload classes

To cover the widest possible range of applications, Rexroth ball runner blocks are available in different preload classes.

In general, the rigidity of the ball runner block rises with increasing preload. If vibrations are expected, an appropriately high preload ( $\geq 8\%$  C) should be selected.

So as not to reduce the service life, the preload should not exceed 1/3 of the load on bearing F.

## Guide systems with parallel rails

For the selected preload class, also comply with the permissible parallelism offset of the rails ("Selection Criteria, Accuracy Classes"  26).

When specifying ball rail systems of accuracy class N, we recommend preload class C0 or C1 to avoid distortive stresses due to the tolerances.

The following preload classes are available:

- Ball runner block without preload (preload class C0)
- Ball runner block with 2% C preload (preload class C1)
- Ball runner block with 8% C preload (preload class C2)
- Ball runner block with 13% C preload (preload class C3)

## Travel speed

$$v_{\max} : 3 - 10 \text{ m/s}$$

For exact values, refer to the individual ball runner blocks.

## Acceleration

$$a_{\max} : 250 - 500 \text{ m/s}^2$$

For exact values, refer to the individual ball runner blocks.  
(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}} : a_{\max} = 50 \text{ m/s}^2$ )


## Operating temperature range

$$t : 0 - 80 \text{ }^{\circ}\text{C}$$


Brief peaks up to 100 °C are permitted. For sub-zero temperatures, please consult us.  
For ball runner blocks without ball chain: lower limit = -10 °C.

## Friction

The friction coefficient  $\mu$  of Rexroth Ball Rail Systems is approx. 0.002 to 0.003 (without friction of the seals).

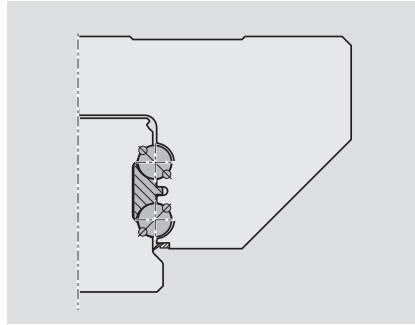

Rexroth's special design with 4 ball circuits ensures that the balls make **contact at two points** regardless of the direction of loading. This reduces the friction to a minimum.

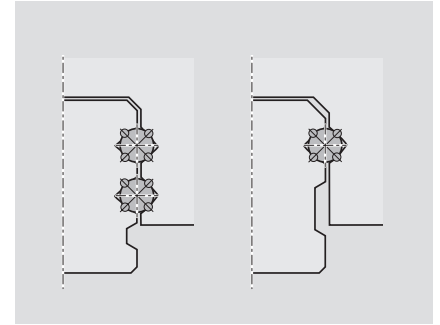

Other ball rail systems with 2 or 4 ball circuits with **4-point contact** have multiple friction: in the Gothic-arch raceway profile, the differential slip at side loading, as well as with comparable preload without load, causes higher friction (depending on the conformity and load, this may be up to approx. 5 times the frictional value). This high friction leads to correspondingly greater heat.

## Seals

The purpose of seals is to prevent dirt, chips, metalworking fluids, etc. from entering the ball runner block and thus shortening its service life.

### Standard seals (SS)

Universal seals are incorporated as standard in Rexroth ball runner blocks. They provide equal sealing performance on ball guide rails with and without cover strip. Low friction combined with a good sealing effect was an important factor during design.

Suitable for applications requiring good sealing.

For details, [☞ 29](#)

### Low-friction (LS) and double-lipped (DS) seals

LS: For applications requiring especially smooth running.  
DS: For frequent exposure to fluids.

Available as alternatives.

For details, [☞ 29](#)

### End seals

For use in environments with fine dirt or metal particles and cooling or cutting fluids. Replaceable.

End seals can be ordered separately as accessories for mounting by the customer.

### FKM seals

For extreme use in environments with coarse dirt or metal particles or where cooling or cutting fluids are used intensively. Replaceable.

FKM end seals can be ordered separately as accessories for mounting by the customer.

## Scraper plates

For use in environments subject to coarse dirt or chips.

Scraper plates can be ordered separately as accessories for mounting by the customer.

General Product Description

# General Technical Data and Calculations

## Definitions of forces and load moments


In Rexroth Ball Rail Systems the raceways are arranged at a contact angle of 45°. This results in the same load capacity of the entire system in all four major planes of load application. The ball runner blocks may be subjected to both forces and load moments.

### Forces in the four major planes of load application

- Pull  $F_z$  (positive z-direction)
- Push  $-F_z$  (negative z-direction)
- Side load  $F_y$  (positive y-direction)
- Side load  $-F_y$  (negative y-direction)

### Moments

- Torsional moment  $M_x$  (about the x-axis)
- Longitudinal moment  $M_y$  (about the y-axis)
- Longitudinal moment  $M_z$  (about the z-axis)

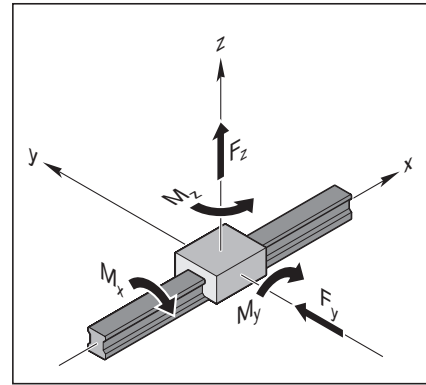

## Definition of load capacities

### Dynamic load capacity C


The radial loading of constant magnitude and direction which a linear rolling bearing can theoretically endure for a nominal life of  $10^5$  meters distance traveled (as per ISO 14728 Part 1).

Note:  
The dynamic load capacities given in the tables are 20% above the ISO values. These values have been confirmed in tests.

### Basic static load capacity $C_0$

Static load in the load direction that corresponds to a calculated load in the center of the contact point with the greatest load between the rolling element (ball) and track zone (guide rail) of 4200 MPa.

Note:  
With this load on the contact point, a permanent overall deformation of the rolling element and track zone occurs, corresponding to around 0.0001 times the ball diameter (as per ISO 14 728-1).

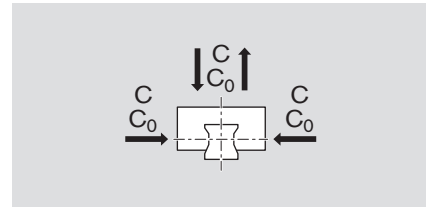


## Definition of moment load capacities

### Dynamic torsional moment load capacity $M_t$

Comparative dynamic moment about the X-axis which causes a load equivalent to the dynamic load capacity C.

### Static torsional moment load capacity $M_{t0}$

Comparative static moment about the X-axis which causes a load equivalent to the static load capacity  $C_0$ .

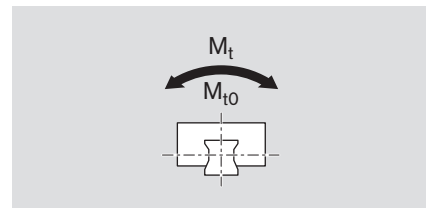


### Dynamic longitudinal moment load capacity $M_L$

Comparative dynamic moment about the Y-axis or the Z-axis which causes a load equivalent to the dynamic load capacity C.

### Static longitudinal moment load capacity $M_{L0}$

Comparative static moment about the Y-axis or the Z-axis which causes a load equivalent to the static load capacity  $C_0$ .

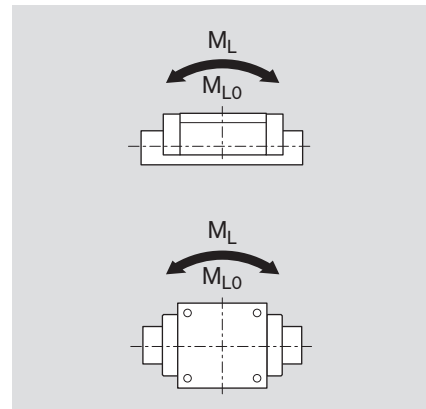



## Definition and calculation of the nominal life

The calculated service life which an individual linear rolling bearing, or a group of apparently identical rolling element bearings operating under the same conditions, can attain with a 90% probability, with contemporary, commonly used materials and manufacturing quality under conventional operating conditions (as per ISO 14728-1).

### Nominal life at constant speed

If the speed is constant, calculate the nominal life  $L_{10}$  in meters or  $L_{h\ 10}$  in hours according to formula (1) or (2):

$$(1) \quad L_{10} = \left( \frac{C}{F_m} \right)^3 \cdot 10^5 \text{ m}$$

$$(2) \quad L_{h\ 10} = \frac{L_{10}}{2 \cdot s \cdot n \cdot 60}$$

$L_{10}$  = nominal life (m)  
 $L_{h\ 10}$  = nominal life (h)  
 $C$  = dynamic load capacity (N)  
 $F_m$  = equivalent dynamic load on bearing of ball runner block (N)  
 $s$  = stroke length<sup>1)</sup> (m)  
 $n$  = stroke repetition rate (full cycles) ( $\text{min}^{-1}$ )

1) At a stroke length  $< 2 \cdot$  ball runner block length  $B_1$  (see dimension drawings) the load capacities will be reduced. Please consult us.

### Nominal life at variable speed

If the speed varies, calculate the nominal life  $L_{h\ 10}$  in hours according to formula (3) and, if necessary, formula (4):

$$(3) \quad L_{h\ 10} = \frac{L_{10}}{60 \cdot v_m}$$

$$(4) \quad v_m = \frac{|v_1| \cdot q_{t1} + |v_2| \cdot q_{t2} + \dots + |v_n| \cdot q_{tn}}{100 \%}$$

$L_{10}$  = nominal life (m)  
 $L_{h\ 10}$  = nominal life (h)  
 $v_m$  = average travel speed (m/min)  
 $v_1, \dots, v_n$  = travel speed in phases 1 ... n (m/min)  
 $q_{t1}, \dots, q_{tn}$  = discrete time steps for  $v_1, \dots, v_n$  in phases 1 ... n (%)

### Modified life expectancy calculation

If 90% probability is not sufficient, the nominal life values must be reduced by the factor  $a_1$  as given in the table.

$$L_{na} = a_1 \cdot \left( \frac{C}{F} \right)^3 \cdot 10^5 \text{ m}$$

$$L_{ha} = \frac{L_{na}}{2 \cdot s \cdot n \cdot 60}$$

Probability of survival (%)	$L_{na}$	$a_1$
90	$L_{10a}$	1
95	$L_{5a}$	0.62
96	$L_{4a}$	0.53
97	$L_{3a}$	0.44
98	$L_{2a}$	0.33
99	$L_{1a}$	0.21

$L_{na}$  = modified life expectancy (m)  
 $L_{ha}$  = modified life expectancy (h)  
 $C$  = dynamic load rating (N)  
 $F$  = load on bearing for ball runner block (N)  
 $a_1$  = life expectancy factor (-)

# General Technical Data and Calculations

## Equivalent dynamic load on bearing for calculation of service life

$$(5) F_m = \sqrt[3]{(F_{eff1})^3 \cdot \frac{q_{s1}}{100\%} + (F_{eff2})^3 \cdot \frac{q_{s2}}{100\%} + \dots + (F_{effn})^3 \cdot \frac{q_{sn}}{100\%}}$$

## Equivalent dynamic load with variable load on bearing


If the bearing is subject to variable loads, the equivalent dynamic load  $F_m$  must be calculated according to formula (5).

- $F_m$  = equivalent dynamic load on bearing for ball runner block (N)
- $F_{eff1} \dots F_{effn}$  = effective equivalent load on bearing for runner block in phases 1 ... n (N)
- $q_{s1} \dots q_{sn}$  = discrete travel steps for  $F_{eff1} \dots F_{effn}$  (%)

## Equivalent dynamic load with combined load on bearing

The dynamic equivalent load on bearing  $F_{comb}$  resulting from combined vertical and horizontal external loads is calculated according to formula (6).

$$(6) F_{comb} = |F_y| + |F_z|$$

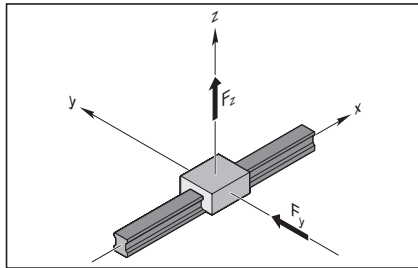

- $F_{comb}$  = combined equivalent dynamic load on bearing (N)
- $F_y$  = external load due to a resulting force in the y-direction (N)
- $F_z$  = external load due to a resulting force in the z-direction (N)

**Note**

If  $F_y$  and  $F_z$  involve different load levels,  $F_y$  and  $F_z$  must be calculated separately using formula (5). An external load acting at an angle on the ball runner block is to be broken down into its positive and negative  $F_y$  and  $F_z$  components, and these values are then to be used in formula (6).


**Note**  
The structure of the Ball Rail System permits this simplified calculation.

## Equivalent dynamic load with combined load on bearing in conjunction with a torsional and/or longitudinal moment

The combined equivalent load on bearing  $F_{comb}$  resulting from combined vertical and horizontal external loads in conjunction with a torsional and/or longitudinal moment is calculated according to formula (7).

$$(7) F_{comb} = |F_y| + |F_z| + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

- $F_{comb}$  = combined equivalent dynamic load on bearing (N)
- $F_y$  = external load due to a resulting force in the y-direction (N)
- $F_z$  = external load due to a resulting force in the z-direction (N)
- $C$  = dynamic load capacity<sup>1)</sup> (N)
- $M_t$  = dyn. torsional moment load<sup>1)</sup> (Nm)
- $M_L$  = dyn. longitudinal moment load<sup>1)</sup> (Nm)
- $M_x$  = load due to a resulting dynamic torsional moment about the X-axis (Nm)
- $M_y$  = load due to a resulting dynamic longitudinal moment about the Y-axis (Nm)
- $M_z$  = load due to a resulting dynamic longitudinal moment about the Z-axis (Nm)

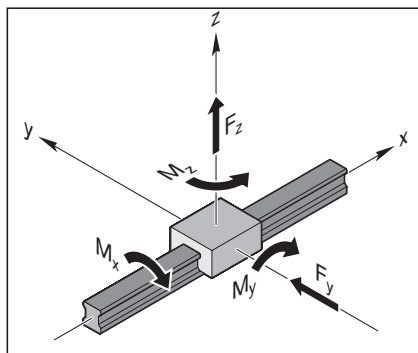

**Note**  
Formula (7) applies only when using a single guide rail with a single ball runner block. The formula is simpler for other combinations.


**Note**

If  $F_y$  and  $F_z$  involve different load levels,  $F_y$  and  $F_z$  must be calculated separately using formula (5). An external load acting at an angle on the ball runner block is to be broken down into its positive and negative  $F_y$  and  $F_z$  components, and these values are then to be used in formula (7).

**Equivalent dynamic load on bearing taking account of internal preload force  $F_{pr}$**

To increase the rigidity and accuracy of the guide system preloaded runner blocks should be used (see also "Selection Criteria, System Preload" 24).

For preload classes C2 and C3, the internal preload force must be taken into account since the two rows of balls a and b are designed to be oversized and are therefore preloaded against each other with an internal preload force  $F_{pr}$  which causes them to deform by the amount  $\delta_{pr}$  (see chart).

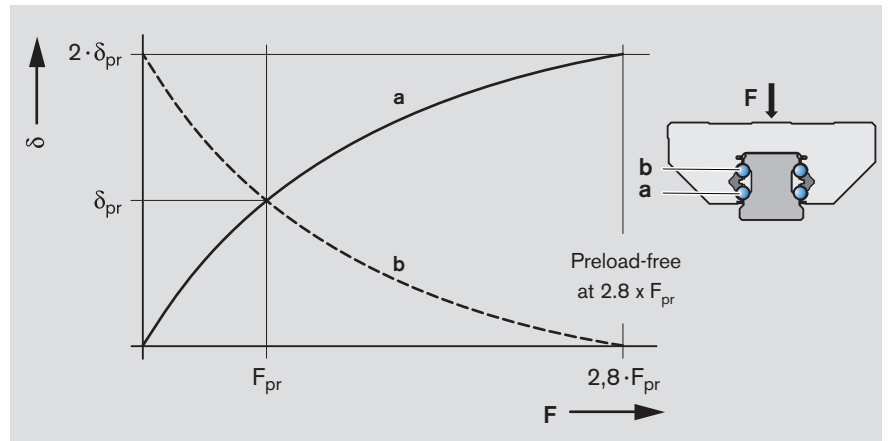

- a = loaded (lower) row of balls
- b = non-loaded (upper) row of balls
- $\delta$  = deformation at rolling contact point at F
- $\delta_{pr}$  = deformation at rolling contact point at  $F_{pr}$
- F = load on the runner block
- $F_{pr}$  = internal preload force

**Effective equivalent load on bearing**

When an external load reaches 2.8 times the internal preload force  $F_{pr}$ , one row of balls becomes preload-free.

**Note**

For highly dynamic load cases, the combined equivalent load on the bearings should be  $F_{comb} < 2.8 \cdot F_{pr}$  in order to avoid damage to the rolling bearings due to slip.

In this case, the effective equivalent load on bearing  $F_{eff}$  is not calculated according to formula (6) or (7), but according to formula (9).

Two different cases should be considered:

**Case 1:  $F_{comb} > 2.8 \cdot F_{pr}$**

In case 1, the internal preload force  $F_{pr}$  has no effect on the service life:

$$(8) F_{eff} = F_{comb}$$

- $F_{comb}$  = combined equivalent dynamic load on bearing (N)
- $F_{eff}$  = effective equivalent load on bearing (N)

**Case 2:  $F_{comb} \leq 2.8 \cdot F_{pr}$**

In case 2 the preload force  $F_{pr}$  is factored into the calculation of the effective equivalent load on bearing:

$$(9) F_{eff} = \left( \frac{F_{comb}}{2.8 \cdot F_{pr}} + 1 \right)^{\frac{3}{2}} \cdot F_{pr}$$

- $F_{pr}$  = internal preload force (N)
- $F_{pr}$  = 8% C (0.08 C) (at preload class C2)
- $F_{pr}$  = 13% C (0.13 C) (at preload class C3)

**Equivalent static load on bearing**

**Combined external static load resulting from vertical and horizontal external loads in conjunction with a static torsional and/or longitudinal moment**

Calculate the equivalent static load  $F_{0\ comb}$  according to formula (10).

**Note**

The equivalent static load  $F_{0\ comb}$  must not exceed the static load capacity  $C_0$ .

Formula (10) applies only when using a single guide rail with a single ball runner block. The formula is simpler for other combinations.

$$(10) F_{0\ comb} = |F_{0y}| + |F_{0z}| + C_0 \cdot \frac{|M_{0x}|}{M_{t0}} + C_0 \cdot \frac{|M_{0y}|}{M_{L0}} + C_0 \cdot \frac{|M_{0z}|}{M_{L0}}$$

- $F_{0\ comb}$  = static combined equivalent load on bearing (N)
- $F_{0y}$  = external static load due to a resulting force in the y-direction (N)
- $F_{0z}$  = external static load due to a resulting force in the z-direction (N)
- $C_0$  = static load capacity<sup>1)</sup> (N)
- $M_{t0}$  = static torsional moment load capacity<sup>1)</sup> (Nm)
- $M_{L0}$  = static longitudinal moment load capacity<sup>1)</sup> (Nm)
- $M_{0x}$  = load due to a static resulting torsional moment load about the X-axis (Nm)
- $M_{0y}$  = load due to a static resulting longitudinal moment load about the Y-axis (Nm)
- $M_{0z}$  = load due to a static resulting longitudinal moment load about the Z-axis (Nm)

**Note**

An external load acting at an angle on the ball runner block is to be broken down into its positive and negative  $F_{0y}$  and  $F_{0z}$  components, and these values are then to be used in formula (10).

1) Refer to the load capacities and moments for the individual ball runner blocks

General Product Description

# General Technical Data and Calculations

## Definitions and calculation for dynamic and static load ratios

The ratio between the load capacity of the ball runner block and the load applied to it can be used to pre-select the type of linear guide. The dynamic load ratio  $C/F_{max}$  and the static load ratio  $C_0/F_{0max}$  should be chosen as appropriate for the application.

This permits calculation of the required load capacity and selection of the rail guide size and runner block design style using the load capacity tables.

$$\text{Dynamic ratio} = \frac{C}{F_{max}}$$

$C$  = dynamic load rating (N)  
 $F_{max}$  = maximum dynamic load on bearing of the most highly loaded ball runner block (N)

**Case 1:** Static load  $F_{0max} > F_{max}$ :

$$\text{Static ratio} = \frac{C_0}{F_{0max}}$$

$C_0$  = static load capacity (N)  
 $F_{0max}$  = maximum static load on bearing of the most highly loaded ball runner block (N)  
 $F_{max}$  = maximum dynamic load on bearing of the most highly loaded ball runner block (N)

**Case 2:** Static load  $F_{0max} < F_{max}$ :

$$\text{Static ratio} = \frac{C_0}{F_{max}}$$

## Recommended values for load ratios

The table below contains recommendations for load ratios. The values are offered merely as a rough guide reflecting typical customer require-

ments (e.g. service life, accuracy, rigidity) by sector and application.

Machine type/sector		$C/F_{max}$	$C_0/F_{0max}$
Machine tools	Application example		
	General	6 ... 9	> 4
	Turning	6 ... 7	> 4
	Milling	6 ... 7	> 4
	Grinding	9 ... 10	> 4
	Engraving	5	> 3
Rubber and plastics processing machinery	Injection molding	8	> 2
Woodworking and wood processing machines	Sawing, milling	5	> 3
Assembly/handling technology and industrial robots	Handling	5	> 3
Oil hydraulics and pneumatics	Raising/lowering	6	> 4

## Definitions and calculation of the static load safety factor $S_0$

The static load safety factor  $S_0$  is required in order to avoid any inadmissible permanent deformations of the raceways and balls. It is the ratio of the static load

capacity  $C_0$  to the maximum load occurring,  $F_{0 \max}$  and is always determined using the highest amplitude, even if this is only very short-lived.

$$(11) \quad S_0 = \frac{C_0}{F_{0 \max}}$$

$S_0$	= static load safety factor	(-)
$C_0$	= static load capacity	(N)
$F_{0 \max}$	= maximum static load on bearing of the most highly loaded ball runner block	(N)

Recommendations for the static load safety factor under different conditions of use

Conditions of use	$S_0$
Normal conditions of use	1 ... 2
Low impact loads and vibrations	2 ... 4
Moderate impact loads and vibrations	3 ... 5
Heavy impact loads and vibrations	4 ... 6
Unknown load parameters	6 ... 15

Irrespective of the static load safety factor, it must be ensured that the maximum permissible loads, as indicated for some Ball Rail Systems, are not exceeded in service.

**⚠ The load-bearing capability of the threaded connections must also be checked. These are frequently weaker than the bearings themselves. The load-bearing capability of linear motion technology components is such that the screws used could be over-stressed.**













☞ 233

More technical data and details can be found in the "Linear Motion Technology Handbook" R310EN 2017"











## Selection Criteria

## Design Styles and Versions

Ball runner blocks		Application area	Load capacity	Special feature	
Standard Ball Runner Blocks made of steel		<b>FNS</b> R1651 <sup>1)2)5)</sup> R2001 <sup>3)4)</sup>	For high rigidity requirements	High	For mounting from above and below
		<b>FLS</b> R1653 <sup>1)2)5)</sup> R2002 <sup>3)</sup>	For very high rigidity requirements	Very high	For mounting from above and below
		<b>FKS</b> R1665 R2000 <sup>3)</sup>	For restricted space in the longitudinal direction	Medium	For mounting from above and below Supplementary to DIN 645-1
		<b>SNS</b> R1622 <sup>1)2)5)</sup> R2011 <sup>3)4)</sup>	For restricted space in the transverse direction	High	For mounting from above
		<b>SLS</b> R1623 <sup>1)2)5)</sup> R2012 <sup>3)</sup>	For restricted space in the transverse direction	Very high	For mounting from above
		<b>SKS</b> R1666 R2010 <sup>3)</sup>	For restricted space in the longitudinal and transverse direction	Medium	For mounting from above
		<b>SNH</b> R1621 <sup>1)2)5)</sup>	For restricted space in the transverse direction and high rigidity requirements	High	Higher rigidity than SNS
		<b>SLH</b> R1624 <sup>1)2)5)</sup>	For restricted space in the transverse direction and high rigidity requirements	Very high	Higher rigidity than SLS
Standard Ball Runner Blocks made of steel with Resist CR		<b>FNN</b> R1693	For restricted space in the vertical direction	High	Lower rigidity than FNS Not defined in DIN 645-1
		<b>FKN</b> R1663	For restricted space in the vertical and longitudinal direction	Medium	Lower rigidity than FKS Not defined in DIN 645-1
		<b>SNN</b> R1694	For restricted space in the vertical and transverse direction	High	Lower rigidity than SNS Not defined in DIN 645-1
		<b>SKN</b> R1664	For restricted space in the vertical, longitudinal and transverse direction	Medium	Lower rigidity than SKS Not defined in DIN 645-1

- 1) Heavy Duty Ball Runner Blocks
- 2) High Precision Ball Runner Blocks
- 3) Resist NR
- 4) Resist NR II
- 5) Resist CR

Ball runner blocks		Application area	Load capacity	Special feature
<b>Super Ball Runner</b> Blocks made of steel with Resist CR		<b>FKS R1661</b> For compensating large tolerances in the adjoining structure	Medium	At least 2 ball runner blocks per rail required
		<b>SKS R1662</b> For compensating large tolerances in the adjoining structure	Medium	At least 2 ball runner blocks per rail required
<b>Ball Runner Blocks</b> made of aluminum		<b>FNS R1631</b> For lightweight constructions For compensating slight tolerances in the adjoining structure	High	For mounting from above and below
		<b>SNS R1632</b> For lightweight constructions For compensating slight tolerances in the adjoining structure	High	For mounting from above
<b>High-Speed Ball Runner</b> Blocks made of steel		<b>FNS R2001 ... 9</b> For very high travel speeds (up to 10 m/s)	High	For mounting from above and below
		<b>SNS R2011 ... 9</b> For very high travel speeds (up to 10 m/s)	High	For mounting from above
<b>Wide Ball Runner</b> Blocks made of steel with Resist CR		<b>BNS R1671</b> For high torsional moments in one-rail applications	Very high	For mounting from above and below
		<b>CNS R1672</b> For high torsional moments in one-rail applications where space is limited at the sides	Very high	For mounting from above

**Codes for design styles of all the available runner blocks**

FNS = Flanged, normal, standard height  
 FLS = Flanged, long, standard height  
 FKS = Flanged, short, standard height  
 FNN = Flanged, normal, low profile  
 FKN = Flanged, short, low profile

SNS = Slimline, normal, standard height  
 SLS = Slimline, long, standard height  
 SKS = Slimline, short, standard height  
 SNH = Slimline, normal, high  
 SLH = Slimline, long, high  
 SNN = Slimline, normal, low profile  
 SKN = Slimline, short, low profile

BNS = Wide, normal, standard height  
 CNS = Compact, normal, standard height

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged	F		
	Slimline			
	Wide			
	Compact			
<b>Length</b>	Normal		N	
	Long			
	Short			
<b>Height</b>	Standard height			S
	High			
	Low			

Selection Criteria

# Design Styles and Versions

Ball guide rails		Application area	Mounting method	Special feature
Standard Ball Guide Rails made of steel		<b>SNS</b> Standard version Very harsh environments Robust cover strip fastening	For mounting from above	With cover strip and strip clamps. A single cover for all holes. No holes required in end face for fastening of cover strip.
		<b>SNS</b> Harsh environments Compact cover strip fastening	For mounting from above	With cover strip and protective end caps. A single cover for all holes.
		<b>SNS</b> Economical	For mounting from above	With plastic mounting hole plugs. No extra space needed at rail ends.
		<b>SNS</b> More resistant to mechanical stressing (e.g. impacts) Very harsh environments	For mounting from above	With steel mounting hole plugs. No extra space needed at rail ends.
		<b>SNS</b> Easy access to mounting base underside Best sealing action of end seals	For mounting from below	Larger screw fasteners than for mounting from above. Greater side loads permitted. No extra space needed at rail ends.
V-Guide Rails made of steel		<b>SNS</b> Reduced geometric variation in travel characteristics Single-rail applications (mounting in AL profile)	No mounting holes	Installed by press-fitting into mounting base. Economical mounting method.
Wide Ball Guide Rails made of steel		<b>BNS</b> High moment load capacity	For mounting from above	With plastic mounting hole plugs. No extra space needed at rail ends.
		<b>BNS</b> High moment load capacity More resistant to mechanical stressing (e.g. impacts) Very harsh environments	For mounting from above	With steel mounting hole plugs. No extra space needed at rail ends.
		<b>BNS</b> High moment load capacity Best sealing action of end seals	For mounting from below	Larger screw fasteners than for mounting from above. Greater side loads permitted than single-row series. No extra space needed at rail ends.

1) Resist NR II











2) Resist CR

### Codes for design styles of all the available ball guide rails

SNS = Slimline, normal, standard height

BNS = Wide, normal, standard height

Definition		Code (example)		
Ball guide rail design style		S	N	S
Width	Slimline	S	N	S
	Wide			
Length	Normal	N		
Height	Standard height	S		

Accessories Add-on elements are available as options for the ball runner blocks.	Application area
<b>Scraper Plate</b> 	The scraper plate serves to remove coarse particles or dirt that has become encrusted on the ball guide rail. When making your selection, consider whether the ball guide rail is to be used with or without a cover strip.
<b>End Seal</b> two-piece 	External end seals provide effective protection for the ball runner block, preventing dirt, small particles and liquids from working their way in. This further improves the sealing performance. The two-piece end seal can be retrofitted over the ball guide rail.
<b>FKM Seal</b> one-piece and two-piece 	Better sealing performance than the end seal, but with higher friction. For use in environments with high contamination levels, metalworking fluids or aggressive media. Resistant to chemicals and high temperatures.
<b>Seal Kit</b> 	The seal kit is recommended in cases where both a scraper plate and end seal are required.
<b>Lubrication Adapter</b> 	For oil and grease lubrication from above for SNH and SLH ball runner blocks (high versions).
<b>Lube Plate</b> 	Enables further variations for lubrication of ball runner blocks. Available in designs with metric threads or pipe threads.
<b>Front Lube Unit</b> 	For applications requiring very long relubrication intervals. Under normal loads, they allow travel distances of up to 10,000 km without relubrication. The function is only assured where there is no exposure to liquids and little contamination. The maximum operating temperature is 60 °C.
<b>Bellows</b> 	Bellows come in a variety of designs, e.g. with or without lubricating plate. The heat-resistant versions are metallized on one side, making them non-combustible, non-flammable and resistant to sparks, welding splatter or hot shavings. They can withstand temperatures of up to 200 °C for brief periods and operating temperatures of 80 °C.
<b>Clamping and Braking Units</b> 	The clamping units serve to prevent the Ball Rail System from moving when they are at rest. The braking units can be used to bring moving Ball Rail Systems to a standstill and keep them stationary during rest phases. The following versions are available: hydraulic, pneumatic and manual clamping units.
<b>Rack and pinion</b> 	Gear racks and pinions are space-saving solutions for driving linear motion guides. For transmission of high forces within a small space and with low noise generation. All attachments such as gear reducers, motors and controllers are also available.

## Selection Criteria

# System Preload

## Definition of the preload class

Preloading force relative to the dynamic load capacity  $C$  of the respective ball runner block.

### Example

- Ball Runner Block FNS R1651 314 20
- Preload class C1
- Dynamic load capacity  $C = 41,900 \text{ N}$   
( $\varnothing$  37, size 35, load capacity  $C$ )

Calculation:

$$\begin{aligned} C1 &= 2\% C \\ &= 838 \text{ N} \end{aligned}$$

This runner block is mounted with an internal preload force  $F_{pr}$  of 838 N.

## Selection of the preload class

In Ball Runner Blocks without preload (preload class C0) there is a clearance between the runner block and the guide rail of between 1 and 10  $\mu\text{m}$ .

When using two rails and more than one runner block per guide rail, this clearance is usually equalized by parallelism tolerances.

Code	Preload	Application area
<b>C0</b>	<b>Without preload</b>	For particularly smooth-running guide systems with the lowest possible friction for applications with large installation tolerances. Clearance versions are available only in accuracy classes N and H.
<b>C1</b>	<b>2% C</b>	For precise guide systems with low external loads and high demands on overall rigidity.
<b>C2</b>	<b>8% C</b>	For precise guide systems with both high external loading and high demands on overall rigidity; also recommended for single-rail systems. Above average moment loads can be absorbed without significant elastic deflection. Further improved overall rigidity with only medium moment loads.
<b>C3</b>	<b>13% C</b>	For highly rigid guide systems such as precision machine tools, etc. Above average loads and moments can be absorbed with the least possible elastic deflection. Ball runner blocks with preload C3 available only in accuracy classes UP, SP and XP; heavy duty ball runner blocks only in UP, SP and P.



### Elastic deflection dependent on the preload class and the runner block

#### Example

##### Ball Runner Block FNS

Flanged, normal, standard height

Size 35:

- a) Ball Runner Block R1651 31. 20 with preload C1 (2% C)
- b) Ball Runner Block R1651 32. 20 with preload C2 (8% C)
- c) Ball Runner Block R1651 33. 20 with preload C3 (13% C)

#### Example

##### Ball Runner Block FLS

Flanged, long, standard height

Size 35:

- a) Ball Runner Block R1653 31. 20 with preload C1 (2% C)
- b) Ball Runner Block R1653 32. 20 with preload C2 (8% C)
- c) Ball Runner Block R1653 33. 20 with preload C3 (13% C)

#### Example

##### Ball Runner Block SNS

Slimline, normal, standard height

Size 35:

- a) Ball Runner Block R1622 31. 20 with preload C1 (2% C)
- b) Ball Runner Block R1622 32. 20 with preload C2 (8% C)
- c) Ball Runner Block R1622 33. 20 with preload C3 (13% C)

#### Example

##### Ball Runner Block SLS





Slimline, long, standard height

Size 35:

- a) Ball Runner Block R1623 31. 20 with preload C1 (2% C)
- b) Ball Runner Block R1623 32. 20 with preload C2 (8% C)
- c) Ball Runner Block R1623 33. 20 with preload C3 (13% C)

#### Key to illustration

$\delta_{el.}$  = elastic deflection ( $\mu\text{m}$ )  
 $F$  = load (N)

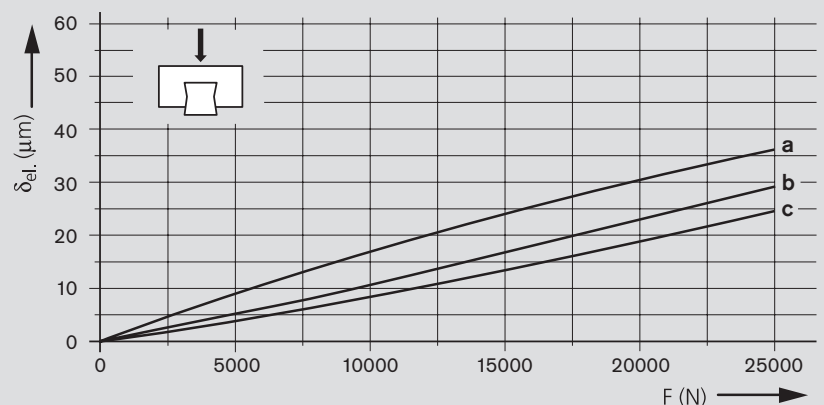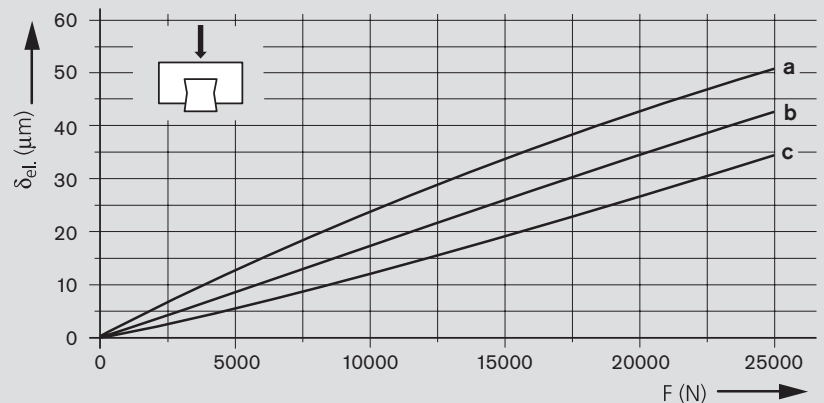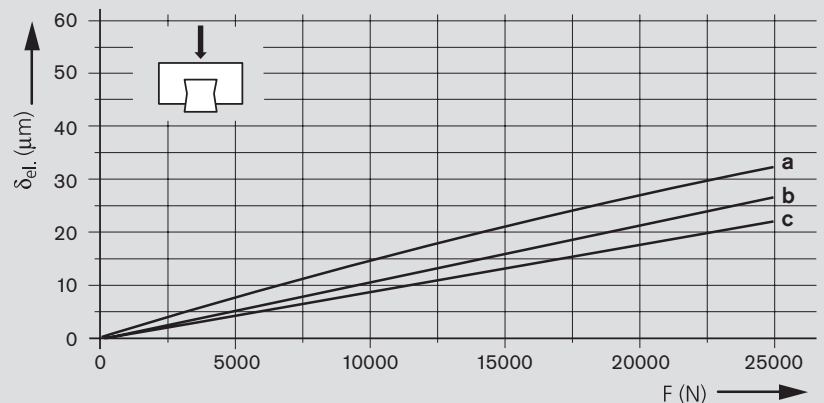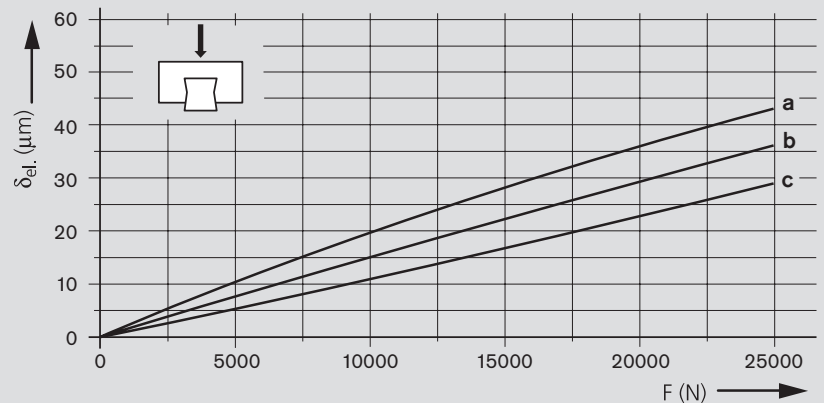


Selection Criteria

# Accuracy Classes

## Accuracy classes and their tolerances

In Ball Rail Systems, the runner blocks are available in six accuracy classes and the guide rails in five accuracy classes.

For details of the available runner blocks and guide rails, see the "Part numbers" tables.

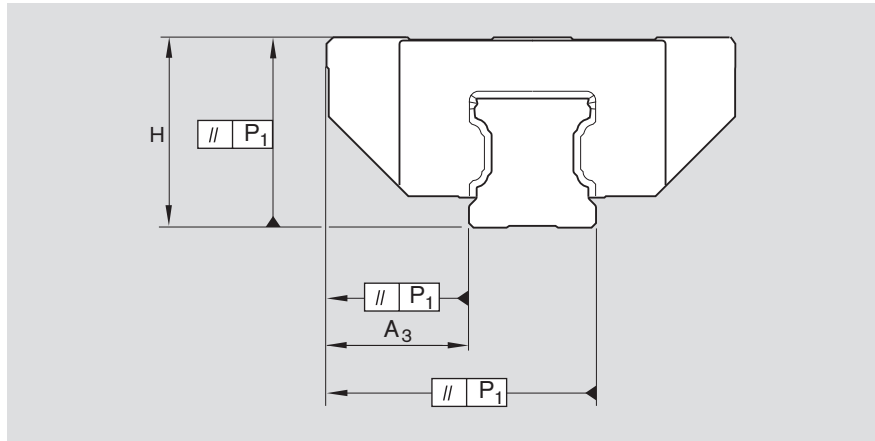

### Built-in interchangeability through precision machining

Rexroth manufactures its ball guide rails and ball runner blocks with such high precision, especially in the ball track zone, that each individual component element can be replaced by another at any time.

For example, a runner block can be used without problems on various guide rails of the same size.

Similarly, different ball runner blocks can also be used on one and the same ball guide rail.

	H	A <sub>3</sub>	ΔH, ΔA <sub>3</sub>
<b>Measured at middle of runner block</b>			
	For any ball runner block/rail combination at any position on rail		For different ball runner blocks at same position on rail

### Ball Rail System made of steel, aluminum, Resist NR and Resist NR II

Accuracy classes	Dimensional tolerances (μm)		Max. difference in dimensions H and A <sub>3</sub> on the same rail (μm)
	H	A <sub>3</sub>	
N	±100	±40	30
H	±40	±20	15
P	±20	±10	7
XP <sup>1)</sup>	±11	±8	7
SP	±10	±7	5
UP	±5	±5	3

1) Ball runner block in accuracy class XP, ball guide rail with accuracy class SP

### Ball Rail System, Resist CR, matte-silver hard chrome plated

Accuracy classes	Dimensional tolerances (μm)				Max. difference in dimensions H and A <sub>3</sub> on the same rail (μm)	
	Runner block/ Guide rail	H Guide rail	Runner block/ Guide rail	A <sub>3</sub> Guide rail	Runner block/ Guide rail	Guide rail
H	+47 -38	+44 -39	±23	+19 -24	18	15


### Key to illustration

- H = height tolerance (μm)
- A<sub>3</sub> = lateral tolerance (μm)
- P<sub>1</sub> = parallelism offset (μm)
- L = rail length (mm)

## Parallelism offset $P_1$ of the ball rail system in service

### Values measured at middle of runner block for ball rail systems without surface coating

For hard chrome plated ball guide rails Resist CR, the values may increase by up to 2  $\mu\text{m}$ .

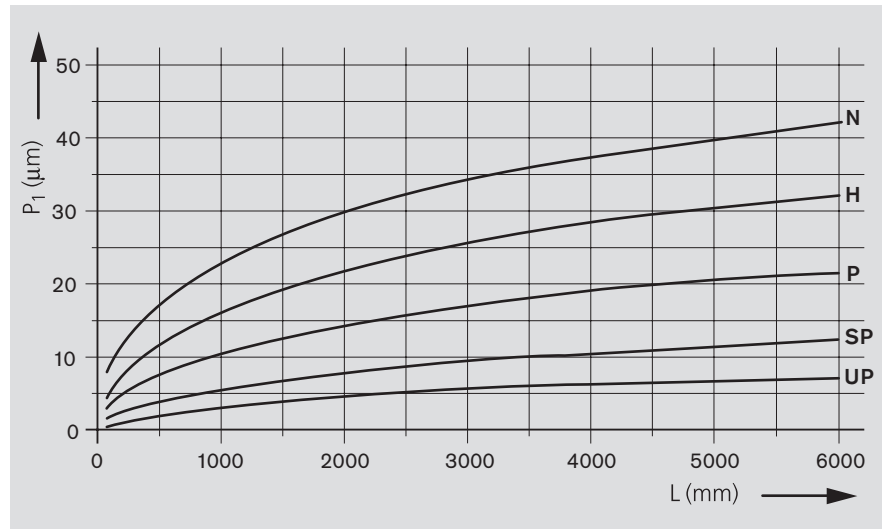

## Tolerances for combination of accuracy classes

Ball Runner Blocks		Ball Guide Rails				
		N ( $\mu\text{m}$ )	H ( $\mu\text{m}$ )	P ( $\mu\text{m}$ )	SP ( $\mu\text{m}$ )	UP ( $\mu\text{m}$ )
N	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 100$	$\pm 48$	$\pm 32$	$\pm 23$	$\pm 19$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 40$	$\pm 28$	$\pm 22$	$\pm 20$	$\pm 19$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	30	30	30	30	30
H	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 92$	$\pm 40$	$\pm 24$	$\pm 15$	$\pm 11$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 32$	$\pm 20$	$\pm 14$	$\pm 12$	$\pm 11$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	15	15	15	15	15
P	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 88$	$\pm 36$	$\pm 20$	$\pm 11$	$\pm 7$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 28$	$\pm 16$	$\pm 10$	$\pm 8$	$\pm 7$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	7	7	7	7	7
XP	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 88$	$\pm 36$	$\pm 20$	$\pm 11$	$\pm 7$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 28$	$\pm 16$	$\pm 10$	$\pm 8$	$\pm 7$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	7	7	7	7	7
SP	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 87$	$\pm 35$	$\pm 19$	$\pm 10$	$\pm 6$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 27$	$\pm 15$	$\pm 9$	$\pm 7$	$\pm 6$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	5	5	5	5	5
UP	Tolerance dimension H ( $\mu\text{m}$ )	$\pm 86$	$\pm 34$	$\pm 18$	$\pm 9$	$\pm 5$
	Tolerance dimension $A_3$ ( $\mu\text{m}$ )	$\pm 26$	$\pm 14$	$\pm 8$	$\pm 6$	$\pm 5$
	Max. difference in dimensions H and $A_3$ on one rail ( $\mu\text{m}$ )	3	3	3	3	3

### Recommendations for combining accuracy classes

#### Recommended for **wide runner block spacing** and **long strokes**:

Ball guide rail in higher accuracy class than ball runner blocks.

#### Recommended for **close runner block spacing** and **short strokes**:

Ball runner blocks in higher accuracy class than ball guide rail.

### Selection criterion Travel accuracy

Perfected ball entry and exit zones in the runner blocks and optimized spacing of the mounting holes in the guide rails provide very high travel accuracy with very low pulsation.

These high accuracy systems are especially suitable for high-precision machining processes, measurement systems, high-precision scanners, EDM equipment, etc.


(See also "High Precision Ball Runner Blocks" 72)

Selection criteria


## Ball Chain

### Ball chain

Rexroth recommends using a ball chain particularly in applications calling for low noise levels.

Ball runner blocks can be equipped with a ball chain (1) as an option. The ball chain prevents the balls from bumping into each other and ensures smoother travel. This reduces the noise level. Runner blocks with ball chains have fewer load-bearing balls, which may result in lower load and load moment capacities ("Product Overview, with Load Capacities and Load Moments"  8).


Ball runner block with ball chain

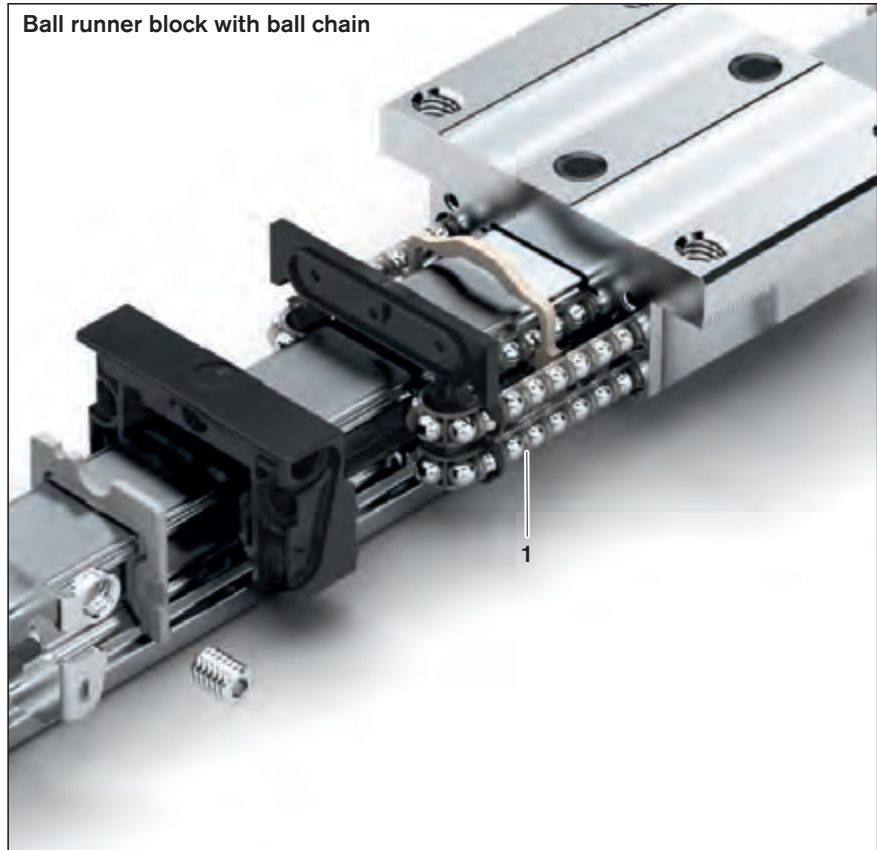

## Seals

### Wiper seals

The sealing plate (2) on the end face protects the runner block internals from dirt particles, shavings and liquids. It also reduces lubricant drag-out. Optimized sealing lip geometry results in minimal friction. Sealing plates are available with black standard seals (SS), beige low-friction seals (LS), or green double-lipped seals (DS).

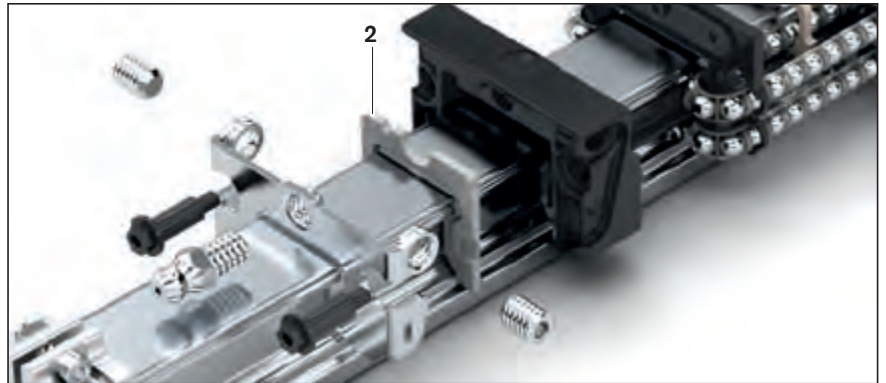

### Low-friction seal (LS)


The low-friction seal was developed for applications requiring especially smooth running with minimal lubricant drag-out. It consists of an open-pored polyurethane foam and has only limited wiping action.

### Standard seal (SS)

The standard seal is sufficient for most applications. It offers good wiping action while still permitting long relubrication intervals.

### Double-lipped seal (DS)

Rexroth recommends using the double-lipped seal for applications where the rail guide is exposed to high levels of contamination such as metal chips, wood dust, metalworking fluids, etc. This seal provides excellent wiping action, but friction levels will be higher and the relubrication intervals are shorter.

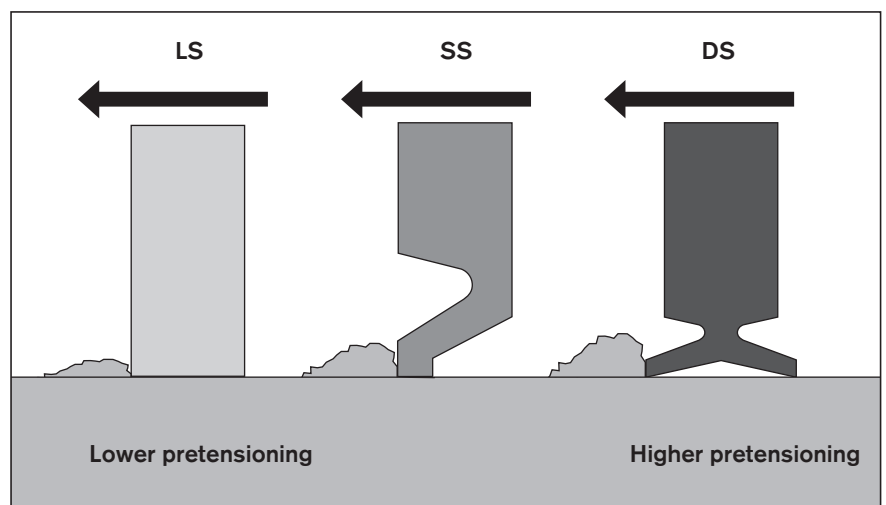

### Sealing action and resistance to movement

The resistance to movement is influenced by the seal's geometry and the material it is made of.


The chart at right shows the sealing action and resistance to movement in relation to the seal design.

#### Key to illustration

**LS** = Low-friction seal

**SS** = Standard seal, universal seal with good sealing action

**DS** = Double-lipped seal, seal with very good sealing action

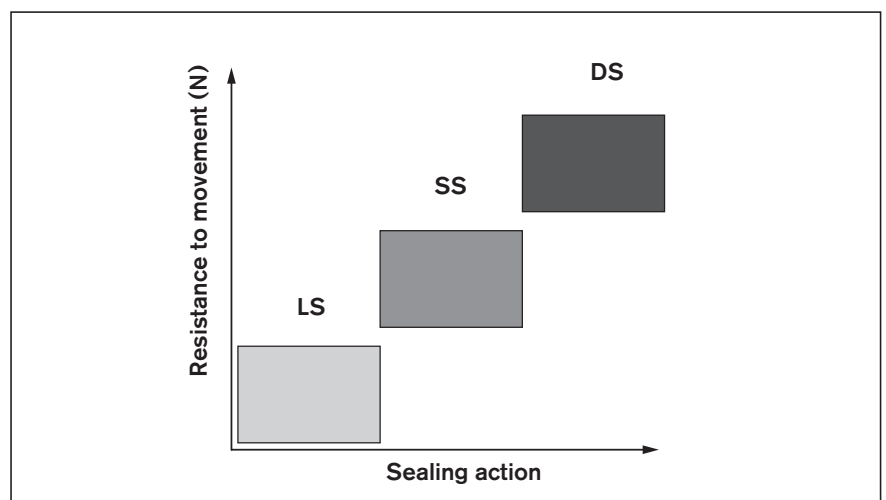

## Selection Criteria

## Materials


Rexroth offers Ball Runner Blocks in a variety of materials to meet the requirements of different applications.

**A** Standard Ball Runner Block made of steel

The most commonly used version, made of carbon steel.

An economical solution, but provides no protection against corrosion.

It is, however, sufficient for most industrial machinery applications.

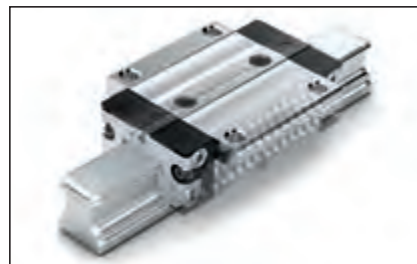

**B** High-Speed Ball Runner Block made of steel

Basically the same as the standard steel runner block, but with ceramic balls instead of steel ones. Since the ceramic material is less dense than steel, the forces in the recirculation zones of the ball circuits remain the same even at the higher permissible travel speed.

As a result, there is no reduction in life expectancy, even when the system is operated at speeds of up to 10 m/s. The load capacities and moments are slightly lower than those of the standard version.




**Ball Runner Blocks with limited corrosion resistance**

**C** Ball Runner Block made of aluminum

The ball runner block body is made of a wrought aluminum alloy. The balls, steel inserts, and the mounting screws at the end face are made of carbon steel. The runner blocks have the same load capacities as the standard version. Since the yield point of aluminum is lower than that of steel, the load-bearing capability of the aluminum runner blocks is limited by  $F_{max}$  and  $M_{max}$ .

An economical alternative offering limited corrosion protection.

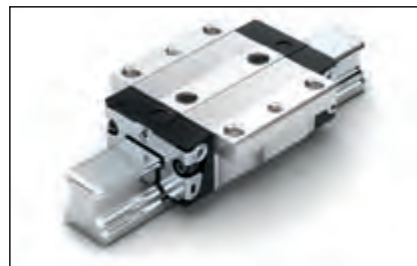

**Corrosion-Resistant Ball Runner Blocks**

**D** Resist NR

The ball runner block body is made of a corrosion-resistant material. Offers limited corrosion protection. The balls, steel inserts, and the mounting screws at the end face are made of carbon steel. The runner blocks have the same load capacities and moments as the standard versions.

Rexroth recommends this version for applications requiring corrosion protection. Fast delivery.

**E** Resist NR II

All of the ball runner block parts are made of a corrosion-resistant material.


These runner blocks offer the greatest possible protection against corrosion with only a slight reduction in load capacities and moments.

**F** Resist CR

The ball runner block body is provided with a corrosion-resistant matte-silver hard chrome-plated coating. The balls, steel inserts, and the mounting screws at the end face are made of carbon steel. The runner blocks have the same load capacities and moments as the standard versions.

An alternative when the NR version is not available.

## Material specifications

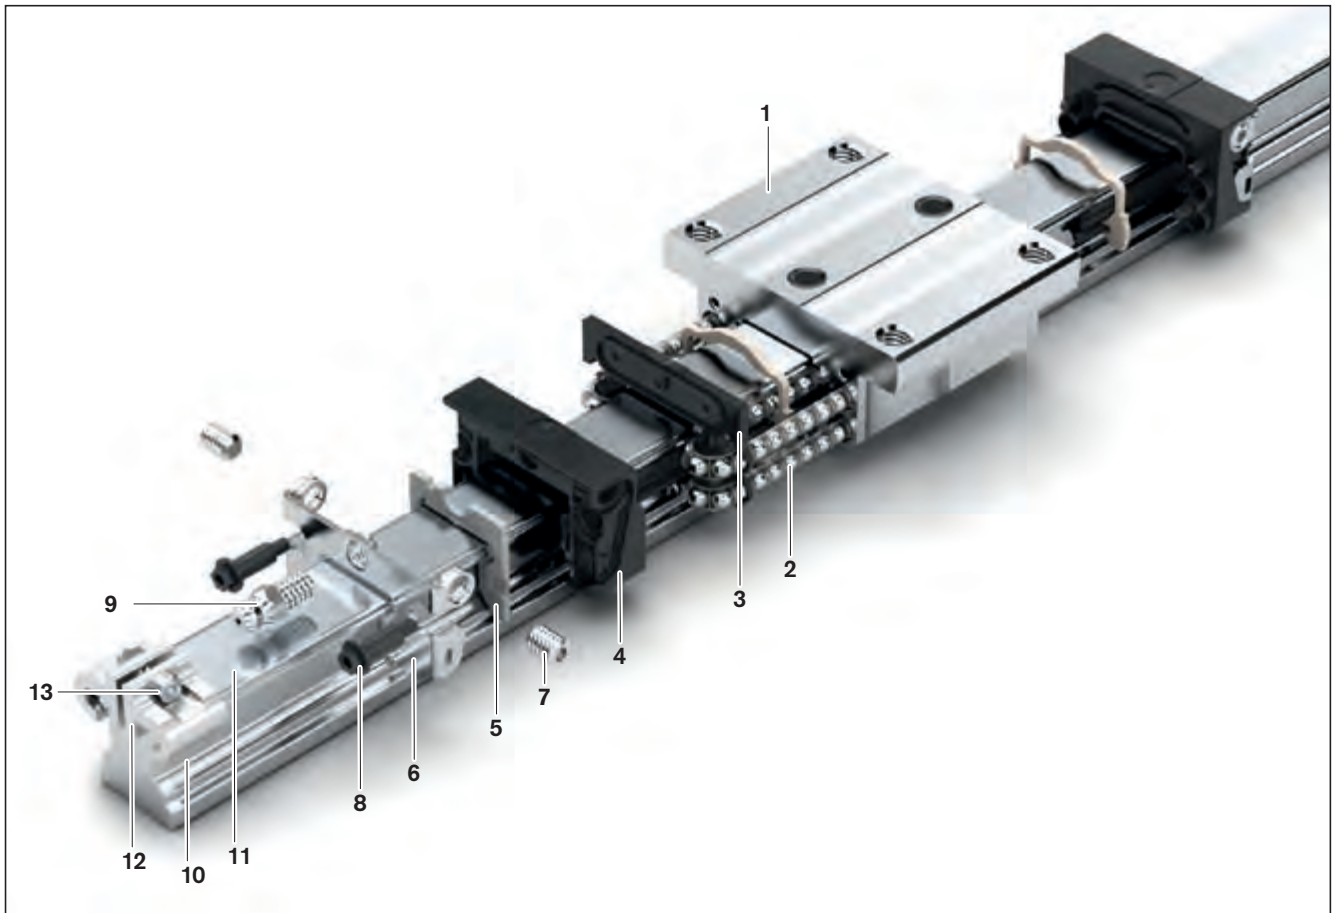

Item	Part	Ball runner block					
		A Steel	B Steel (high-speed)	C Aluminium	D Resist NR	E Resist NR II	F Resist CR
1	Ball runner block body	Heat-treated steel	Heat-treated steel	Wrought aluminum alloy	Corrosion-resistant steel 1.4122	Corrosion-resistant steel 1.4122	Heat-treated steel, chrome-plated
2	Balls	Antifriction bearing steel	Si <sub>3</sub> N <sub>4</sub>	Antifriction bearing steel	Antifriction bearing steel	Corrosion-resistant steel 1.4112	Antifriction bearing steel
3	Recirculation plate	Plastic TEE-E					
4	Ball guide	Plastic POM (PA6.6)					
5	Sealing plate	Plastic TEE-E					
6	Threaded plate	Corrosion-resistant steel 1.4306					
7	Set screw	Corrosion-resistant steel 1.4301					
8	Flanged screws	Carbon steel				Corrosion-resistant steel 1.4303	Carbon steel
9	Lube nipple						
Item	Part	Ball guide rail					
10	Ball guide rail	Heat-treated steel				Corrosion-resistant steel 1.4116	Heat-treated steel
11	Cover strip	Corrosion-resistant steel 1.4310					
12	Strip clamp	Anodized aluminum					
13	Clamping screw with nut	Corrosion-resistant steel 1.4301					



Standard Ball Runner Blocks made of steel

## Product Description

### Characteristic features

- Same load capability in all four main load directions
- Low noise level and outstanding travel performance
- Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- Lube ports with metal threads on all sides<sup>1)</sup>
- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class
- Optimum system rigidity through preloaded O-arrangement
- Integrated, inductive and wear-free measuring system as an option
- Top logistics that are unique worldwide due to interchangeability of components within each accuracy class
- Attachments can be bolted to ball runner blocks from above or below<sup>1)</sup>
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block<sup>1)</sup>
- Extensive range of accessories
- Mounting threads provided on end faces for fixing of all add-on elements

### Further highlights

- High rigidity in all load directions – permits applications with just one runner block per rail
- Integrated all-round sealing
- High torque load capacity
- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Smooth, light running thanks to optimized ball recirculation and ball or ball chain guidance
- Various preload classes
- Ball runner blocks pre-lubricated in factory<sup>1)</sup>
- Available with ball chain as an option<sup>1)</sup>


### Corrosion protection (optional)<sup>1)</sup>

- Resist NR:  
Ball runner block body made of corrosion-resistant steel per EN 10088
- Resist NR II:  
Ball runner block body, ball guide rail and all steel parts made from corrosion-resistant steel per EN 10088
- Resist CR:  
Ball runner block body and ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating

1) depends on type



**Standard Ball Rail System with  
Ball Runner Block FNS made of steel  
(components and assembly)**

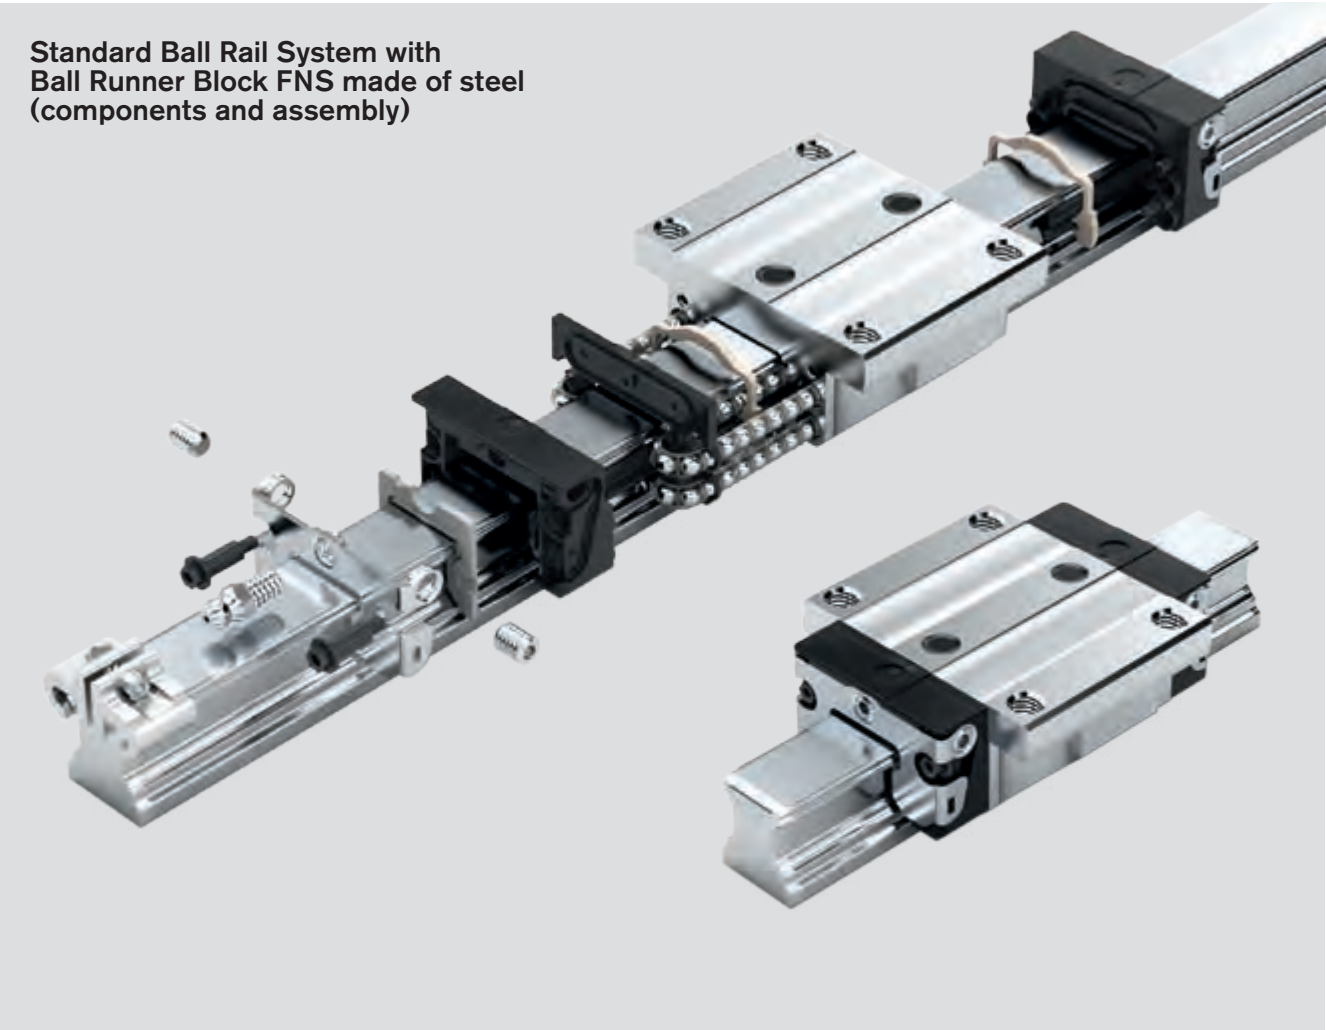


Standard Ball Runner Blocks made of steel


# Product Description

Overview of Standard and Heavy Duty Ball Runner Block models made of steel

## Standard Ball Runner Blocks<sup>1)</sup> up to size 45

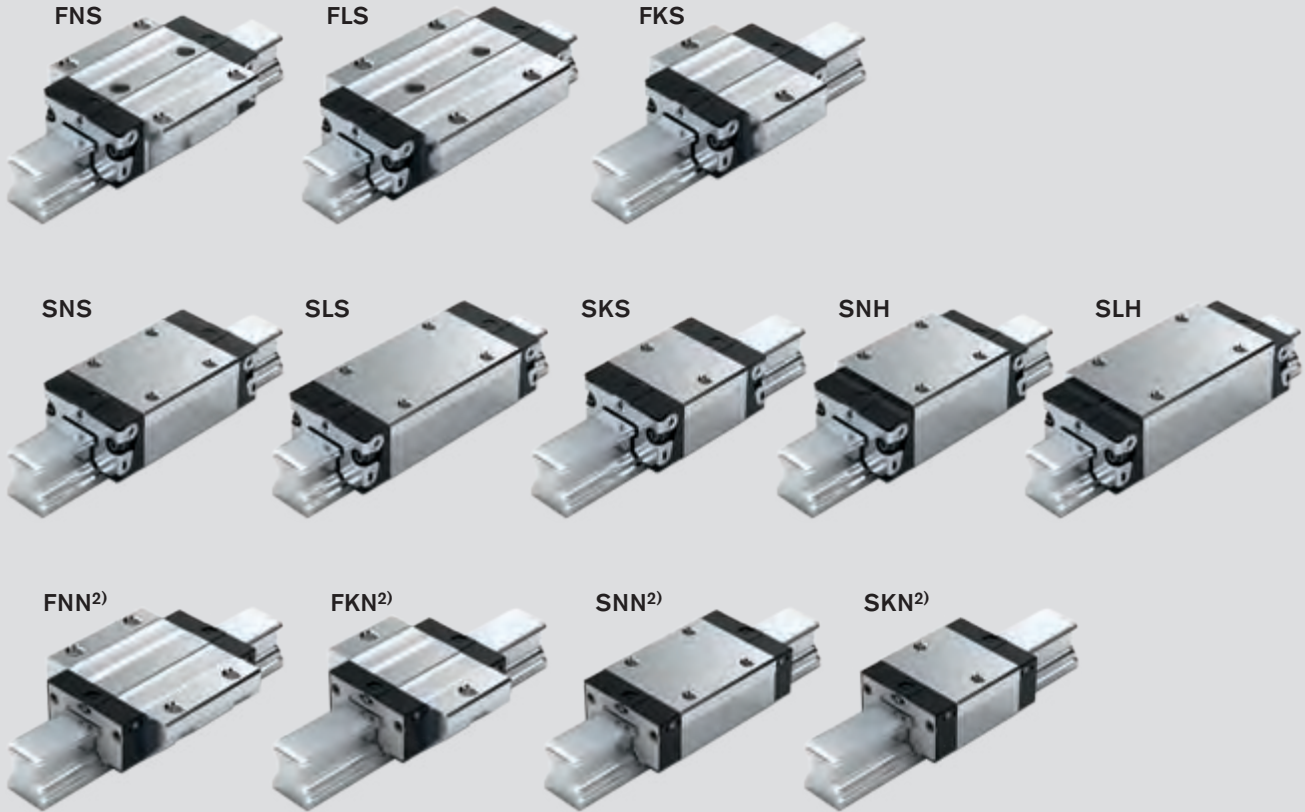

## Heavy Duty Ball Runner Blocks<sup>2)</sup> from size 55

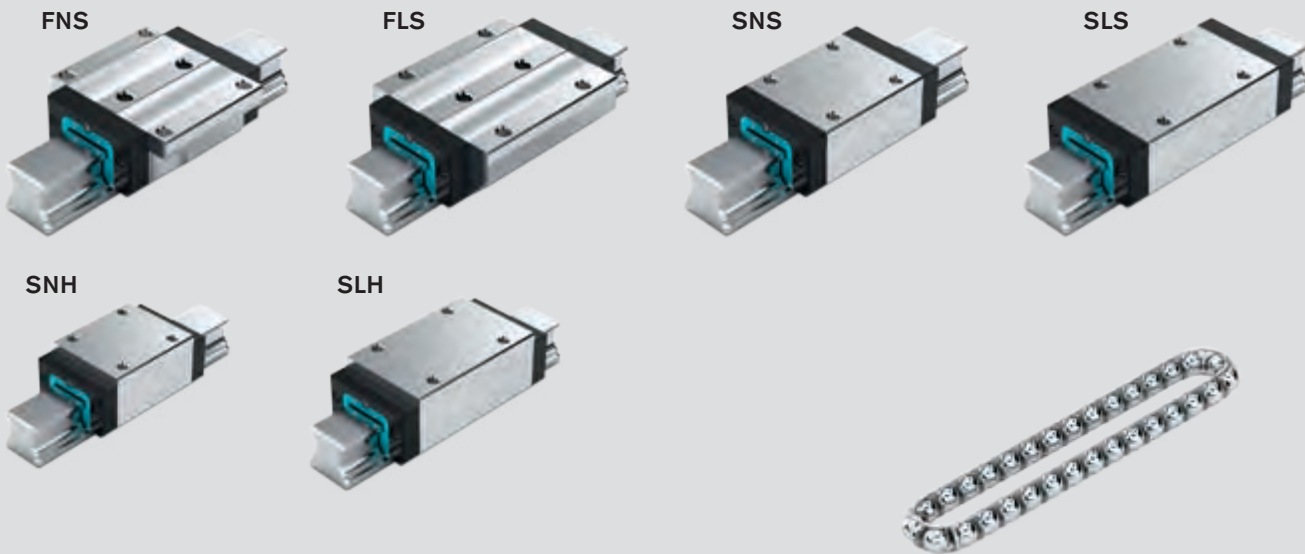

1) With ball chain  
2) Without ball chain

**Ball chain (optional)**  
– Optimizes noise levels

# Ordering Example

## Ordering of Ball Runner Blocks

The part number is composed of the code numbers for the individual options. Each option (grey background) has its own code number (white background).

The following ordering example applies to all ball runner blocks.

### Explanation of the option "Ball runner block with size"

The design style of the ball runner block – in this example, a Standard Ball Runner Block FNS – is specified on the respective product page.

Coding in the part number:



### Ordering example

- Options:
- Ball Runner Block FNS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain

Part number: **R1651 713 20**

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
							SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS	
15	R1651 1	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	–	22	23	–
					–	3	2	20	–	–	22	–	–
20	R1651 8	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
25	R1651 2	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
30	R1651 7	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
35	R1651 3	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
45	R1651 4	9	1	2	4	3	–	20	–	–	22	–	–
					4	3	2	20	–	2Z	22	–	2Y
					–	3	2	20	–	2Z	22	–	2Y
e.g.	R1651 7		1			3		20					

1) Only with accuracy classes N and H

### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C

### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

### Key to table

- Gray numbers = version/combination not preferred (longer delivery times in some cases)

Definition		Code (example)		
		F	N	S
<b>Ball Runner Block design style</b>				
<b>Width</b>	Flanged Slimline Wide Compact	F		
<b>Length</b>	Normal Long Short		N	
<b>Height</b>	Standard height High Low			S

Standard Ball Runner Blocks made of steel

## FNS – Flanged, normal, standard height

### R1651 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$








Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks FNS

- Heavy Duty Ball Runner Blocks made of steel, size 55 and 65  60
- High Precision Ball Runner Blocks made of steel  72
- High-Speed Ball Runner Blocks made of steel  84
- Ball Runner Blocks made of aluminum  94
- Corrosion-resistant Ball Runner Blocks
  - Resist NR  100
  - Resist NR II  104
  - Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

#### Ordering example

Options:

- Ball Runner Block FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1651 713 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1651 1	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	–	22	23	–
					–	3	2	20	–	–	22	–	–
20	R1651 8	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
25	R1651 2	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
30	R1651 7	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
35	R1651 3	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
45	R1651 4	9	1	2	4	3	–	20	–	–	22	–	–
					4	3	2	20	–	2Z	22	–	2Y
					–	3	2	20	–	2Z	22	–	2Y
e.g.	R1651 7		1			3		20					

1) Only with accuracy classes N and H

#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C



#### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

#### Key to table

- Gray numbers = version/combination not preferred (longer delivery times in some cases)

**Ball Runner Blocks FNS**

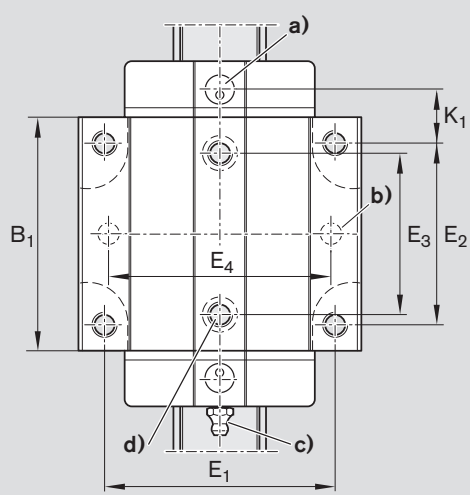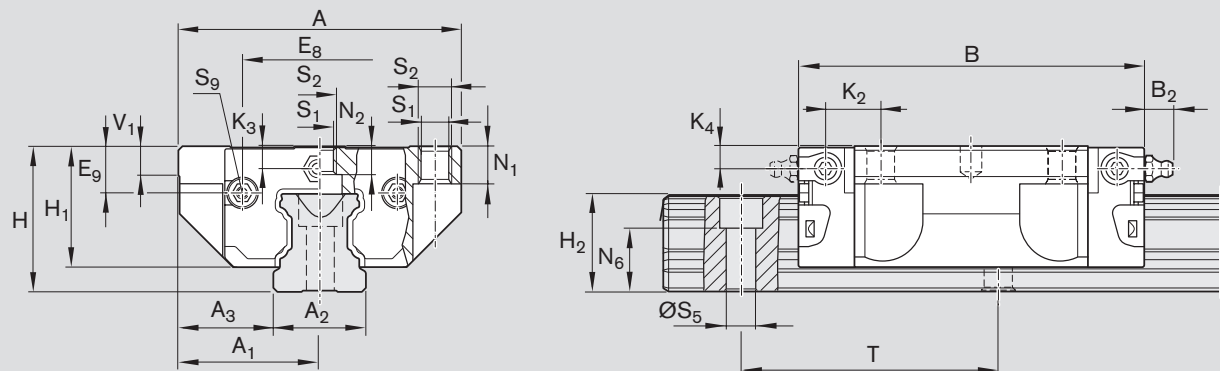

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 45:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 258).
- b) Recommended position for pin holes (dimensions  $E_4$  ☞ 235).  
 Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- c) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 45:  
 Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted). Connection possible at all sides.
- d) For manufacturing reasons, there may be plugs at these positions.  
 These must be removed before mounting.

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	58.2	39.2	38	30	26	24.55	6.70	24	19.90	16.30	16.20	8.00	9.6	3.20	3.20
20	63	31.5	20	21.5	75.0	49.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	11.80	11.8	3.35	3.35
25	70	35.0	23	23.5	86.2	57.8	57	45	40	38.30	11.50	36	29.90	24.45	24.25	12.45	13.6	5.50	5.50
30	90	45.0	28	31.0	97.7	67.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	14.00	15.7	6.05	6.05
35	100	50.0	34	33.0	110.5	77.0	82	62	52	58.00	17.35	48	40.40	32.15	31.85	14.50	16.0	6.90	6.90
45	120	60.0	45	37.5	137.6	97.0	100	80	60	69.80	20.90	60	50.30	40.15	39.85	17.30	19.3	8.20	8.20

Size	Dimensions (mm)										Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	5.2	4.40	10.3	4.3	M5	4.4	M2.5x3.5	60	5.0	0.20	7 800	13 500	74	130	40	71	
20	7.7	5.20	13.2	5.3	M6	6.0	M3x5	60	6.0	0.45	18 800	24 400	240	310	130	165	
25	9.3	7.00	15.2	6.7	M8	7.0	M3x5	60	7.5	0.65	22 800	30 400	320	430	180	240	
30	11.0	7.90	17.0	8.5	M10	9.0	M3x5	80	7.0	1.10	31 700	41 300	540	720	290	380	
35	12.0	10.15	20.5	8.5	M10	9.0	M3x5	80	8.0	1.60	41 900	54 000	890	1 160	440	565	
45	15.0	12.40	23.5	10.4	M12	14.0	M4x7	105	10.0	3.00	68 100	85 700	1 830	2 310	890	1 130	

1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip  
 3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## FLS – Flanged, long, standard height

### R1653 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$





Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks FLS

- Heavy Duty Ball Runner Blocks made of steel, size 55 and 65  62
- High Precision Ball Runner Blocks made of steel  72
- Corrosion-resistant Ball Runner Blocks  
Resist NR  100  
Resist CR  108



#### Note

Can be used on all Ball Guide Rails SNS.

#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1653 1	9	1		4	3	–	20	21	–	22	23	–
				2	4	3	2	20	21	–	22	23	–
				–	–	3	2	20	–	–	22	–	–
20	R1653 8	9	1		4	3	–	20	21	–	22	23	–
				2	4	3	2	20	21	2Z	22	23	2Y
				–	–	3	2	20	–	2Z	22	–	2Y
25	R1653 2	9	1		4	3	–	20	21	–	22	23	–
				2	4	3	2	20	21	2Z	22	23	2Y
				–	–	3	2	20	–	2Z	22	–	2Y
30	R1653 7	9	1		4	3	–	20	21	–	22	23	–
				2	4	3	2	20	21	2Z	22	23	2Y
				–	–	3	2	20	–	2Z	22	–	2Y
35	R1653 3	9	1		4	3	–	20	21	–	22	23	–
				2	4	3	2	20	21	2Z	22	23	2Y
				–	–	3	2	20	–	2Z	22	–	2Y
45	R1653 4	9	1		4	3	–	20	–	–	22	–	–
				2	4	3	2	20	–	2Z	22	–	2Y
				–	–	3	2	20	–	2Z	22	–	2Y
e.g.	R1653 7		1			3		20					

1) Only with accuracy classes N and H

#### Ordering example

Options:

- Ball Runner Block FLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1653 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

C2 = preload 8% C

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal


#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)



**Ball Runner Blocks FLS**

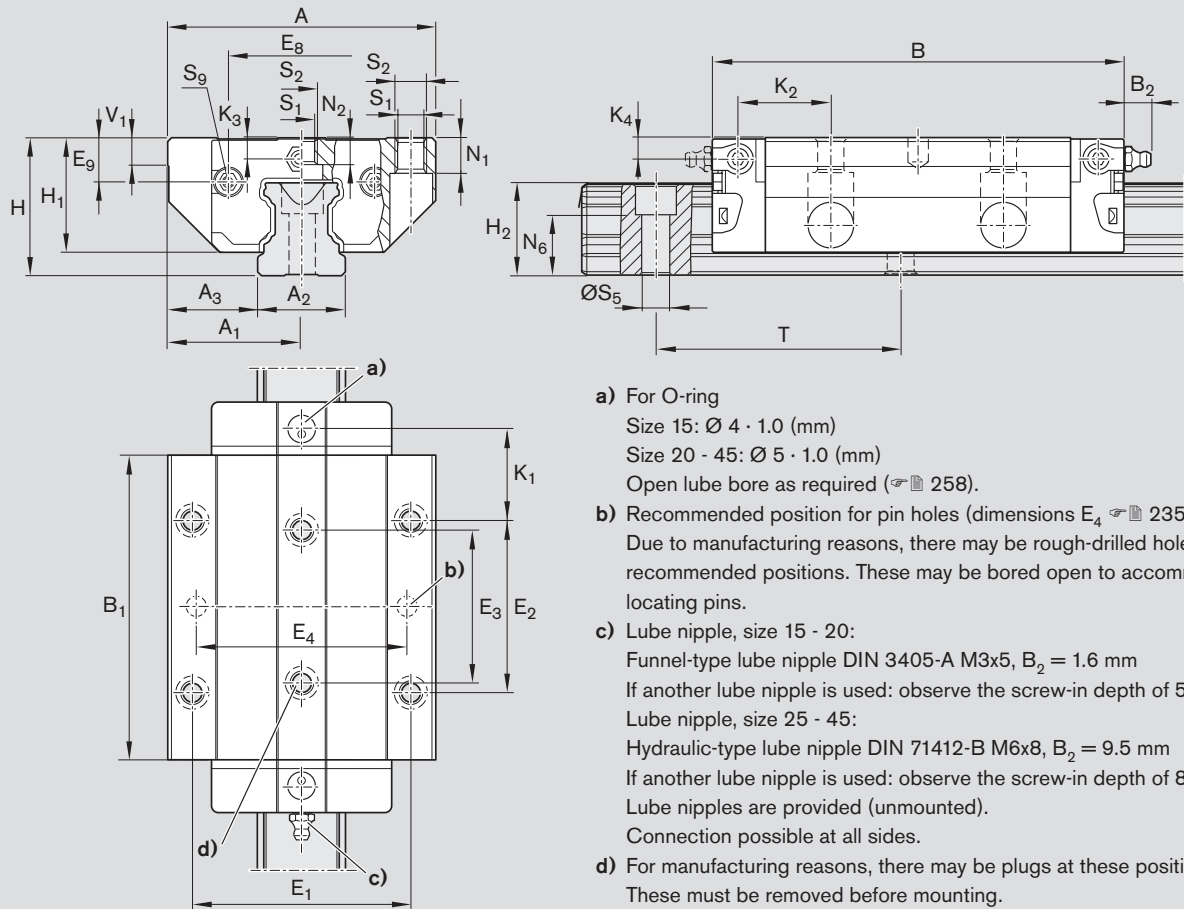

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 45:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required ( $\text{Ø } \text{H } 258$ ).
- b) Recommended position for pin holes (dimensions  $E_4$   $\text{Ø } \text{H } 235$ ).  
 Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- c) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 45:  
 Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.
- d) For manufacturing reasons, there may be plugs at these positions.  
 These must be removed before mounting.

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	72.6	53.6	38	30	26	24.55	6.70	24	19.90	16.30	16.20	15.20	16.80	3.20	3.20
20	63	31.5	20	21.5	91.0	65.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	19.80	19.80	3.35	3.35
25	70	35.0	23	23.5	107.9	79.5	57	45	40	38.30	11.50	36	29.90	24.45	24.25	23.30	24.45	5.50	5.50
30	90	45.0	28	31.0	119.7	89.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	25.00	26.70	6.05	6.05
35	100	50.0	34	33.0	139.0	105.5	82	62	52	58.00	17.35	48	40.40	32.15	31.85	28.75	30.25	6.90	6.90
45	120	60.0	45	37.5	174.1	133.5	100	80	60	69.80	20.90	60	50.30	40.15	39.85	35.50	37.50	8.20	8.20

Size	Dimensions (mm)										Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	5.2	4.40	10.3	4.3	M5	4.4	M2.5x3.5	60	5.0	0.30	10 000	20 200	96	190	75	150	
20	7.7	5.20	13.2	5.3	M6	6.0	M3x5	60	6.0	0.55	24 400	35 200	310	450	225	330	
25	9.3	7.00	15.2	6.7	M8	7.0	M3x5	60	7.5	0.90	30 400	45 500	430	650	345	510	
30	11.0	7.90	17.0	8.5	M10	9.0	M3x5	80	7.0	1.50	40 000	57 800	690	1 000	495	715	
35	12.0	10.15	20.5	8.5	M10	9.0	M3x5	80	8.0	2.25	55 600	81 000	1 200	1 740	830	1 215	
45	15.0	12.40	23.5	10.4	M12	14.0	M4x7	105	10.0	4.30	90 400	128 500	2 440	3 470	1 700	2 425	

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain  $\text{Ø } \text{H } 8$ .  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## FKS – Flanged, short, standard height

### R1665 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$




Acceleration:  $a_{max} = 500 \text{ m/s}^2$

(If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks FKS

- Super Ball Runner Blocks made of steel  88
- Corrosion-resistant Ball Runner Blocks
  - Resist NR  100
  - Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block					
		C0	C1	N	H	without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R1665 1	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	–	22	23	–
20	R1665 8	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
25	R1665 2	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
30	R1665 7	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
35	R1665 3	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
e.g.	R1665 7		1		3	20					

#### Ordering example

Options:

- Ball Runner Block FKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1665 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal

#### Key to table


Gray numbers

= version/combination not preferred

(longer delivery times in some cases)



Ball Runner Blocks FKS

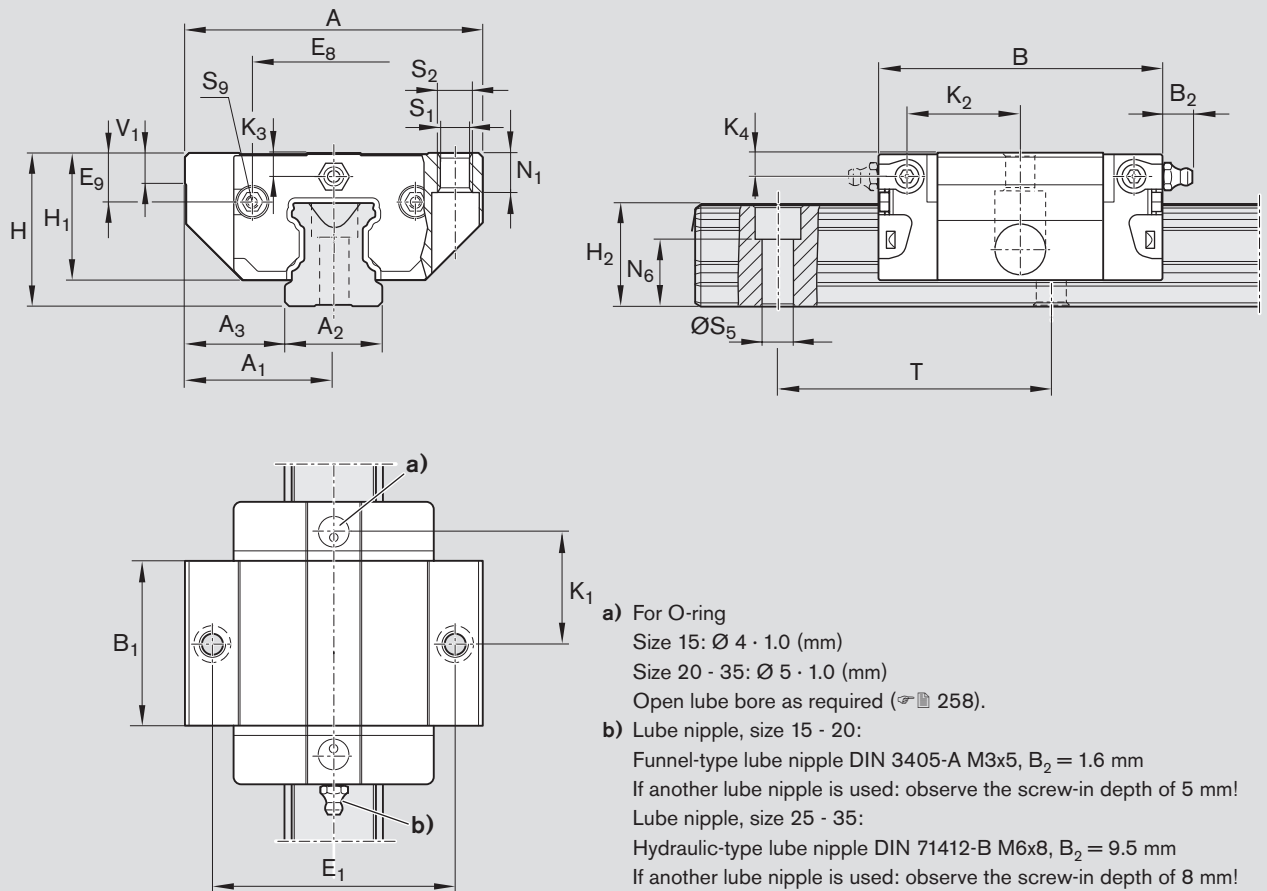

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 35:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 258).
- b) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 35:  
 Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	44.7	25.7	38	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	63	31.5	20	21.5	57.3	31.9	53	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	70	35.0	23	23.5	67.0	38.6	57	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	90	45.0	28	31.0	75.3	45.0	72	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	100	50.0	34	33.0	84.9	51.4	82	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>1</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	5.2	10.3	4.3	M5	4.4	M2.5x3.5	60	5.0	0.15	5 400	8 100	52	80	19	28	
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.30	12 400	13 600	150	170	52	58	
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.50	15 900	18 200	230	260	82	94	
30	11.0	17.0	8.5	M10	9.0	M3x5	80	7.0	0.80	22 100	24 800	380	430	133	150	
35	12.0	20.5	8.5	M10	9.0	M3x5	80	8.0	1.20	29 300	32 400	640	700	200	220	

1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip  
 3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SNS – Slimline, normal, standard height

### R1622 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$








Acceleration:  $a_{max} = 500 \text{ m/s}^2$

(If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks SNS

- Heavy Duty Ball Runner Blocks made of steel, size 55 and 65  64
- High Precision Ball Runner Blocks made of steel  72
- High-Speed Ball Runner Blocks made of steel  84
- Ball Runner Blocks made of aluminum  94
- Corrosion-resistant Ball Runner Blocks
  - Resist NR  100
  - Resist NR II  104
  - Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

#### Ordering example

Options:

- Ball Runner Block SNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1622 713 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1622 1	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	–	22	23	–
				2	–	3	2	20	–	–	22	–	–
20	R1622 8	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
25	R1622 2	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
30	R1622 7	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
35	R1622 3	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
45	R1622 4	9			4	3	–	20	–	–	22	–	–
			1		4	3	2	20	–	2Z	22	–	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
e.g.	R1622 7		1			3		20					

1) Only with accuracy classes N and H

#### Preload classes

C0 = without preload

C1 = preload 2% C

C2 = preload 8% C

#### Seals

SS = standard seal

LS = low-friction seal


DS = double-lipped seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

## Ball Runner Blocks SNS

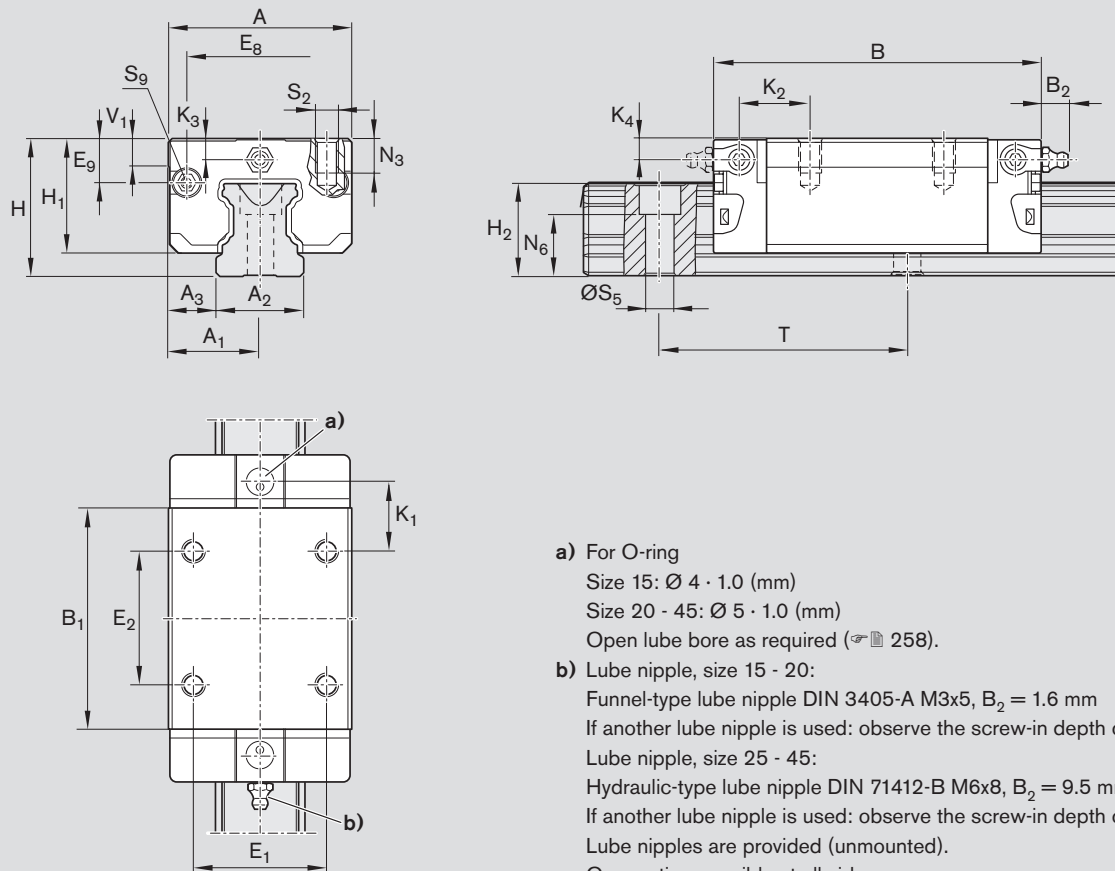

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>	
15	34	17	15	9.5	58.2	39.2	26	26	24.55	6.70	24	19.90	16.30	16.20	10.00	11.60	3.20	3.20	
20	44	22	20	12.0	75.0	49.6	32	36	32.50	7.30	30	25.35	20.75	20.55	13.80	13.80	3.35	3.35	
25	48	24	23	12.5	86.2	57.8	35	35	38.30	11.50	36	29.90	24.45	24.25	17.45	18.60	5.50	5.50	
30	60	30	28	16.0	97.7	67.4	40	40	48.40	14.60	42	35.35	28.55	28.35	20.00	21.70	6.05	6.05	
35	70	35	34	18.0	110.5	77.0	50	50	58.00	17.35	48	40.40	32.15	31.85	20.50	22.00	6.90	6.90	
45	86	43	45	20.5	137.6	97.0	60	60	69.80	20.90	60	50.30	40.15	39.85	27.30	29.30	8.20	8.20	

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C	C <sub>0</sub>		M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>		
15	6.0	10.3	M4	4.4	M2.5x3.5	60	5.0	0.15	7 800	13 500	74	130	40	71		
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.35	18 800	24 400	240	310	130	165		
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.50	22 800	30 400	320	430	180	240		
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.85	31 700	41 300	540	720	290	380		
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.25	41 900	54 000	890	1 160	440	565		
45	18.0	23.5	M10	14.0	M4x7	105	10.0	2.40	68 100	85 700	1 830	2 310	890	1 130		

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain  $\varnothing \text{H} 8$ .

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SLS – Slimline, long, standard height

### R1623 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$





Acceleration:  $a_{\max} = 500 \text{ m/s}^2$


(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks SLS

- Heavy Duty Ball Runner Blocks made of steel, size 55 and 65  66
- High Precision Ball Runner Blocks made of steel  72
- Corrosion-resistant Ball Runner Blocks  
Resist NR  100  
Resist CR  108

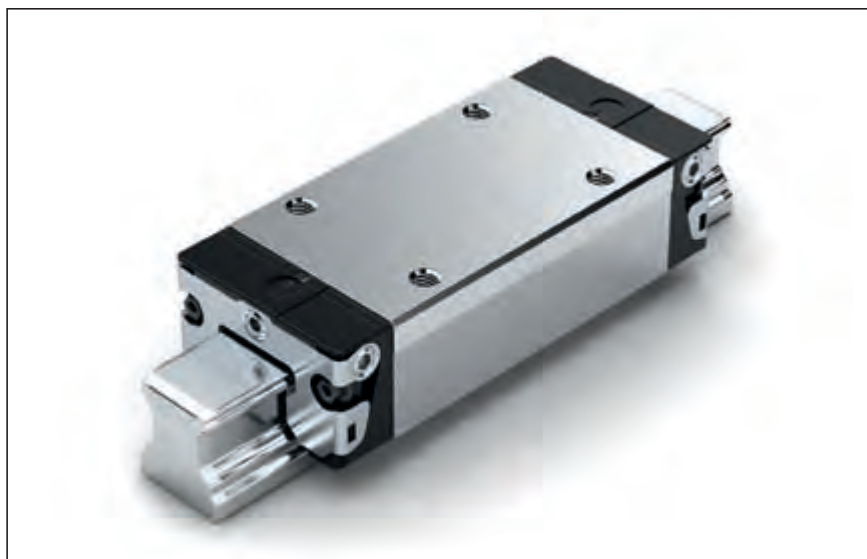

#### Note

Can be used on all Ball Guide Rails SNS.

#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1623 1	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	–	22	23	–
					–	3	2	20	–	–	22	–	–
20	R1623 8	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
25	R1623 2	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
30	R1623 7	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
35	R1623 3	9	1	2	4	3	–	20	21	–	22	23	–
					4	3	2	20	21	2Z	22	23	2Y
					–	3	2	20	–	2Z	22	–	2Y
45	R1623 4	9	1	2	4	3	–	20	–	–	22	–	–
					4	3	2	20	–	2Z	22	–	2Y
					–	3	2	20	–	2Z	22	–	2Y
e.g.	R1623 7		1			3		20					

1) Only with accuracy classes N and H

#### Ordering example

Options:

- Ball Runner Block SLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1623 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

C2 = preload 8% C

#### Seals

SS = standard seal

LS = low-friction seal


DS = double-lipped seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

## Ball Runner Blocks SLS

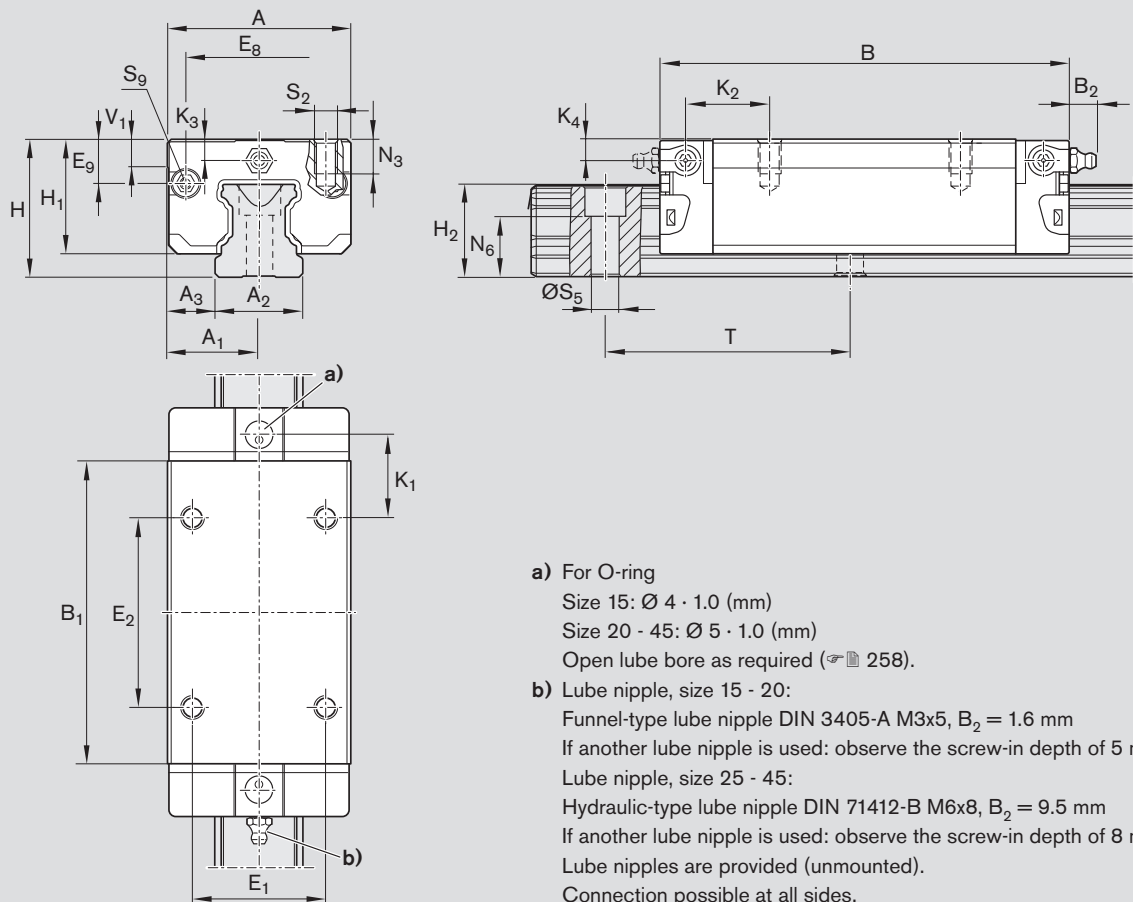

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 45:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required ( $\varnothing \text{H } 258$ ).
- b) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 45:  
 Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	72.6	53.6	26	26	24.55	6.70	24	19.90	16.30	16.20	17.20	18.80	3.20	3.20
20	44	22	20	12.0	91.0	65.6	32	50	32.50	7.30	30	25.35	20.75	20.55	14.80	14.80	3.35	3.35
25	48	24	23	12.5	107.9	79.5	35	50	38.30	11.50	36	29.90	24.45	24.25	20.80	21.95	5.50	5.50
30	60	30	28	16.0	119.7	89.4	40	60	48.40	14.60	42	35.35	28.55	28.35	21.00	22.70	6.05	6.05
35	70	35	34	18.0	139.0	105.5	50	72	58.00	17.35	48	40.40	32.15	31.85	23.75	25.25	6.90	6.90
45	86	43	45	20.5	174.1	133.5	60	80	69.80	20.90	60	50.30	40.15	39.85	35.50	37.50	8.20	8.20

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	6.0	10.3	M4	4.4	M2.5x3.5	60	5.0	0.20	10 000	20 200	96	190	75	150	
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.45	24 400	35 200	310	450	225	330	
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.65	30 400	45 500	430	650	345	510	
30	12.0	17.0	M8	9.0	M3x5	80	7.0	1.10	40 000	57 800	690	1 000	495	715	
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.70	55 600	81 000	1 200	1 740	830	1 215	
45	18.0	23.5	M10	14.0	M4x7	105	10.0	3.20	90 400	128 500	2 440	3 470	1 700	2 425	

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain  $\varnothing \text{H } 8$ . Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SKS – Slimline, short, standard height

### R1666 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$




Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks SKS

- Super Ball Runner Blocks made of steel  88
- Corrosion-resistant Ball Runner Blocks
  - Resist NR  100
  - Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block					
		C0	C1	N	H	without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R1666 1	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	–	22	23	–
20	R1666 8	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
25	R1666 2	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
30	R1666 7	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
35	R1666 3	9		4	3	20	21	–	22	23	–
			1	4	3	20	21	2Z	22	23	2Y
e.g.	R1666 7		1		3	20					

#### Ordering example

Options:

- Ball Runner Block SKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1666 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal




#### Key to table

Gray numbers

= version/combination not preferred

(longer delivery times in some cases)

## Ball Runner Blocks SKS

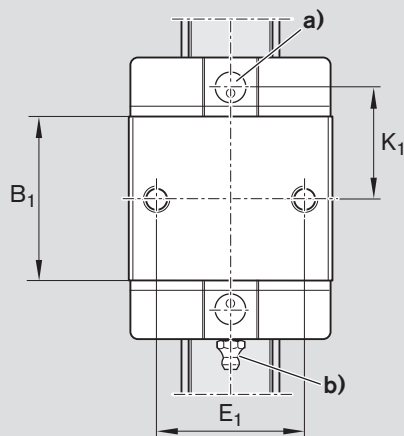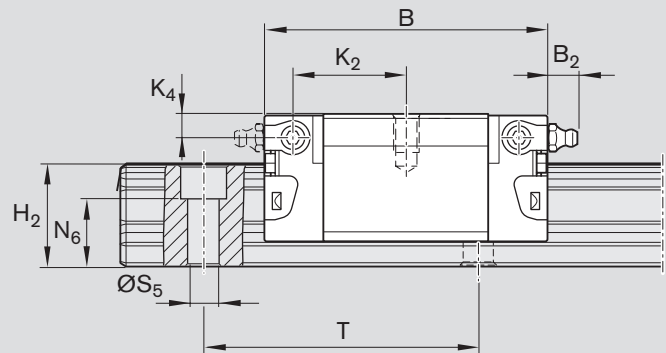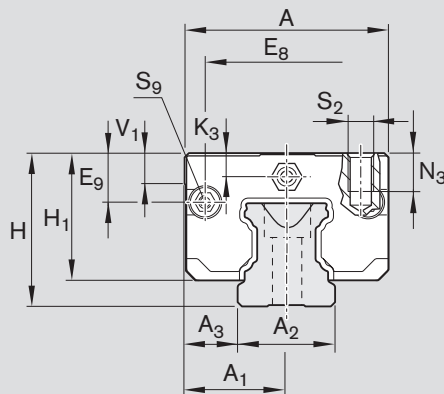

## a) For O-ring

Size 15:  $\text{Ø} 4 \cdot 1.0$  (mm)Size 20 - 35:  $\text{Ø} 5 \cdot 1.0$  (mm)Open lube bore as required ( $\varnothing \text{H} 258$ ).

## b) Lube nipple, size 15 - 20:

Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm

If another lube nipple is used: observe the screw-in depth of 5 mm!

Lube nipple, size 25 - 35:

Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm

If another lube nipple is used: observe the screw-in depth of 8 mm!

Lube nipples are provided (unmounted).

Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	44.7	25.7	26	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	44	22	20	12.0	57.3	31.9	32	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	48	24	23	12.5	67.0	38.6	35	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	60	30	28	16.0	75.3	45.0	40	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	70	35	34	18.0	84.9	51.4	50	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	6.0	10.3	M4	4.4	M2.5x3.5	60	5.0	0.10	5 400	8 100	52	80	19	28	
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.25	12 400	13 600	150	170	52	58	
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.35	15 900	18 200	230	260	82	94	
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.60	22 100	24 800	380	430	133	150	
35	13.0	20.5	M8	9.0	M3x5	80	8.0	0.90	29 300	32 400	640	700	200	220	

1) Dimension H<sub>2</sub> with cover strip2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain  $\varnothing \text{H} 8$ . Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.



Standard Ball Runner Blocks made of steel

## SNH – Slimline, normal, high

### R1621 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$




Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks SNH

- Heavy Duty Ball Runner Blocks made of steel, size 55  68
- High Precision Ball Runner Blocks made of steel  72
- Corrosion-resistant Ball Runner Blocks Resist CR  108



#### Note

Can be used on all Ball Guide Rails SNS.

#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1621 1	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	–	22	23	–
				2	–	3	2	20	–	–	22	–	–
25	R1621 2	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
30	R1621 7	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
35	R1621 3	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
45	R1621 4	9			4	3	–	20	–	–	22	–	–
			1		4	3	2	20	–	2Z	22	–	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
e.g.	R1621 7		1			3		20					

1) Only with accuracy classes N and H

#### Ordering example

Options:

- Ball Runner Block SNH
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1621 713 20

#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C




#### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

#### Key to table

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)

Ball Runner Blocks SNH

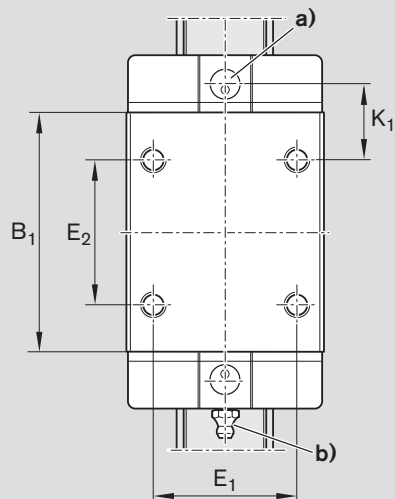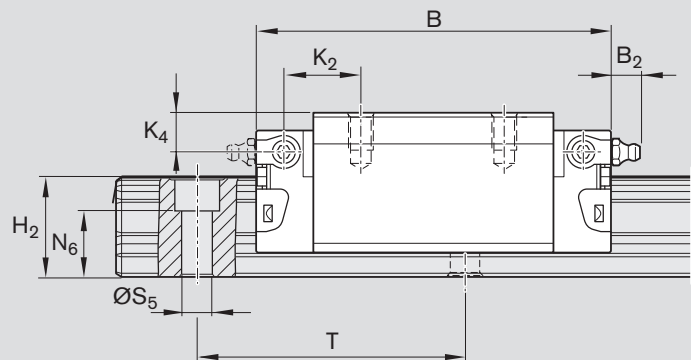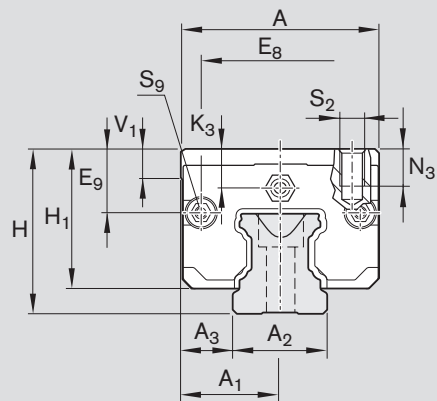

For O-ring

Size 15: Ø 4 · 1.0 (mm)

Size 25 - 45: Ø 5 · 1.0 (mm)

Open lube bore as required and install lube adapter (☞ 258).

a) Lube nipple, size 15:

Funnel-type lube nipple DIN 3405-A M3x5, B<sub>2</sub> = 1.6 mm

If another lube nipple is used: observe the screw-in depth of 5 mm!

Lube nipple, size 25 - 45:

Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 9.5 mm

If another lube nipple is used: observe the screw-in depth of 8 mm!

Lube nipples are provided (unmounted).

Connection possible at all sides.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	58.2	39.2	26	26	24.55	10.70	28	23.90	16.30	16.20	10.00	11.60	7.20	7.20
25	48	24	23	12.5	86.2	57.8	35	35	38.30	15.50	40	33.90	24.45	24.25	17.45	18.60	9.50	9.50
30	60	30	28	16.0	97.7	67.4	40	40	48.40	17.60	45	38.35	28.55	28.35	20.00	21.70	9.05	9.05
35	70	35	34	18.0	110.5	77.0	50	50	58.00	24.35	55	47.40	32.15	31.85	20.50	22.00	13.90	13.90
45	86	43	45	20.5	137.6	97.0	60	60	69.80	30.90	70	60.30	40.15	39.85	27.30	29.30	18.20	18.20

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>10</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	6.0	10.3	M4	4.4	M2.5x3.5	60	5.0	0.20	7 800	13 500	74	130	40	71	
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.60	22 800	30 400	320	430	180	240	
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.95	31 700	41 300	540	720	290	380	
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.55	41 900	54 000	890	1 160	440	565	
45	18.0	23.5	M10	14.0	M4x7	105	10.0	3.00	68 100	85 700	1 830	2 310	890	1 130	

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SLH – Slimline, long, high

### R1624 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$




Acceleration:  $a_{\max} = 500 \text{ m/s}^2$


(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Ball Runner Blocks SLH

- Heavy Duty Ball Runner Blocks made of steel, size 55  70
- High Precision Ball Runner Blocks made of steel  72
- Corrosion-resistant Ball Runner Blocks Resist CR  108

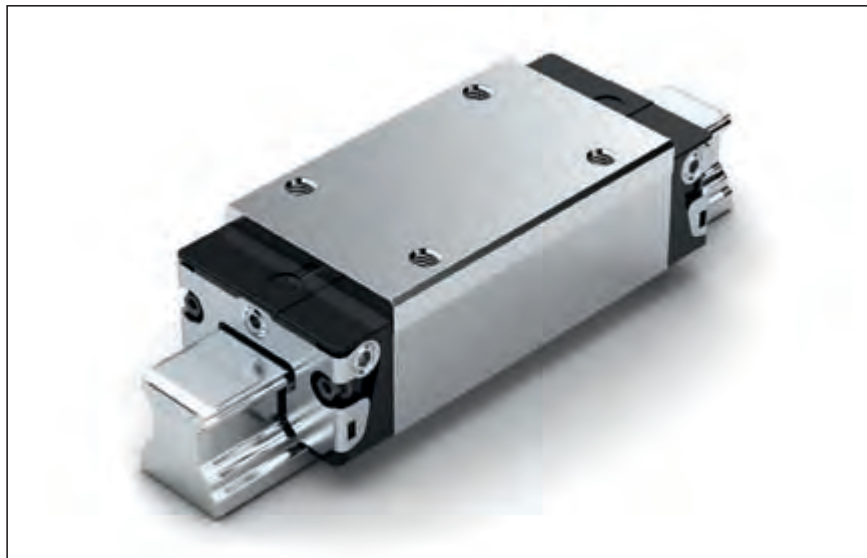

#### Note

Can be used on all Ball Guide Rails SNS.

#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
25	R1624 2	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
30	R1624 7	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
35	R1624 3	9			4	3	–	20	21	–	22	23	–
			1		4	3	2	20	21	2Z	22	23	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
45	R1624 4	9			4	3	–	20	–	–	22	–	–
			1		4	3	2	20	–	2Z	22	–	2Y
				2	–	3	2	20	–	2Z	22	–	2Y
e.g.	R1624 7		1			3		20					

1) Only with accuracy classes N and H

#### Ordering example

Options:

- Ball Runner Block SLH
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1624 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

C2 = preload 8% C

#### Seals

SS = standard seal

LS = low-friction seal


DS = double-lipped seal

#### Key to table

Gray numbers

= version/combination not preferred (longer delivery times in some cases)

**Ball Runner Blocks SLH**

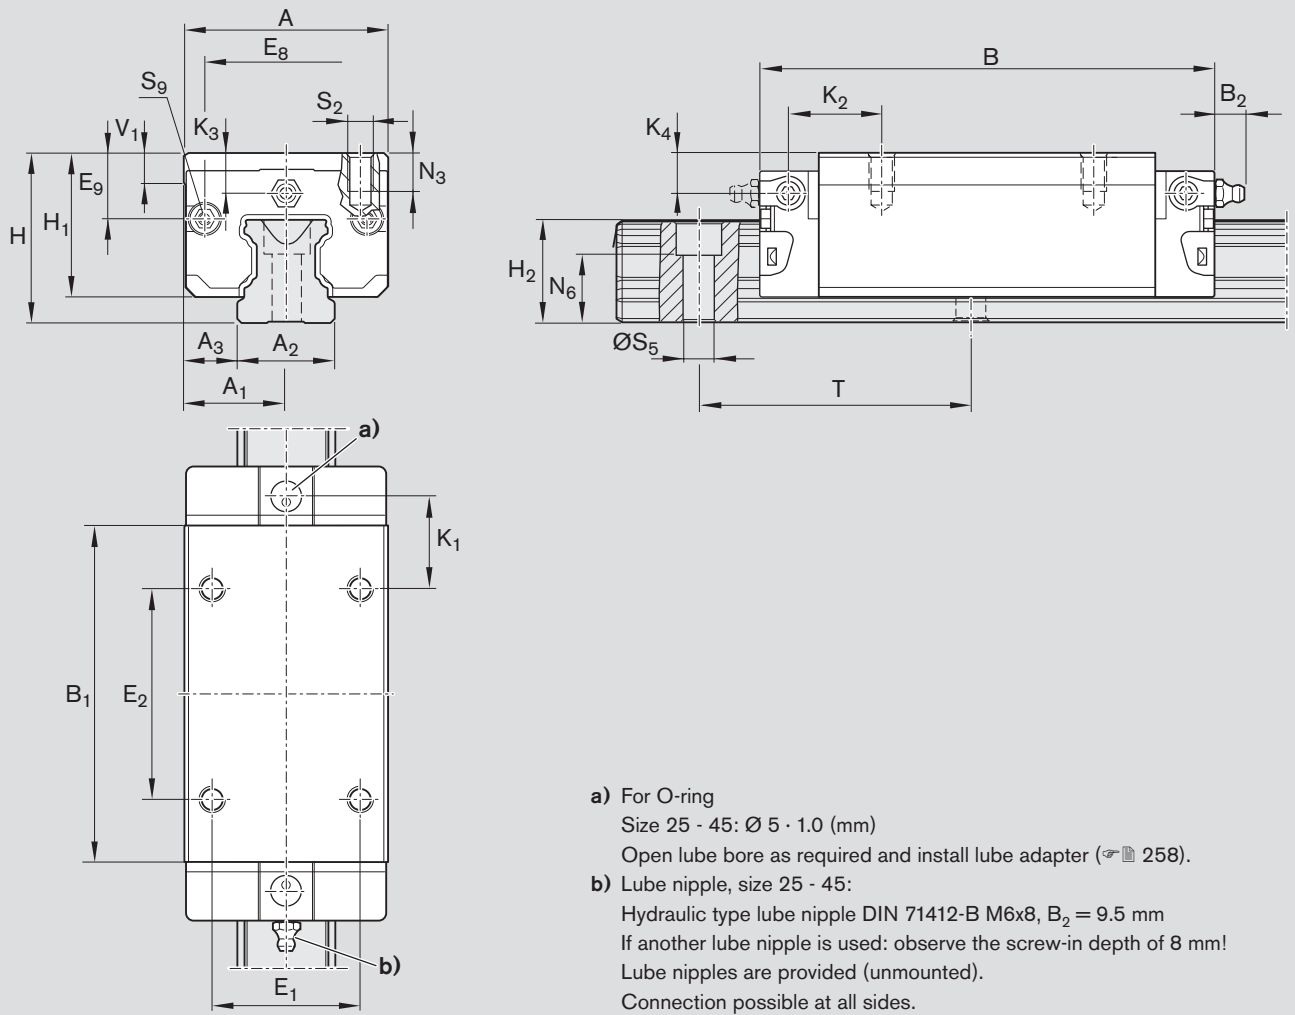

- a) For O-ring  
Size 25 - 45: Ø 5 · 1.0 (mm)  
Open lube bore as required and install lube adapter (☞ 258).
- b) Lube nipple, size 25 - 45:  
Hydraulic type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 9.5 mm  
If another lube nipple is used: observe the screw-in depth of 8 mm!  
Lube nipples are provided (unmounted).  
Connection possible at all sides.

Size	Dimensions (mm)																			
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>		
25	48	24	23	12.5	107.9	79.5	35	50	38.30	15.50	40	33.90	24.45	24.25	20.80	21.95	9.50	9.50		
30	60	30	28	16.0	119.7	89.4	40	60	48.40	17.60	45	38.35	28.55	28.35	21.00	22.70	9.05	9.05		
35	70	35	34	18.0	139.0	105.5	50	72	58.00	24.35	55	47.40	32.15	31.85	23.75	25.25	13.90	13.90		
45	86	43	45	20.5	174.1	133.5	60	80	69.80	30.90	70	60.30	40.15	39.85	35.50	37.50	18.20	18.20		

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C	C <sub>0</sub>		M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>		
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.80	30 400	45 500	430	650	345	510		
30	12.0	17.0	M8	9.0	M3x5	80	7.0	1.20	40 000	57 800	690	1 000	495	715		
35	13.0	20.5	M8	9.0	M3x5	80	8.0	2.10	55 600	81 000	1 200	1 740	830	1 215		
45	18.0	23.5	M10	14.0	M4x7	105	10.0	4.10	90 400	128 500	2 440	3 470	1 700	2 425		

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8. Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## FNN – Flanged, normal, low profile

### R1693 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Not pre-lubricated

#### Further Ball Runner Blocks FNN

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Ordering example

Options:

- Ball Runner Block FNN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1693 813 10

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
20	R1693 8	9	1	4	3	10	11
25	R1693 2	9	1	4	3	10	11
e.g.	R1693 8		1		3	10	

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal


LS = low-friction seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

Ball Runner Blocks FNN

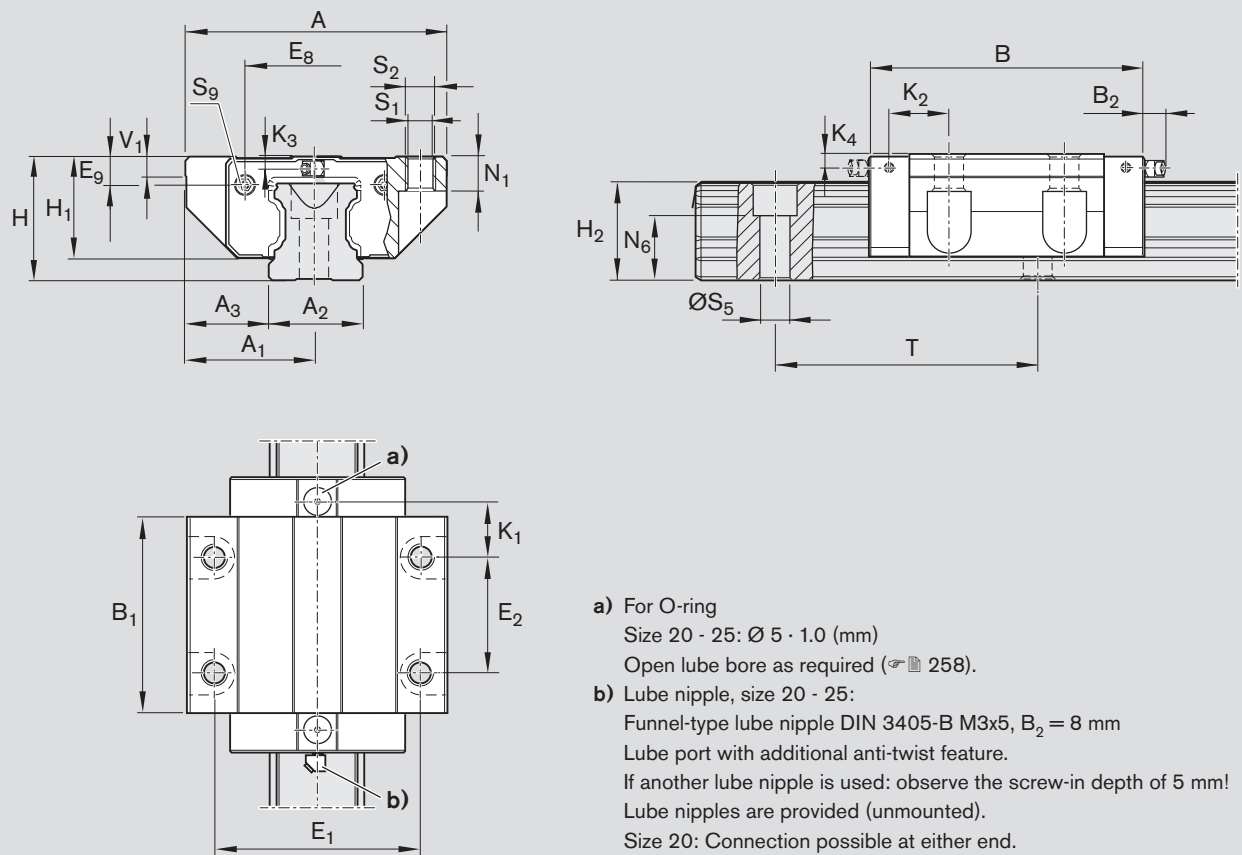

- a) For O-ring  
 Size 20 - 25:  $\varnothing 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 258).
- b) Lube nipple, size 20 - 25:  
 Funnel-type lube nipple DIN 3405-B M3x5,  $B_2 = 8$  mm  
 Lube port with additional anti-twist feature.  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipples are provided (unmounted).  
 Size 20: Connection possible at either end.  
 Size 25: Connection possible at all sides.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20	59	29.5	20	19.5	72.5	49.6	49	32	30.5	5.6	28	23.0	20.75	20.55	13.0	-	3.6	-
25	73	36.5	23	25.0	81.0	57.8	60	35	38.3	8.5	33	26.5	24.45	24.25	16.6	17.0	4.1	4.1

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>1</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.40	14 500	24 400	190	310	100	165	
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.60	22 800	30 400	320	430	180	240	

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

Standard Ball Runner Blocks made of steel

## FKN – Flanged, short, low profile

### R1663 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Not pre-lubricated

#### Further Ball Runner Blocks FKN

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Ordering example

Options:

- Ball Runner Block FKN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1663 813 10

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
20	R1663 8	9	1	4	3	10	11
25	R1663 2	9	1	4	3	10	11
e.g.	R1663 8		1		3	10	

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal

LS = low-friction seal




#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)



Ball Runner Blocks FKN

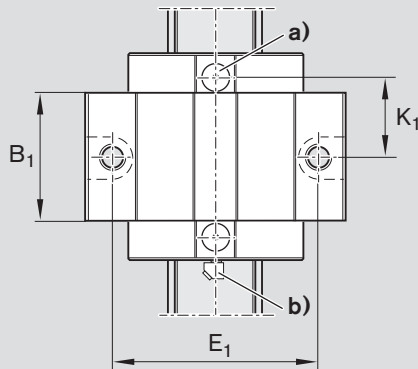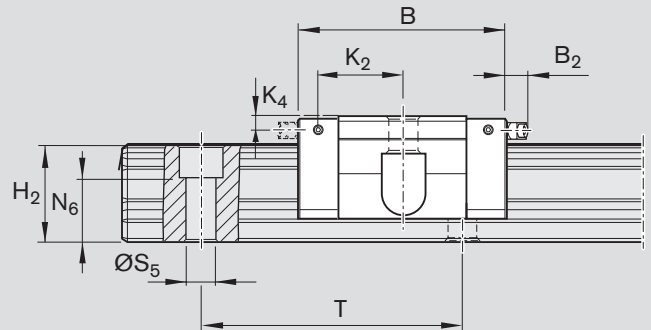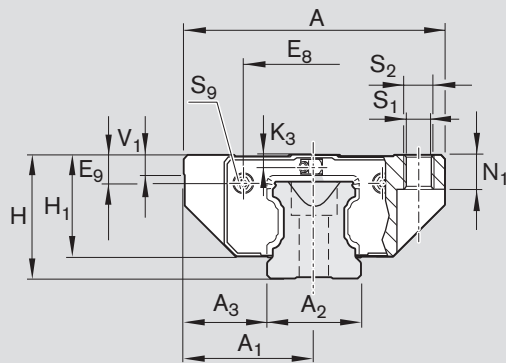

- a) For O-ring  
Size 20 - 25:  $\text{Ø } 5 \cdot 1.0$  (mm)  
Open lube bore as required ( $\varnothing \text{ } 258$ ).
- b) Lube nipple, size 20 - 25:  
Funnel-type lube nipple DIN 3405-B M3x5,  $B_2 = 8$  mm  
Lube port with additional anti-twist feature.  
If another lube nipple is used: observe the screw-in depth of 5 mm!  
Lube nipples are provided (unmounted).  
Size 20: Connection possible at either end.  
Size 25: Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20	59	29.5	20	19.5	55	31.9	49	30.5	5.6	28	23.0	20.75	20.55	20.1	-	3.6	-
25	73	36.5	23	25.0	62	38.6	60	38.3	8.5	33	26.5	24.45	24.25	24.5	25.0	4.1	4.1

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>1</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>		C	C <sub>0</sub>	M <sub>t</sub>	M <sub>10</sub>	M <sub>L</sub>	M <sub>L0</sub>
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.25	9 600	13 600	120	170	40	58
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.45	15 900	18 200	230	260	82	94

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SNN – Slimline, normal, low profile

### R1694 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication


- Not pre-lubricated

#### Further Ball Runner Blocks SNN

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

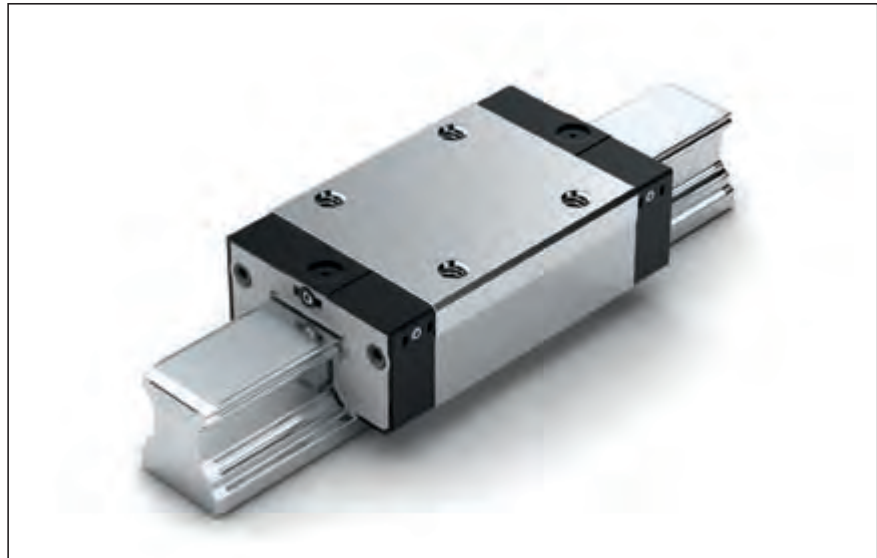

#### Ordering example

Options:

- Ball Runner Block SNN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal,  
without ball chain

Part number: R1694 813 10

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
20	R1694 8	9	1	4	3	10	11
25	R1694 2	9	1	4	3	10	11
e.g.	R1694 8		1		3	10	

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal


LS = low-friction seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

Ball Runner Blocks SNN

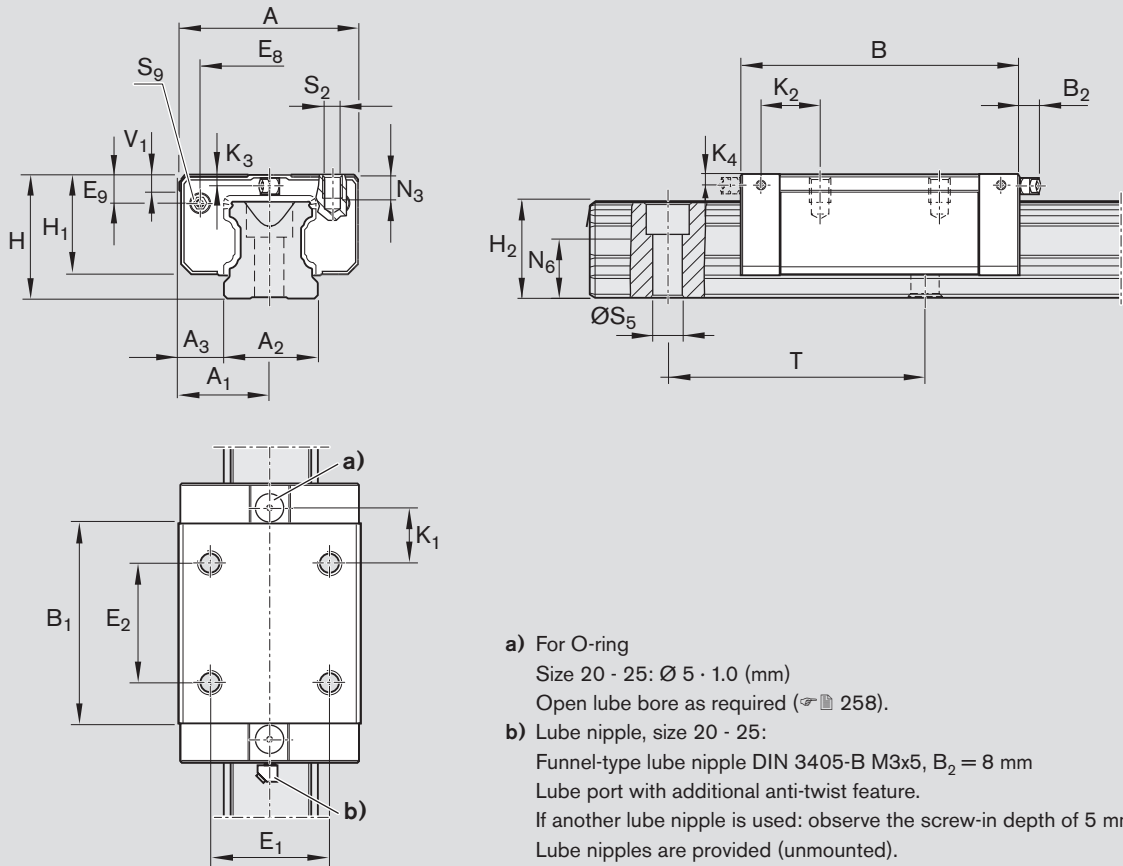

- a) For O-ring  
Size 20 - 25:  $\text{Ø } 5 \cdot 1.0$  (mm)  
Open lube bore as required ( $\varnothing \text{H } 258$ ).
- b) Lube nipple, size 20 - 25:  
Funnel-type lube nipple DIN 3405-B M3x5,  $B_2 = 8$  mm  
Lube port with additional anti-twist feature.  
If another lube nipple is used: observe the screw-in depth of 5 mm!  
Lube nipples are provided (unmounted).  
Size 20: Connection possible at either end.  
Size 25: Connection possible at all sides.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20	42	21	20	11.0	72.5	49.6	32	32	30.5	5.6	28	23.0	20.75	20.55	13.0	-	3.6	-
25	48	24	23	12.5	81.0	57.8	35	35	38.3	8.5	33	26.5	24.45	24.25	16.6	17.0	4.1	4.1

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>10</sub>	M <sub>L</sub>	M <sub>L0</sub>	
20	6.3	13.2	M5	6.0	M3x5	60	6.0	0.30	14 500	24 400	190	310	100	165	
25	7.0	15.2	M6	7.0	M3x5	60	7.5	0.45	22 800	30 400	320	430	180	240	

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

Standard Ball Runner Blocks made of steel

## SKN – Slimline, short, low profile

### R1664 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Not pre-lubricated

#### Further Ball Runner Blocks SKN

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Ordering example

Options:

- Ball Runner Block SKN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal,  
without ball chain

Part number: R1664 813 10

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
20	R1664 8	9	1	4	3	10	11
25	R1664 2	9	1	4	3	10	11
e.g.	R1664 8		1		3	10	

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal



LS = low-friction seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

Ball Runner Blocks SKN

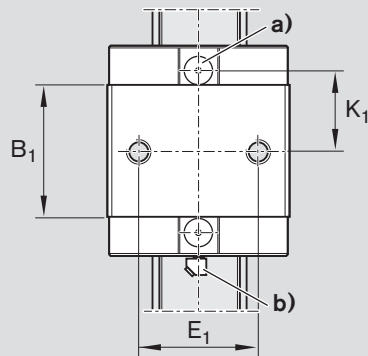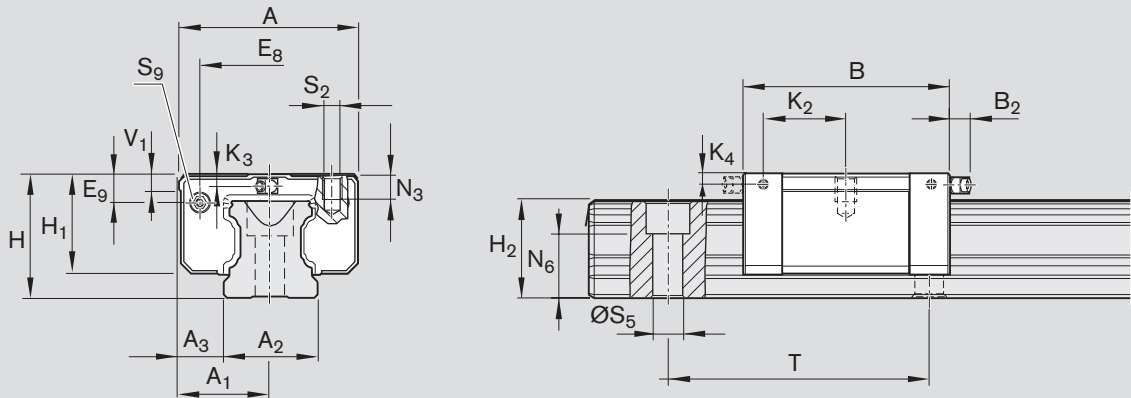

- a) For O-ring  
Size 20 - 25:  $\text{Ø } 5 \cdot 1.0$  (mm)  
Open lube bore as required ( $\varnothing \text{ } \text{H} 258$ ).
- b) Lube nipple, size 20 - 25:  
Funnel-type lube nipple DIN 3405-B M3x5,  $B_2 = 8$  mm  
Lube port with additional anti-twist feature.  
If another lube nipple is used: observe the screw-in depth of 5 mm!  
Lube nipples are provided (unmounted).  
Size 20: Connection possible at either end.  
Size 25: Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20	42	21	20	11.0	55	31.9	32	30.5	5.6	28	23.0	20.75	20.55	20.1	-	3.6	-
25	48	24	23	12.5	62	38.6	35	38.3	8.5	33	26.5	24.45	24.25	24.5	25.0	4.1	4.1

Size	Dimensions (mm)							Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>		C	C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>
20	6.3	13.2	M5	6.0	M3x5	60	6.0	0.20	9 600	13 600	120	170	40	58
25	7.0	15.2	M6	7.0	M3x5	60	7.5	0.30	15 900	18 200	230	260	82	94

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

Heavy Duty Ball Runner Blocks made of steel

## FNS – Flanged, normal, standard height

### R1651 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication


- Not pre-lubricated

#### Further Heavy Duty Runner Blocks FNS

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

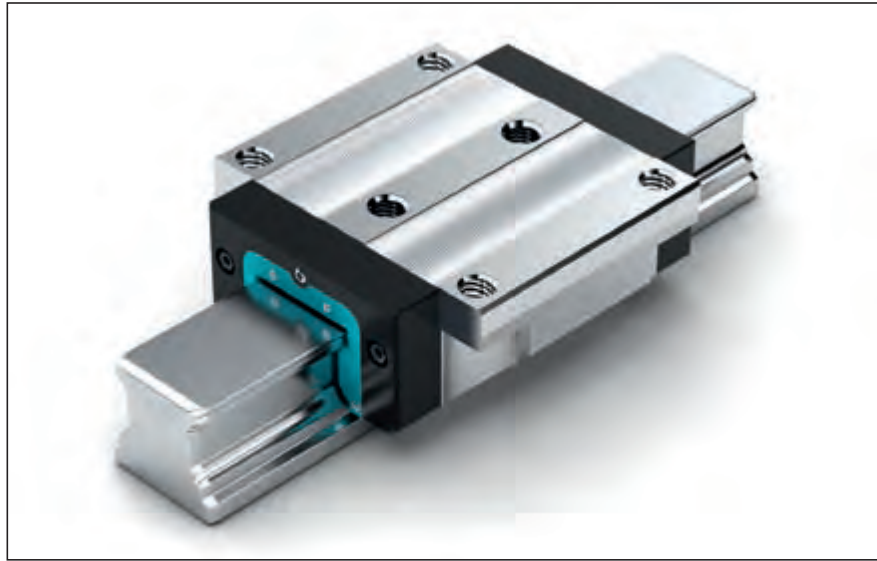

#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class					Seal for ball runner block without ball chain	
		C0	C1	C2	C3	N	H	P	SP	UP	SS	
55	R1651 5	9				4	3	–	–	–		10
			1			4	3	2	1	9		10
				2		–	3	2	1	9		10
					3	–	–	2	1	9		10
65	R1651 6	9				4	3	–	–	–		10
			1			4	3	2	1	9		10
				2		–	3	2	1	9		10
					3	–	–	2	1	9		10
e.g.	R1651 5		1				3					10

#### Ordering example

Options:

- Ball Runner Block FNS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1651 513 10


#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

SS = standard seal

**Ball Runner Blocks FNS**

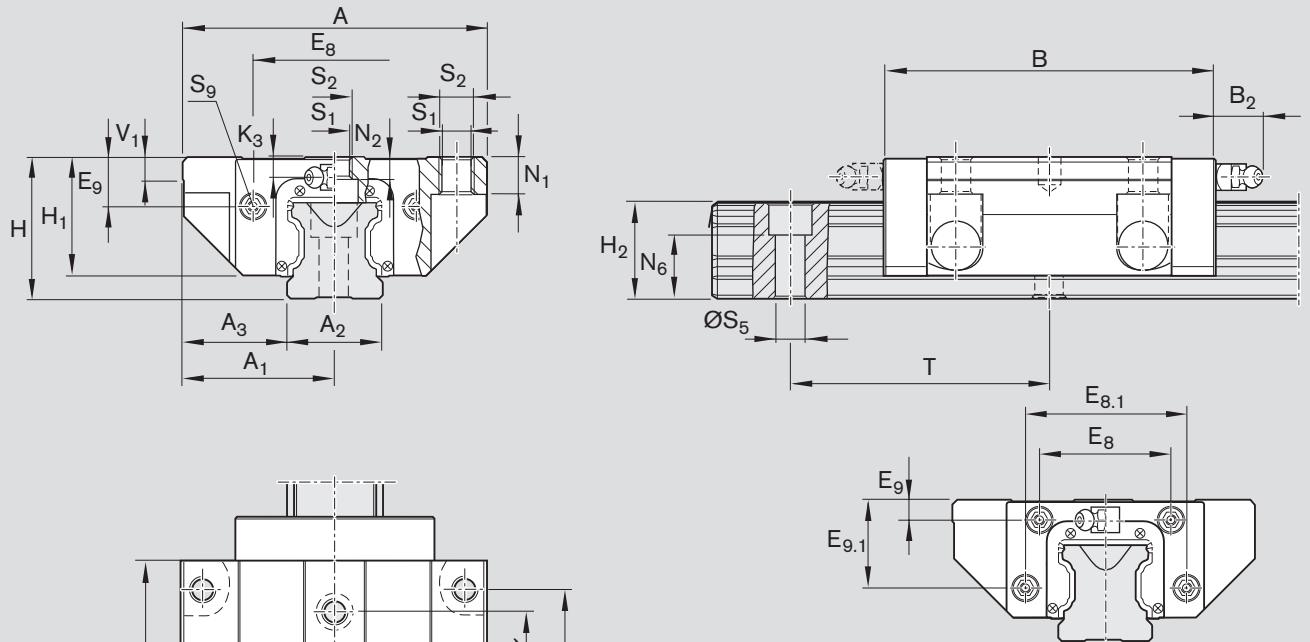

- a) Recommended position for pin holes (dimensions  $E_4$  235). Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- b) Lube nipple, size 55:  
Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 16$  mm  
Lube nipple, size 65:  
Hydraulic-type lube nipple DIN 71412-B M8x1x8,  $B_2 = 16$  mm  
If another lube nipple is used: observe the screw-in depth of 8 mm!  
Lube nipples are provided (unmounted). Connection possible at either end.
- c) For manufacturing reasons, there may be plugs at these positions. These must be removed before mounting.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	
55	140	70	53	43.5	159	115.5	116	95	70	80	-	22.3	-	70	57	48.15	47.85	
65	170	85	63	53.5	188	139.6	142	110	82	76	100	11.0	53.5	90	76	60.15	59.85	

Size	Dimensions (mm)												Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	K <sub>3</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C	C <sub>0</sub>		M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>		
55	9	18	13.5	29.0	12.4	M14	16	M5x8	120	12	5.20	98 200	121 400	3 100	3 860	1 540	1 905		
65	16	23	14.0	38.5	14.6	M16	18	M4x7	150	15	10.25	123 000	192 700	4 850	7 610	2 430	3 815		

1) Dimension  $H_2$  with cover strip  
 2) Dimension  $H_2$  without cover strip  
 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.



Heavy Duty Ball Runner Blocks made of steel

## FLS – Flanged, long, standard height

### R1653 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Not pre-lubricated

#### Further Heavy Duty Runner Blocks FLS

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class					Seal for ball runner block without ball chain	
		C0	C1	C2	C3	N	H	P	SP	UP	SS	
55	R1653 5	9	1	2	3	4	3	–	–	–	10	
						4	3	2	1	9	10	
						–	3	2	1	9	10	
						–	–	2	1	9	10	
65	R1653 6	9	1	2	3	4	3	–	–	–	10	
						4	3	2	1	9	10	
						–	3	2	1	9	10	
						–	–	2	1	9	10	
e.g.	R1653 5		1			3					10	

#### Ordering example

Options:

- Ball Runner Block FLS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1653 513 10


#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

SS = standard seal

Ball Runner Blocks FLS

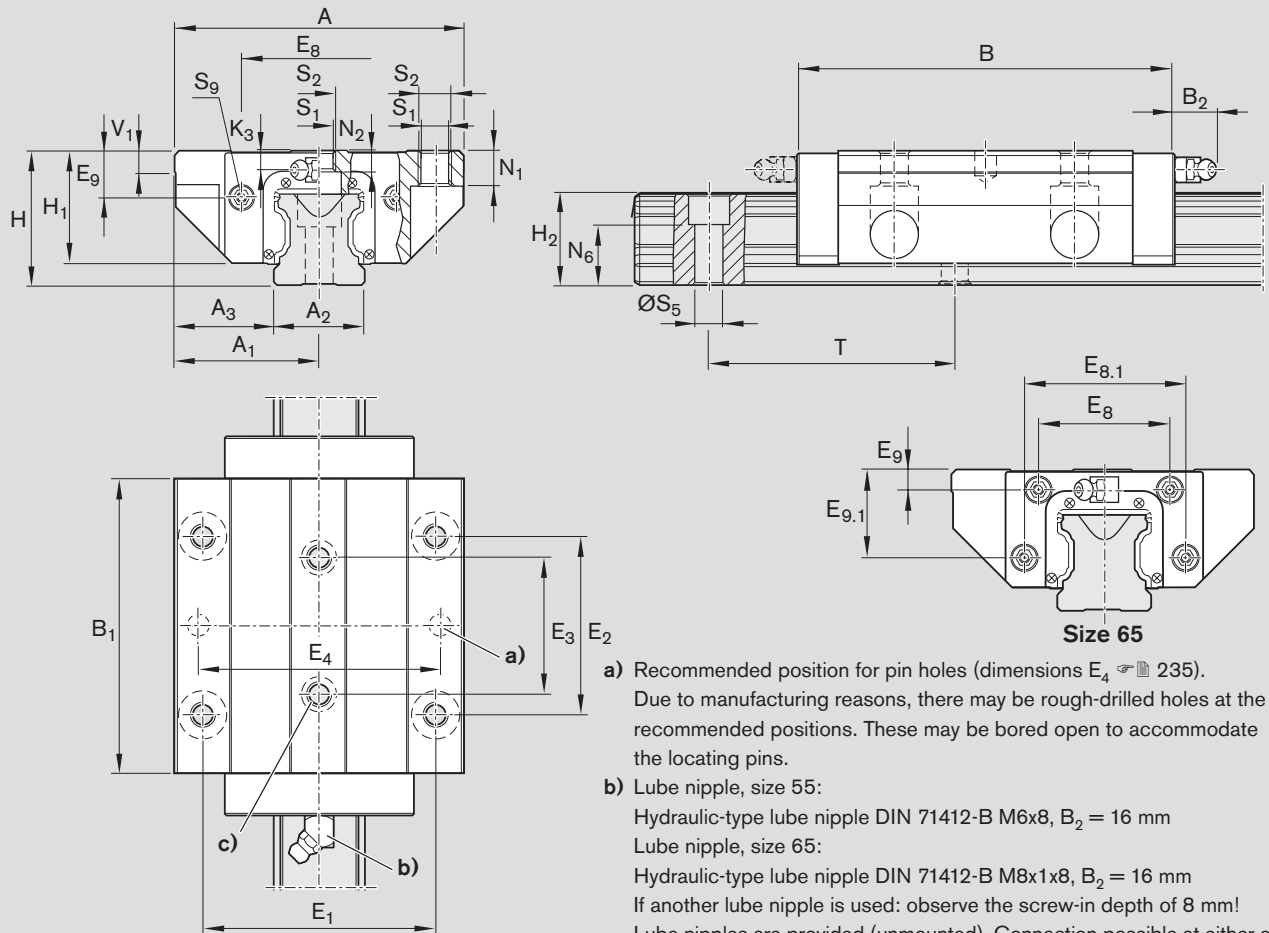

- a) Recommended position for pin holes (dimensions E<sub>4</sub> 235). Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- b) Lube nipple, size 55:  
Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 16 mm  
Lube nipple, size 65:  
Hydraulic-type lube nipple DIN 71412-B M8x1x8, B<sub>2</sub> = 16 mm  
If another lube nipple is used: observe the screw-in depth of 8 mm!  
Lube nipples are provided (unmounted). Connection possible at either end.
- c) For manufacturing reasons, there may be plugs at these positions. These must be removed before mounting.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>
55	140	70	53	43.5	200	155.5	116	95	70	80	-	22.3	-	70	57	48.15	47.85
65	170	85	63	53.5	243	194.6	142	110	82	76	100	11.0	53.5	90	76	60.15	59.85

Size	Dimensions (mm)											Weight (kg)	Load capacities <sup>3)</sup> (N)			Load moments <sup>3)</sup> (Nm)		
	K <sub>3</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>l0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
55	9	18	13.5	29.0	12.4	M14	16	M5x8	120	12	7.50	124 000	200 000	170 000	3 950	5 400	2 630	3 600
65	16	23	14.0	38.5	14.6	M16	18	M4x7	150	15	14.15	163 000	289 000	289 000	6 440	11 420	4 620	8 190

1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip  
 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Heavy Duty Ball Runner Blocks made of steel

## SNS – Slimline, normal, standard height

### R1622 ...1.

#### Dynamic characteristics

Travel speed:  $v_{max} = 3 \text{ m/s}$


Acceleration:  $a_{max} = 250 \text{ m/s}^2$

(If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication


- Not pre-lubricated

#### Further Heavy Duty Runner Blocks SNS

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

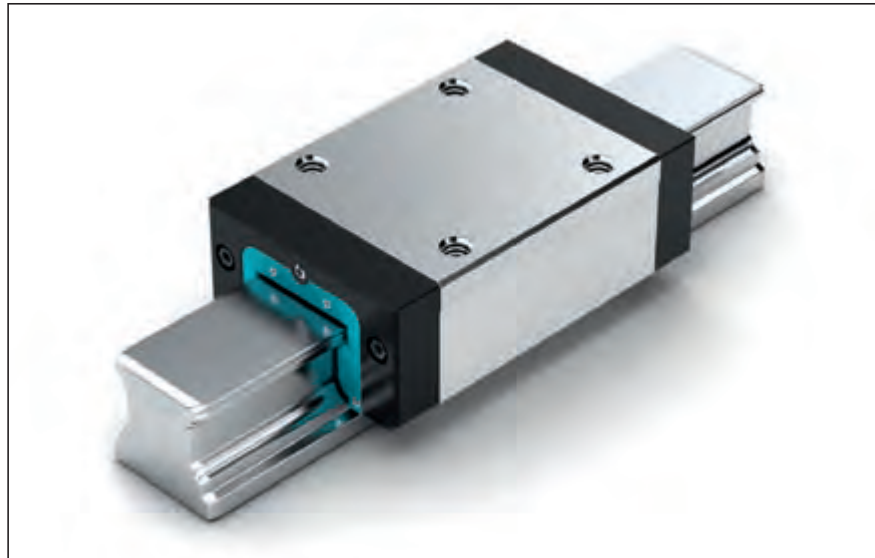

#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class			Seal for ball runner block without ball chain	
		C0	C1	C2	C3	N	H	P	SS	
55	R1622 5	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
65	R1622 6	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
e.g.	R1622 5		1				3		10	

#### Ordering example

Options:

- Ball Runner Block SNS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1622 513 10





#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

SS = standard seal

**Ball Runner Blocks SNS**

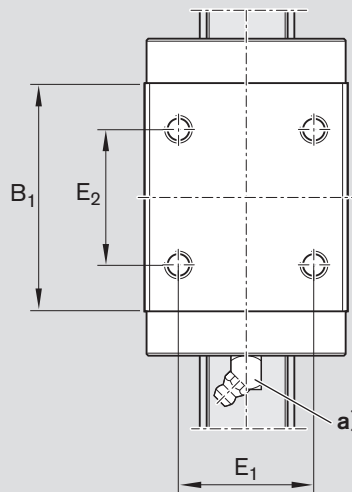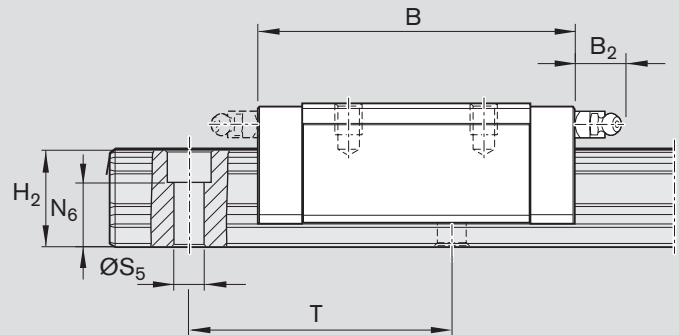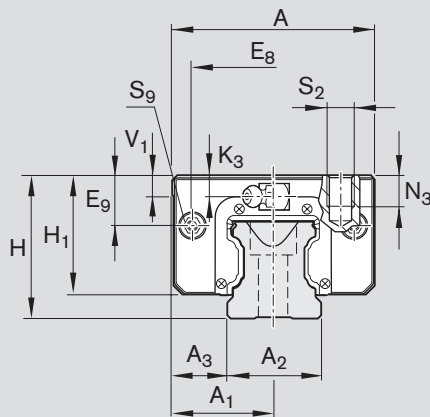

- a) Lube nipple, size 55:  
Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 16 mm
- Lube nipple, size 65:  
Hydraulic-type lube nipple DIN 71412-B M8x1x8, B<sub>2</sub> = 16 mm
- If another lube nipple is used: observe the screw-in depth of 8 mm!
- Lube nipples are provided (unmounted).
- Connection possible at either end.

Size	Dimensions (mm)															
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>
55	100	50	53	23.5	159	115.5	75	75	80	-	22.3	-	70	57	48.15	47.85
65	126	63	63	31.5	188	139.6	76	70	76	100	11.0	53.5	90	76	60.15	59.85

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	K <sub>3</sub>	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
55	9	19	29.0	M12	16	M5x8	120	12	3.80	98 200	121 400	3 100	3 860	1 540	1 905	
65	16	21	38.5	M16	18	M4x7	150	15	6.90	123 000	192 700	4 850	7 610	2 430	3 815	

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Heavy Duty Ball Runner Blocks made of steel

## SLS – Slimline, long, standard height

### R1623 ...1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Not pre-lubricated

#### Further Heavy Duty Runner Blocks SLS

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class			Seal for ball runner block without ball chain	
		C0	C1	C2	C3	N	H	P	SS	
55	R1623 5	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
65	R1623 6	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
e.g.	R1623 5		1				3			10

#### Ordering example

Options:

- Ball Runner Block SLS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1623 513 10


#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

- SS = standard seal

**Ball Runner Blocks SLS**

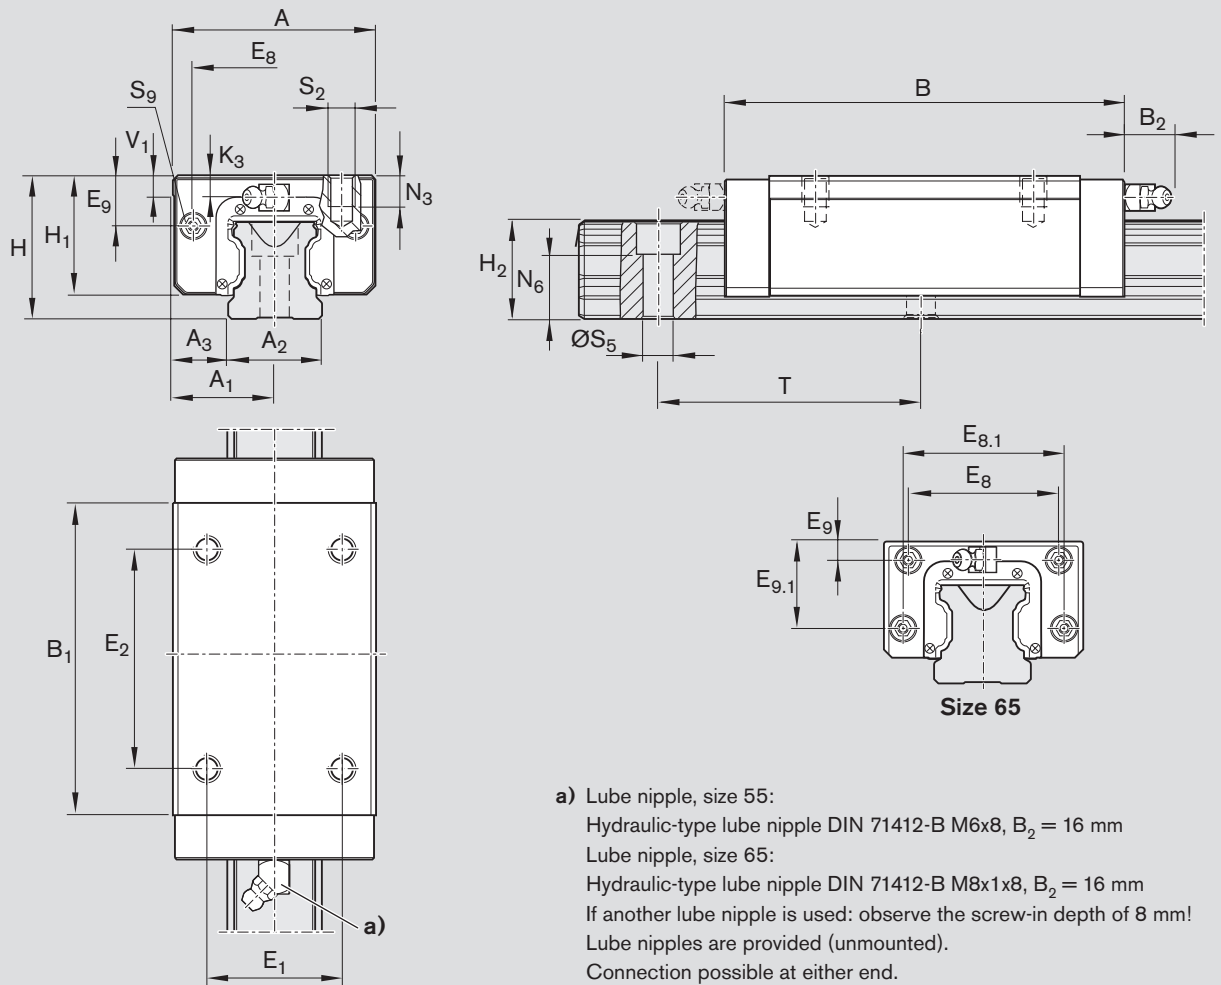

- a) Lube nipple, size 55:  
Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 16 mm
- Lube nipple, size 65:  
Hydraulic-type lube nipple DIN 71412-B M8x1x8, B<sub>2</sub> = 16 mm
- If another lube nipple is used: observe the screw-in depth of 8 mm!
- Lube nipples are provided (unmounted).
- Connection possible at either end.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	
55	100	50	53	23.5	200	155.5	75	95	80	-	22.3	-	70	57	48.15	47.85	
65	126	63	63	31.5	243	194.6	76	120	76	100	11.0	53.5	90	76	60.15	59.85	

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	K <sub>3</sub>	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
55	9	19	29.0	M12	16	M5x8	120	12	4.8	124 200	170 000	3 950	5 400	2 630	3 600	
65	16	21	38.5	M16	18	M4x7	150	15	9.8	163 000	289 000	6 440	11 420	4 620	8 190	

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load capacities and moments for Ball Runner Block **without** ball chain.  
Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

Heavy Duty Ball Runner Blocks made of steel

## SNH – Slimline, normal, high

### R1621 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication


- Not pre-lubricated

#### Further Heavy Duty Runner Blocks SNH

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

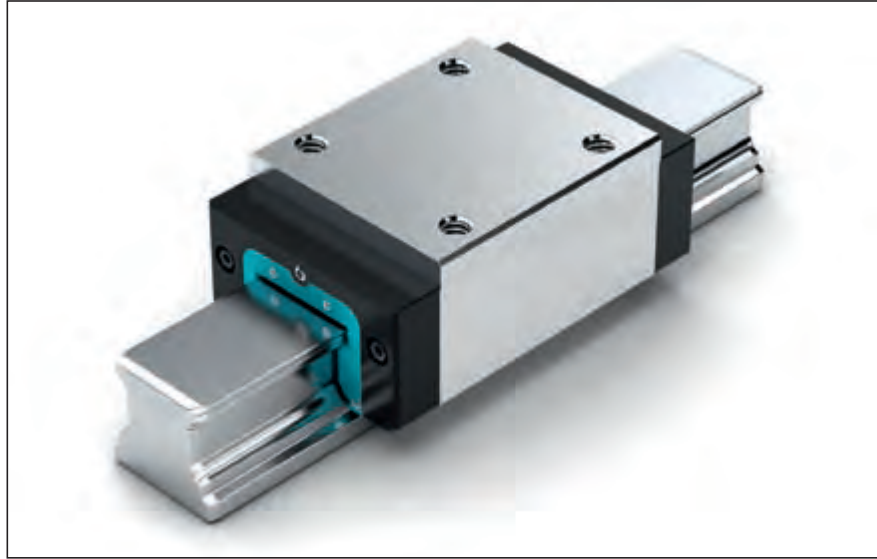

#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class			Seal for ball runner block without ball chain	SS
		C0	C1	C2	C3	N	H	P		
55	R1621 5	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
e.g.	R1621 5		1				3		10	

#### Ordering example

Options:

- Ball Runner Block SNH
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1621 513 10

#### Preload classes


- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

SS = standard seal



Ball Runner Blocks SNH

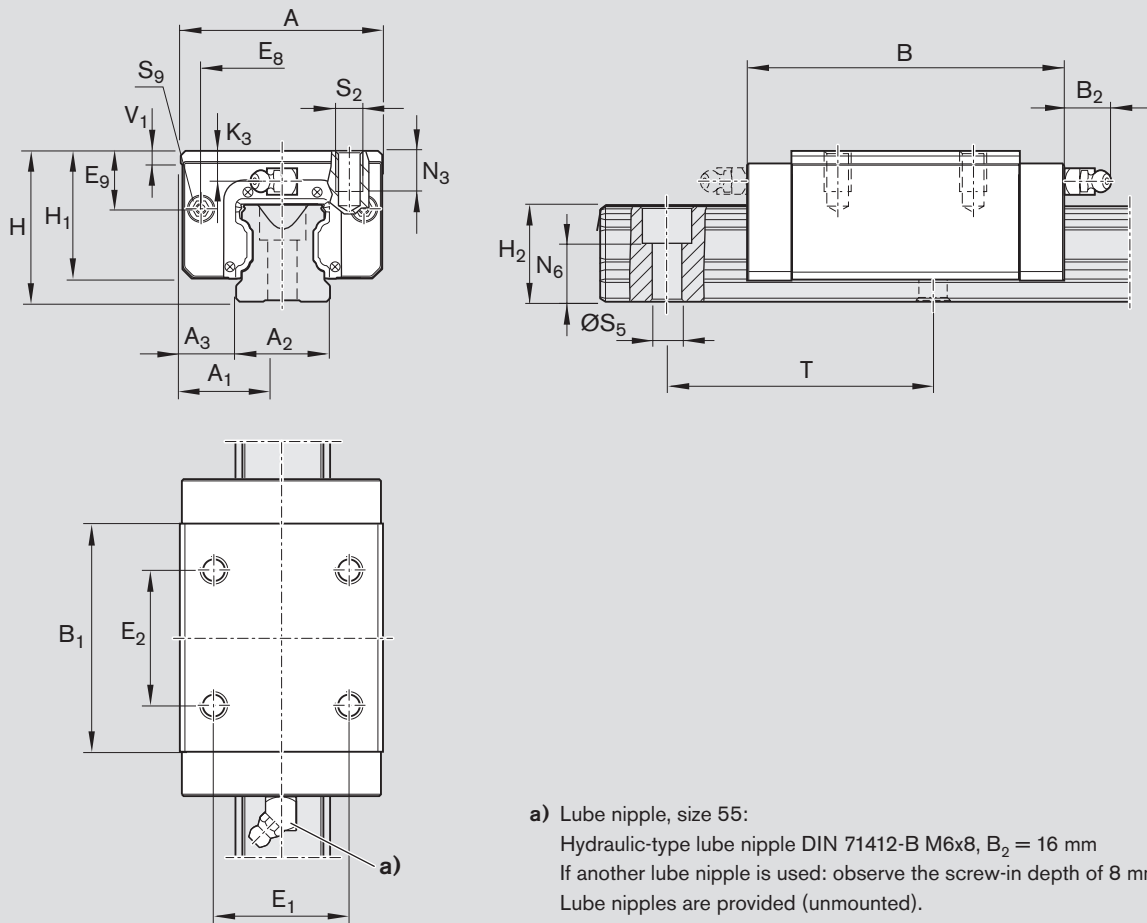

a) Lube nipple, size 55:  
 Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 16 mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at either end.

Size	Dimensions (mm)													
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>
55	100	50	53	23.5	159	115.5	75	75	80	32.3	80	67	48.15	47.85

Size	Dimensions (mm)									Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	K <sub>3</sub>	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
55	19	19	29	M12	16	M5x8	120	12	4.70	98 200	121 400	3 100	3 860	1 540	1 905	

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

Heavy Duty Ball Runner Blocks made of steel

## SLH – Slimline, long, high

### R1624 ... 1.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 3 \text{ m/s}$


Acceleration:  $a_{\max} = 250 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication


- Not pre-lubricated

#### Further Heavy Duty Runner Blocks SLH

- Corrosion-resistant Ball Runner Blocks
- Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.

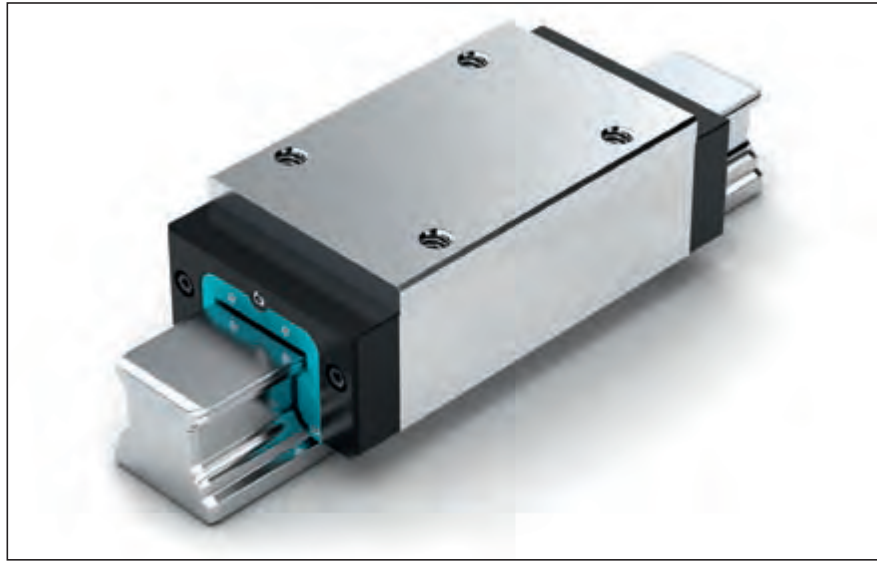

#### Options and part numbers

Size	Ball runner block with size	Preload class				Accuracy class			Seal for ball runner block without ball chain	
		C0	C1	C2	C3	N	H	P	SS	
55	R1624 5	9				4	3	–		10
			1			4	3	2		10
				2		–	3	2		10
					3	–	–	2		10
e.g.	R1624 5		1				3			10

#### Ordering example

Options:

- Ball Runner Block SLH
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1624 513 10


#### Preload classes

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C
- C3 = preload 13% C

#### Seals

SS = standard seal

Ball Runner Blocks SLH

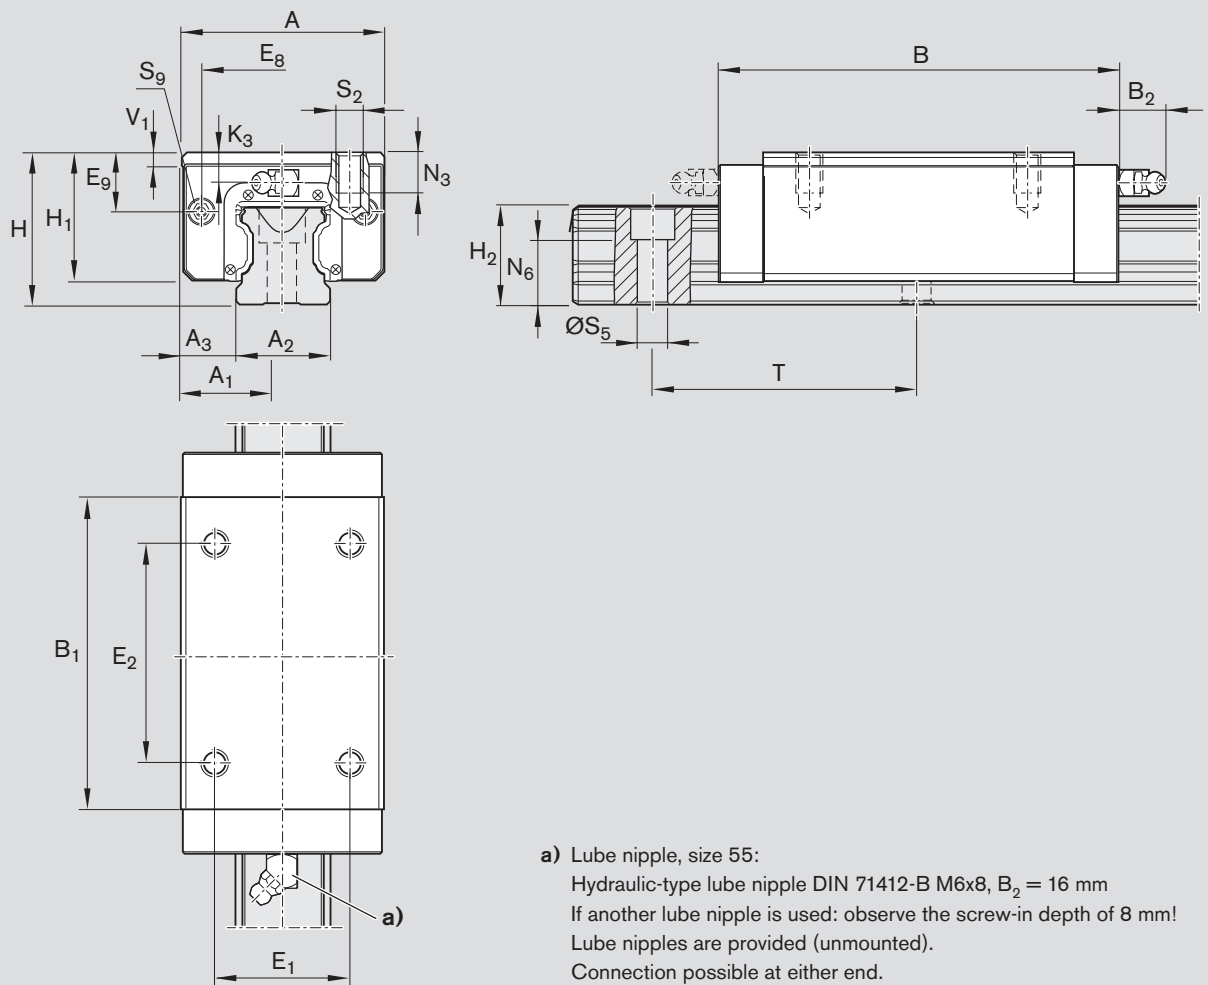

a) Lube nipple, size 55:  
 Hydraulic-type lube nipple DIN 71412-B M6x8, B<sub>2</sub> = 16 mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at either end.

Size	Dimensions (mm)													
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>
55	100	50	53	23.5	200	155.5	75	95	80	32.3	80	67	48.15	47.85

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)		Load moments <sup>3)</sup> (Nm)			
	K <sub>3</sub>	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>		C	C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>
55	19	19	29	M12	16	M5x8	120	12	6.00	124 200	170 000	3 950	5 400	2 630	3 600

- 1) Dimension H<sub>2</sub> with cover strip
  - 2) Dimension H<sub>2</sub> without cover strip
  - 3) Load capacities and moments for Ball Runner Block **without** ball chain.
- Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

High Precision Ball Runner Blocks made of steel


## Product Description

### Highlights versus existing precision range


- Travel accuracy again further improved by a factor of up to six
- Significantly reduced frictional drag variations and low frictional drag, especially under an applied external load
- Highest precision
- Superior quality
- Extremely low impact on surrounding environment due to minimal oil preservation
- Patented entry zone design enhances travel accuracy
- Plus all further advantages of Rexroth Precision Ball Runner Blocks


### High precision through innovation:

- New entry zone geometry for ball runner blocks:  
The load-dependent entry zone (1) from Rexroth.

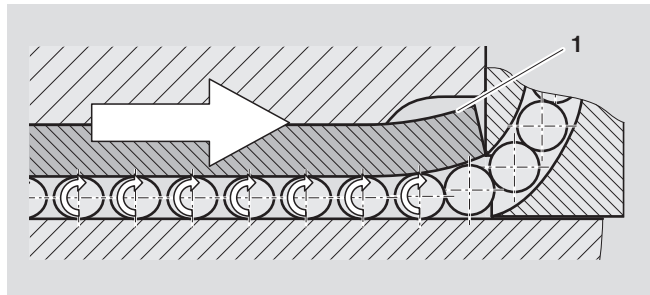


### Application example

Further application examples  83

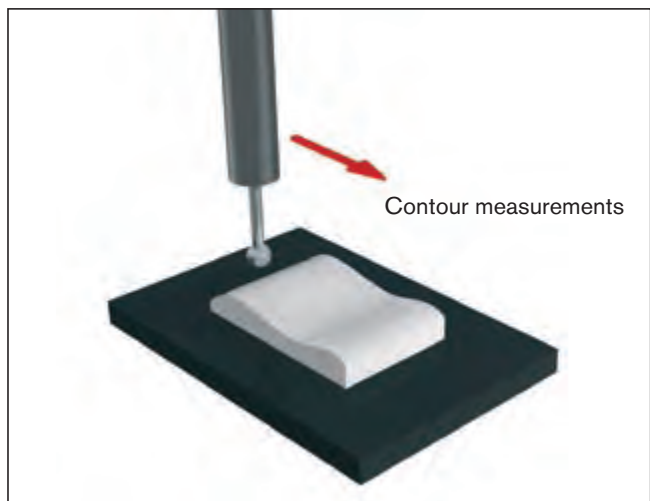

3D coordinate measuring machine

Overview of High Precision Steel Ball Runner Block models

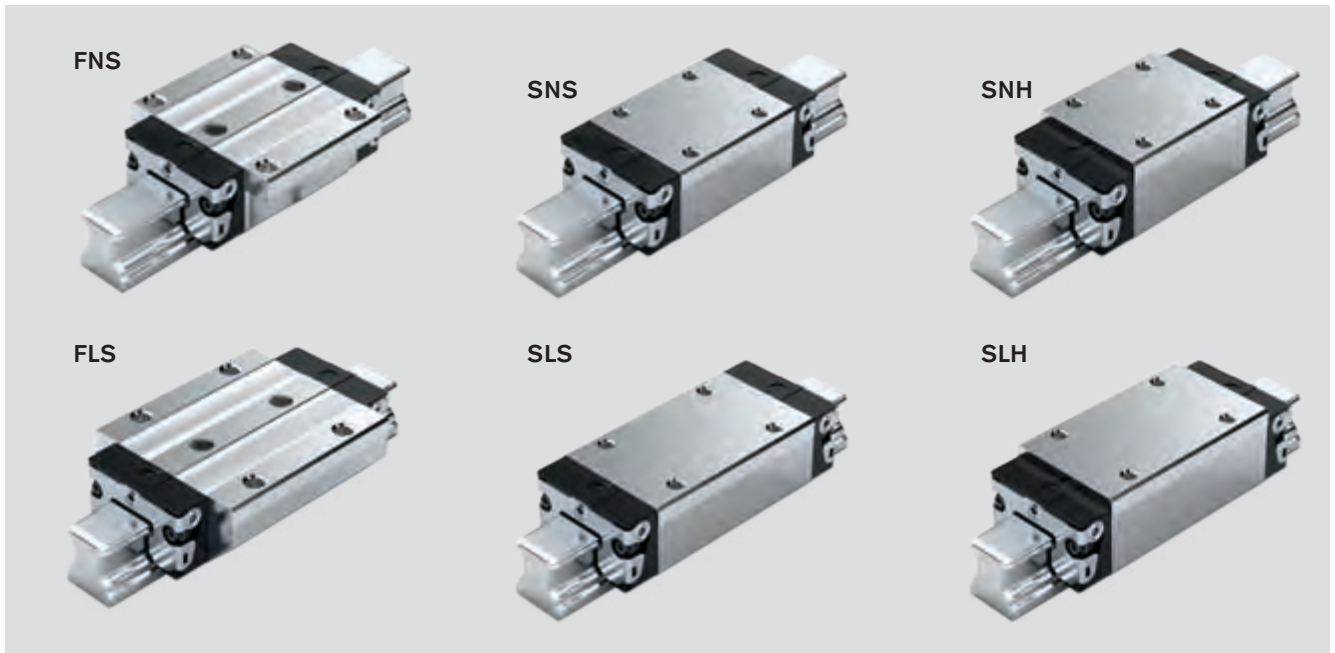

**Ball chain (optional)**  
 – Optimizes noise levels

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged	F	N	S
	Slimline			
	Wide			
	Compact			
<b>Length</b>	Normal	N	S	
	Long			
	Short			
<b>Height</b>	Standard height	S	S	
	High			
	Low			


High Precision Ball Runner Blocks made of steel

## Comparison

### Conventional Ball Runner Blocks

#### Entry zone geometry for conventional ball runner blocks

If the ball runner block has a conventional entry zone, this can only be designed for a specific load point.

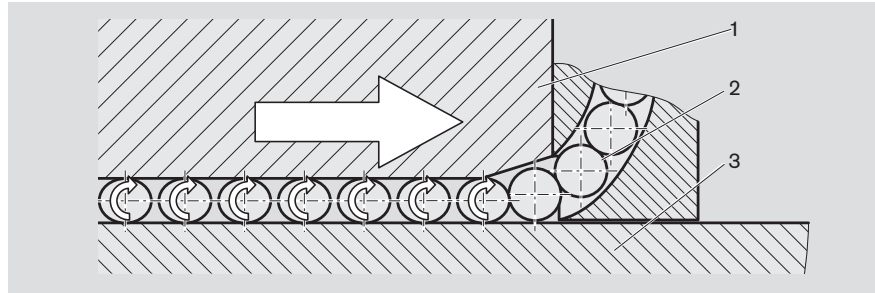

- 1 Ball runner block
- 2 Ball
- 3 Ball guide rail

#### Ball entry

- The balls are guided to the beginning of the entry zone by the ball recirculation track.
- When the distance between the ball runner block (1) and the ball guide rail (3) becomes smaller than the ball diameter, the ball (2) is subjected to loading (preload) in a series of pulses.
- The preload increases in the entry zone and reaches a maximum in the load-bearing zone. The ball transmits the force from the runner block to the rail.
- The kinematic and geometric conditions cause spaces to develop between the balls.

#### Entry zone


Conventional runner blocks have a fixed entry zone. The depth of the entry zone must be designed to withstand high loading, since smooth ball entry must be assured even under very high loads.

- On the one hand, there should be as many load-bearing balls as possible at any one time in the runner block to ensure optimal load capacity of the linear bearing.
    - ➡ shortest possible entry zone
  - On the other hand, the increase in loading of the balls upon entry should be as slow and smooth as possible, in order to maximize the geometrical travel accuracy.
    - ➡ shallowest (longest) possible entry zone
- These are conflicting aims (short versus long entry zone).

## High Precision Ball Runner Blocks

### New entry zone geometry for high precision ball runner blocks

High precision ball runner blocks have an innovative entry zone. The ends of the steel segments are not supported by the runner block body and can therefore deflect elastically. This entry zone adjusts individually to the actual operating load of the ball runner block. The balls enter the load-bearing zone very smoothly, i.e. without any load pulsation.

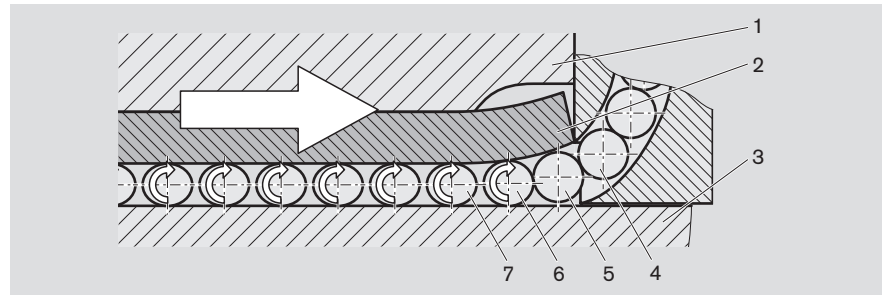

1 Ball runner block  
2 Steel segment

3 Ball guide rail  
4–7 Balls

### Ball entry

- The balls (4) are guided to the beginning of the entry zone by the ball recirculation track.
- The ball (5) enters the zone load-free.
- The ball (6) causes the end of the steel segment to deflect elastically. This deflection is the sum of the compliance of the ball itself and the compliance of the unsupported end of the steel segment.
- As the distance between the steel segment and the rail becomes smaller than the ball diameter, the ball is gradually and uniformly subjected to loading (preload).
- The preload is thus smoothly increased until the ball (7) has reached its maximum preload.

### Innovative solution from Rexroth: ➡ the load-dependent entry zone

The functionality of the entry zone is key. The steel segments are manufactured with such precision that they deflect to the right degree in response to the actual load. This results in especially smooth ball entry behavior.

A ball deflects the precision-manufactured steel segment only as far as necessary to allow the following ball to enter load-free. The ball is no longer guided into the load-bearing zone in pulses by a rigid entry channel but by a very smooth flexing curve, which ideally transitions tangentially into the load-bearing zone.

The extremely smooth ball entry behavior and the continuous adjustment of the entry zone in response to the actual load are the great advantages of these high precision ball runner blocks.

### Characteristic features

- 1 Highest travel accuracy
- 2 Minimal frictional drag variation
- 3 The conflicting aims are resolved



High Precision Ball Runner Blocks made of steel

## Frictional Drag Variations

### Definition

The total frictional drag of a runner block is composed of the following components:


- 1 Ball friction
- 2 Seal friction
- 3 Friction in the ball recirculation elements and recirculation tracks

Variations in frictional drag can be especially troublesome in certain operating environments.

### These variations are mainly due to the following fact:

The balls have to transition from the load-free zone to the load-bearing zone. Through its innovative design, the smooth ball entry zone minimizes the variations, which also permits better control of the linear drive.

Frictional drag comparison for a size 35 ball runner block with an external load of 10,000 N

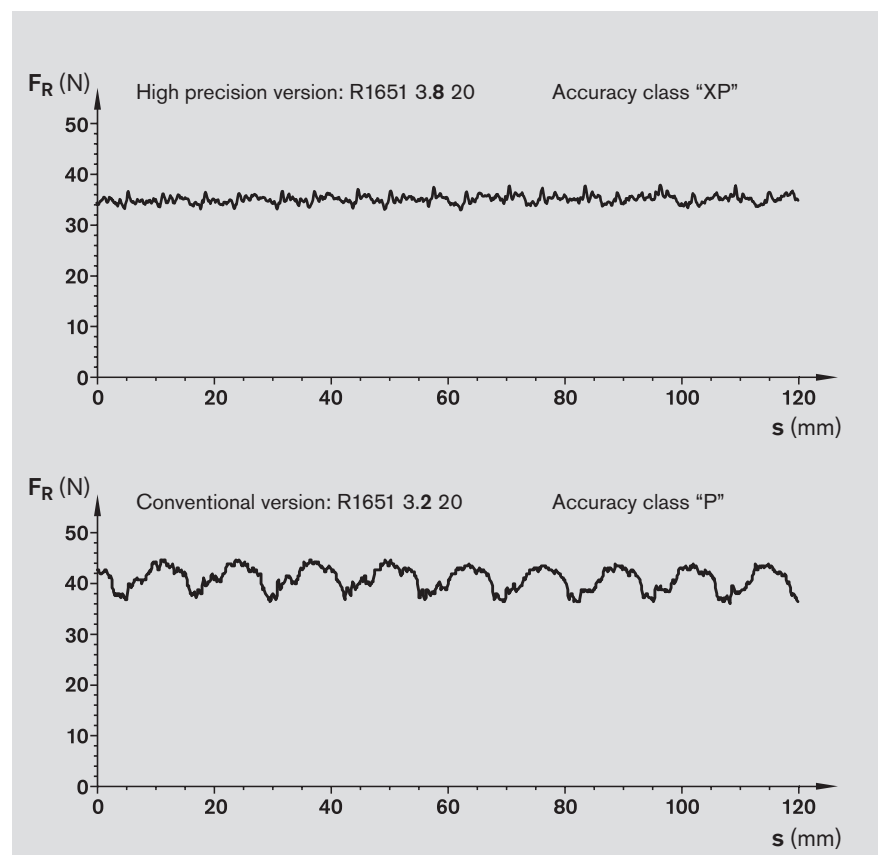

- ➡ Reduced frictional drag
- ➡ Significantly reduced frictional drag variation


# Travel accuracy

## Definition

Ideally, the ball runner block should move in a straight line along the guide rail in the direction of the X-axis. In practice, however, deviations occur in all six degrees of freedom. Travel accuracy is the term used to describe the closeness of the movement to the ideal straight line.

### The six different degrees of freedom

- 1 Vertical deviation  
(linear deviation in the Z-direction)
- 2 Yawing (rotation about the Z-axis)
- 3 Lateral deviation  
(linear deviation in the Y direction)
- 4 Pitching (rotation about the Y-axis)
- 5 Translation  
(linear motion in the X-direction)
- 6 Rolling (rotation about the X-axis)

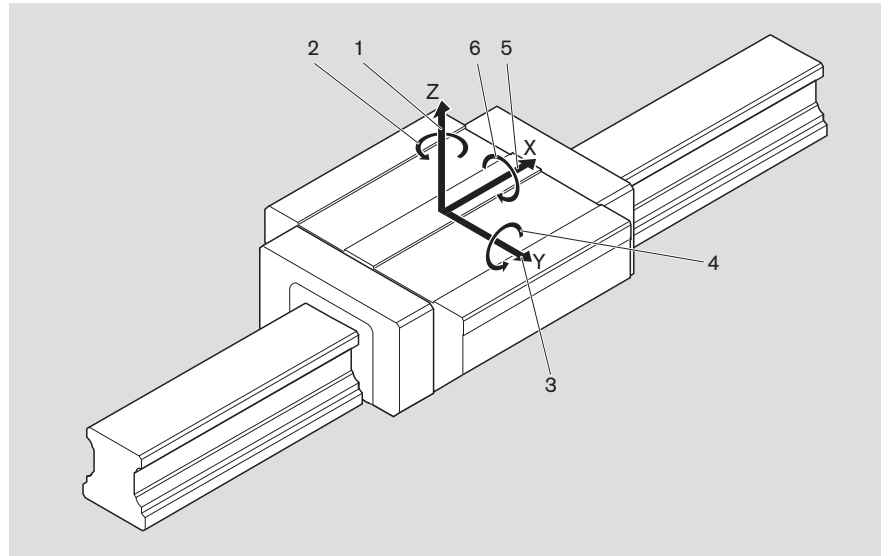

### Causes of travel inaccuracy

Travel accuracy is influenced by the following parameters:

- 1 The finish of the mounting base to which the rail fastened.
- 2 Parallelism errors between the contact surfaces of the rail and the ball running tracks.
- 3 Elastic deformations of the rail under the mounting screws.
- 4 Variations in accuracy as balls enter and exit the load-bearing zone.

### Optimization potential

- Re 1 Machine the mounting base for the guide rail with the greatest possible precision (beyond the control of Rexroth).
- Re 2 The deviation can be influenced by choosing an appropriate accuracy class for the rail.
- Re 3 Reduce the tightening torque. The tightening torque for the fastening screws has a proportional effect. Reducing the torque will lessen the compression of the rail material.  
 ─► Reduced geometric variation in travel characteristics



**CAUTION: This may result in a decrease in the transmittable forces and moments.**

- Re 4 – The patented, innovative entry zone design of the Rexroth high precision ball runner blocks minimizes these accuracy deviations.

Potential further improvements:

- Use of long runner blocks
- Installation of additional runner blocks per rail

High Precision Ball Runner Blocks made of steel

## Travel accuracy


The deviations measured are due to the following phenomenon

A ball circuit contains a number  $n$  of load-bearing balls. When the ball runner block is moved in the direction of travel, a new ball engages in the entry zone. Now there are  $n+1$  load-bearing balls. This creates an imbalance between the four rows of load-bearing balls. Because the balls enter the load-bearing zones randomly, the runner block begins to rotate in an attempt to restore the balance. As the runner block moves further on, a ball leaves the load-bearing part of the circuit through the run-out zone. This again creates an imbalance between the four load-bearing ball circuits, which the runner block again attempts to correct by rotating. This effect is clearly shown in the diagram at right.

As demonstrated in practical applications, the shortwave inaccuracies have a period equivalent to approximately twice the ball diameter.


The remaining long-wave deviation is the result of the causes 1, 2 and 3 described earlier (mounting base finish, parallelism error, and elastic deformation of the rail under the fastening screws).

Distribution of forces in the runner block

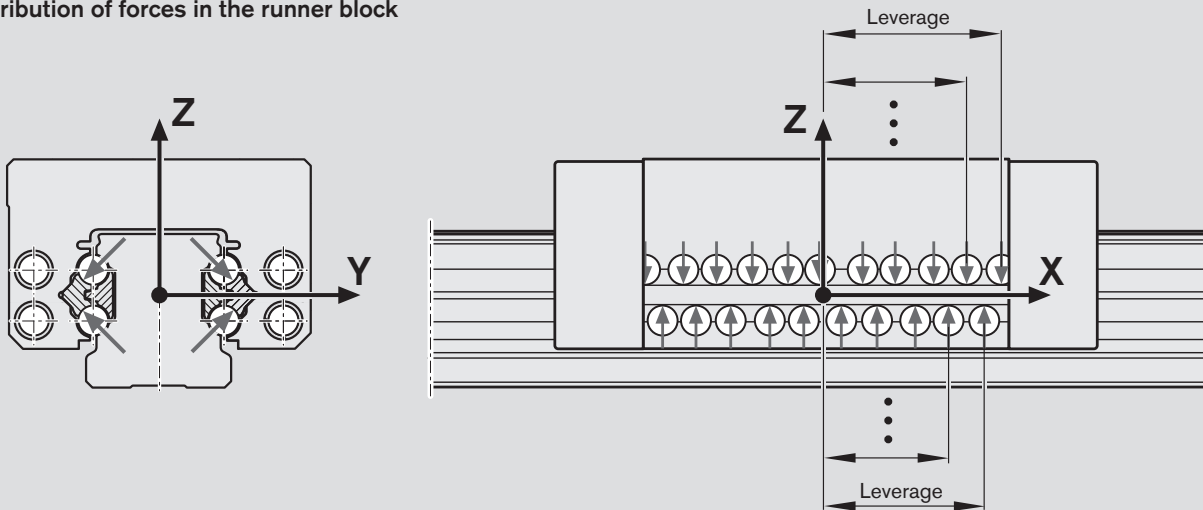

### Direct comparison of the travel accuracy of two ball runner blocks

The graph clearly shows that the short-wave inaccuracies (dashed line) can be very significantly reduced by the new, innovative design of the entry zone (continuous line).

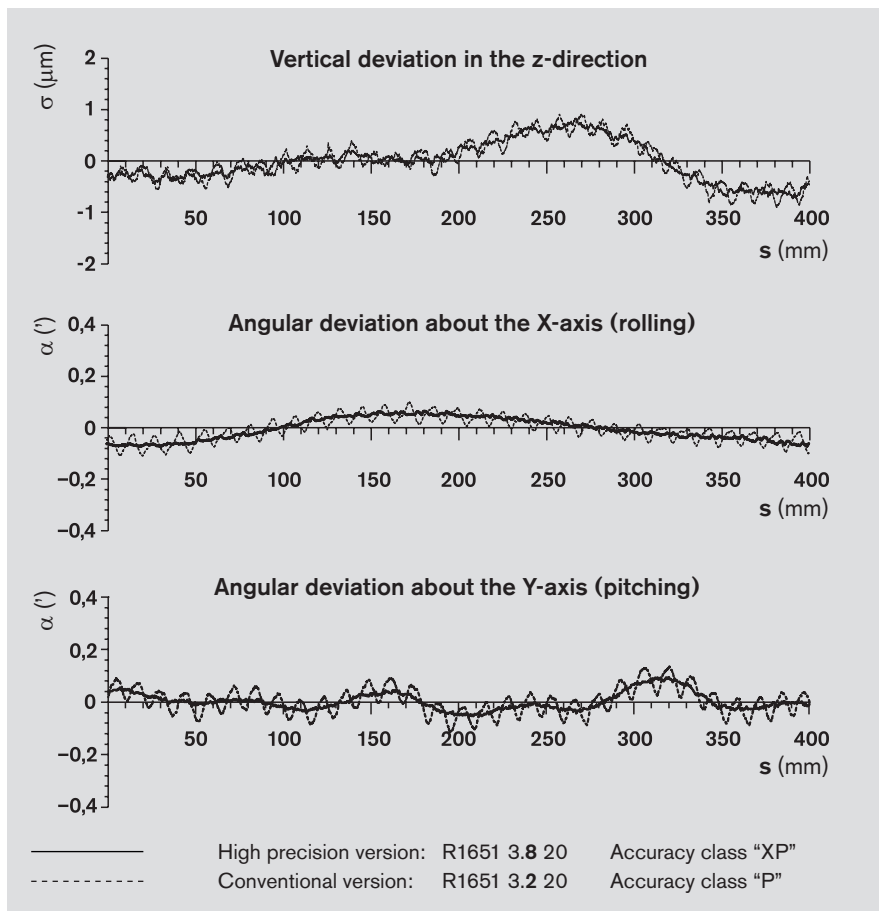

High Precision Ball Runner Blocks made of steel

## FNS, FLS

### FNS – Flanged, normal, standard height

R1651 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 37.

#### Ordering example

Options:

- Ball Runner Block FNS
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1651 718 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C1	C2	C3	XP	SP	UP	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1651 1	1	2	3	8	1	9	20	21	–	22	23	–
20	R1651 8	1	2	3	8	1	9	20	21	2Z	22	23	2Y
25	R1651 2	1	2	3	8	1	9	20	21	2Z	22	23	2Y
30	R1651 7	1	2	3	8	1	9	20	21	2Z	22	23	2Y
35	R1651 3	1	2	3	8	1	9	20	21	2Z	22	23	2Y
45	R1651 4	1	2	3	8	1	9	20	–	2Z	22	–	2Y
e.g.	R1651 7	1			8			20					

### FLS – Flanged, long, standard height

R1653 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 39.

#### Ordering example

Options:

- Ball Runner Block FLS
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1653 718 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C1	C2	C3	XP	SP	UP	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1653 1	1	2	3	8	1	9	20	21	–	22	23	–
20	R1653 8	1	2	3	8	1	9	20	21	2Z	22	23	2Y
25	R1653 2	1	2	3	8	1	9	20	21	2Z	22	23	2Y
30	R1653 7	1	2	3	8	1	9	20	21	2Z	22	23	2Y
35	R1653 3	1	2	3	8	1	9	20	21	2Z	22	23	2Y
45	R1653 4	1	2	3	8	1	9	20	–	2Z	22	–	2Y
e.g.	R1653 7	1			8			20					

1) Low-friction seal available for preload C1 (only for accuracy class XP)

#### Preload classes

C1 = preload 2% C

C2 = preload 8% C

C3 = preload 13% C

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

## SNS, SLS

### SNS – Slimline, normal, standard height R1622 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 43.

#### Ordering example

Options:

- Ball Runner Block SNS
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1622 718 20

### SLS – Slimline, long, standard height R1623 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 45.

#### Ordering example

Options:

- Ball Runner Block SLS
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1623 718 20

#### Preload classes

C1 = preload 2% C

C2 = preload 8% C

C3 = preload 13% C



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class	Seal for ball runner block						
		C1	C2	C3		without ball chain	with ball chain			DS		
					XP	SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS	
15	R1622 1	1	2	3		8	20	21	–	22	23	–
20	R1622 8	1	2	3		8	20	21	2Z	22	23	2Y
25	R1622 2	1	2	3		8	20	21	2Z	22	23	2Y
30	R1622 7	1	2	3		8	20	21	2Z	22	23	2Y
35	R1622 3	1	2	3		8	20	21	2Z	22	23	2Y
45	R1622 4	1	2	3		8	20	–	2Z	22	–	2Y
e.g.	R1622 7	1				8	20					



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class	Seal for ball runner block						
		C1	C2	C3		without ball chain	with ball chain			DS		
					XP	SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS	
15	R1623 1	1	2	3		8	20	21	–	22	23	–
20	R1623 8	1	2	3		8	20	21	2Z	22	23	2Y
25	R1623 2	1	2	3		8	20	21	2Z	22	23	2Y
30	R1623 7	1	2	3		8	20	21	2Z	22	23	2Y
35	R1623 3	1	2	3		8	20	21	2Z	22	23	2Y
45	R1623 4	1	2	3		8	20	–	2Z	22	–	2Y
e.g.	R1623 7	1				8	20					

1) Low-friction seal available for preload C1

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

High Precision Ball Runner Blocks made of steel

## SNH, SLH

### SNH – Slimline, normal, high R1621 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}} : a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 49.

#### Ordering example

Options:

- Ball Runner Block SNH
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1621 718 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class	Seal for ball runner block					
		C1	C2	C3		XP	without ball chain			with ball chain	
						SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1621 1	1	2	3	8	20	21	–	22	23	–
25	R1621 2	1	2	3	8	20	21	2Z	22	23	2Y
30	R1621 7	1	2	3	8	20	21	2Z	22	23	2Y
35	R1621 3	1	2	3	8	20	21	2Z	22	23	2Y
45	R1621 4	1	2	3	8	20	–	2Z	22	–	2Y
e.g.	R1621 7	1			8	20					

### SLH – Slimline, long, high R1624 ... 2.

#### Dynamic characteristics

Travel speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}} : a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 51.

#### Ordering example

Options:

- Ball Runner Block SLH
- Size 30
- Preload class C1
- Accuracy class XP
- With standard seal, without ball chain

Part number: R1624 718 20



#### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class	Seal for ball runner block					
		C1	C2	C3		XP	without ball chain			with ball chain	
						SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
25	R1624 2	1	2	3	8	20	21	2Z	22	23	2Y
30	R1624 7	1	2	3	8	20	21	2Z	22	23	2Y
35	R1624 3	1	2	3	8	20	21	2Z	22	23	2Y
45	R1624 4	1	2	3	8	20	–	2Z	22	–	2Y
e.g.	R1624 7	1			8	20					

1) Low-friction seal available for preload C1

#### Preload classes

C1 = preload 2% C

C2 = preload 8% C

C3 = preload 13% C

#### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal

#### Key to table

Gray numbers


= version/combination not preferred  
(longer delivery times in some cases)



## Application Examples

Rexroth High Precision Ball Runner Blocks are especially suited for the following applications:

### 1 Measuring

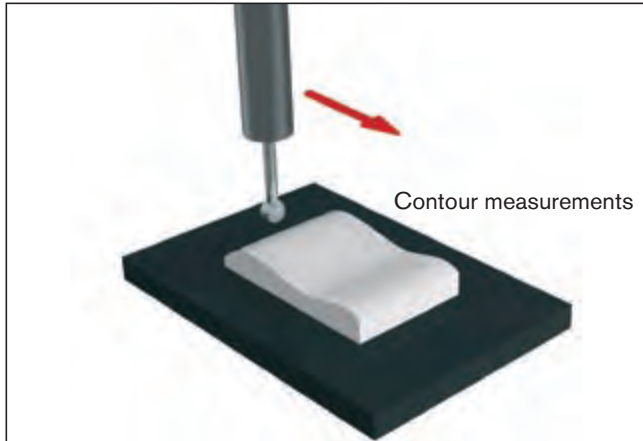


3D coordinate measuring machine

### 2 Grinding




Internal cylindrical grinding

### 3 Electrical discharge machining (EDM)

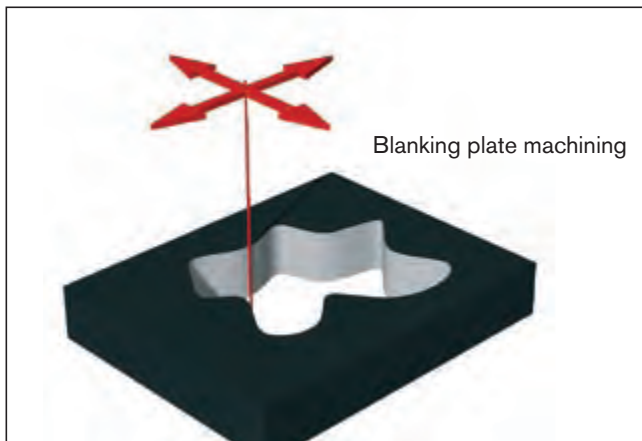


Wire EDM

### 4 Milling

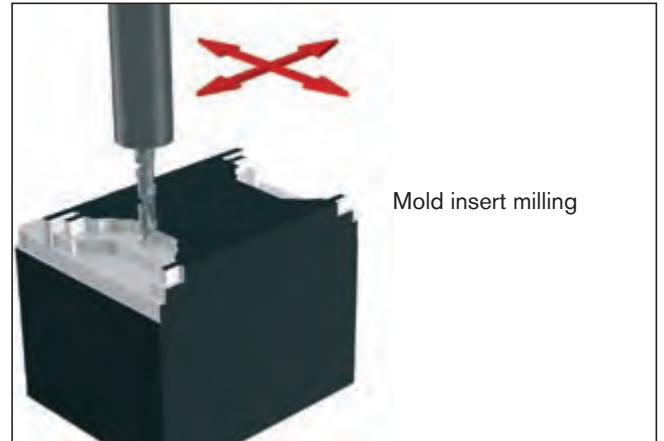


Hard milling

### 5 Turning

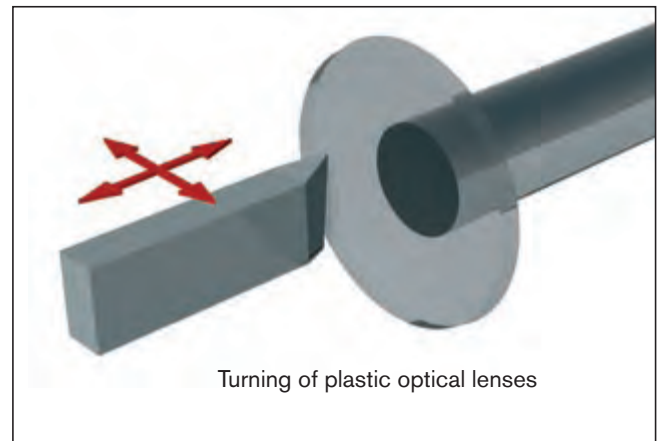

High precision turning

### 6 Microelectronics

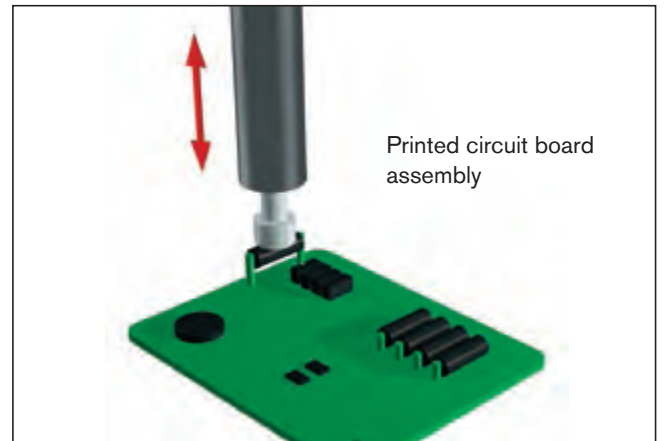

PCB assembly machines

These are just a few examples of the many possible applications. Simply ask us. We'll find the right solution for your needs.

High-Speed Ball Runner Blocks made of steel

## Product Description

### Characteristic features

- Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 10 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- Same load capability in all four main load directions
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- Lube ports with metal threads on all sides
- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class
- Optimum system rigidity through preloaded O-arrangement
- Electrically insulating due to the use of ceramic balls
- Existing range of accessories fully utilizable
- Top logistics that are unique worldwide

### Further highlights:

- High travel speed thanks to low mass of ceramic balls
- Attachments can be bolted to the ball runner blocks from above or below<sup>1)</sup>
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block
- Mounting threads provided on end faces for fixing of all add-on elements
- High rigidity in all load directions – permits applications with just one runner block per rail
- Integrated all-round sealing
- High torque load capacity
- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Smooth running thanks to optimized ball recirculation and guidance
- Available in five common sizes
- Ball runner blocks pre-lubricated in factory

1) depends on type

Overview of High-Speed Ball Runner Blocks made of steel



**Ceramic balls**  
 – Permit very high speeds

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged Slimline Wide Compact	F		
<b>Length</b>	Normal Long Short		N	
<b>Height</b>	Standard height High Low			S

High-Speed Ball Runner Blocks made of steel

## FNS – Flanged, normal, standard height

### R2001 ... 9.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 10 \text{ m/s}$

Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing and dimensions

☞ 37.



#### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class			Seal for ball runner block without ball chain	SS
			C2	H	P		
15	R2001 1	2	3	2		90	
20	R2001 8	2	3	2		90	
25	R2001 2	2	3	2		90	
30	R2001 7	2	3	2		90	
35	R2001 3	2	3	2		90	
e.g.	R2001 7	2	3			90	

#### Ordering example

Options:

- Ball Runner Block FNS
- Size 30
- Preload class C2
- Accuracy class H
- With standard seal, without ball chain

Part number: R2001 723 90

Size	Load capacities <sup>1)</sup> (N)		Load moments <sup>1)</sup> (Nm)				Weight (kg)
	C	C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	5 300	9 100	50	88	27	48	0.20
20	12 700	16 500	160	210	88	110	0.45
25	15 500	20 600	210	290	120	160	0.60
30	21 500	28 000	360	490	190	250	1.05
35	28 500	36 700	600	780	300	380	1.50

1) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

#### Preload classes

C2 = preload 8% C

#### Seals

SS = standard seal

# SNS – Slimline, normal, standard height

## R2011 ... 9.

### Dynamic characteristics

Travel speed:  $v_{\max} = 10 \text{ m/s}$

Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

### Note on lubrication:

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.

### Dimension drawing and dimensions

☞ 43.



### Ordering example

Options:

- Ball Runner Block SNS
- Size 30
- Preload class C2
- Accuracy class H
- With standard seal, without ball chain

Part number: R2011 723 90

### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class			Seal for ball runner block without ball chain	SS
			C2	H	P		
15	R2011 1	2	3	2		90	
20	R2011 8	2	3	2		90	
25	R2011 2	2	3	2		90	
30	R2011 7	2	3	2		90	
35	R2011 3	2	3	2		90	
e.g.	R2011 7	2	3			90	

Size	Load capacities <sup>1)</sup> (N)		Load moments <sup>1)</sup> (Nm)				Weight (kg)
	C	C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
15	5 300	9 100	50	88	27	48	0.15
20	12 700	16 500	160	210	88	110	0.35
25	15 500	20 600	210	290	120	160	0.45
30	21 500	28 000	360	490	190	250	0.80
35	28 500	36 700	600	780	300	380	1.15

1) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

### Preload classes

C2 = preload 8% C

### Seals

SS = standard seal

Super Ball Runner Blocks made of steel

## Product Description

### Characteristic features

- Automatically compensates for errors in alignment (of up to  $10'$  arc about two axes)
- Extra-compact design
- Same load capability in all four main load directions
- Wider permissible tolerances for parallelism and height offsets of the mounting surfaces
- Accuracy classes H and N
- Preload classes:  
C0 (without preload)  
C1 (preload 2% C)
- Smooth running due to optimized ball recirculation and entry zone geometry
- Low noise level and outstanding travel performance
- Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- Lube ports with metal threads on all sides
- Ball runner blocks pre-lubricated in factory
- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class

### Self-alignment

Rexroth's Super Ball Runner Blocks with self-aligning feature automatically compensate for errors in alignment to  $10'$  of arc. There is no load capacity reduction through compression across the edges. The centers of the mating surfaces supporting the steel load bearing plates serve as a rocking fulcrum.


Therefore slight errors in alignment between runner block and guide rail do not cause problems. Also, inaccuracies in machining, mounting errors or guide rail flex will automatically be corrected.

The self-aligning feature assures that the balls enter the load-bearing zone smoothly and that the load is distributed evenly across the entire row of balls.


The result is extra-smooth running and considerably longer service life.

With two Super runner blocks on one guide rail, it is also possible to produce tilt-free Ball Rail Systems with a high load capacity, particularly for handling applications.

### Internal ball load distribution in the case of angular errors $\alpha$

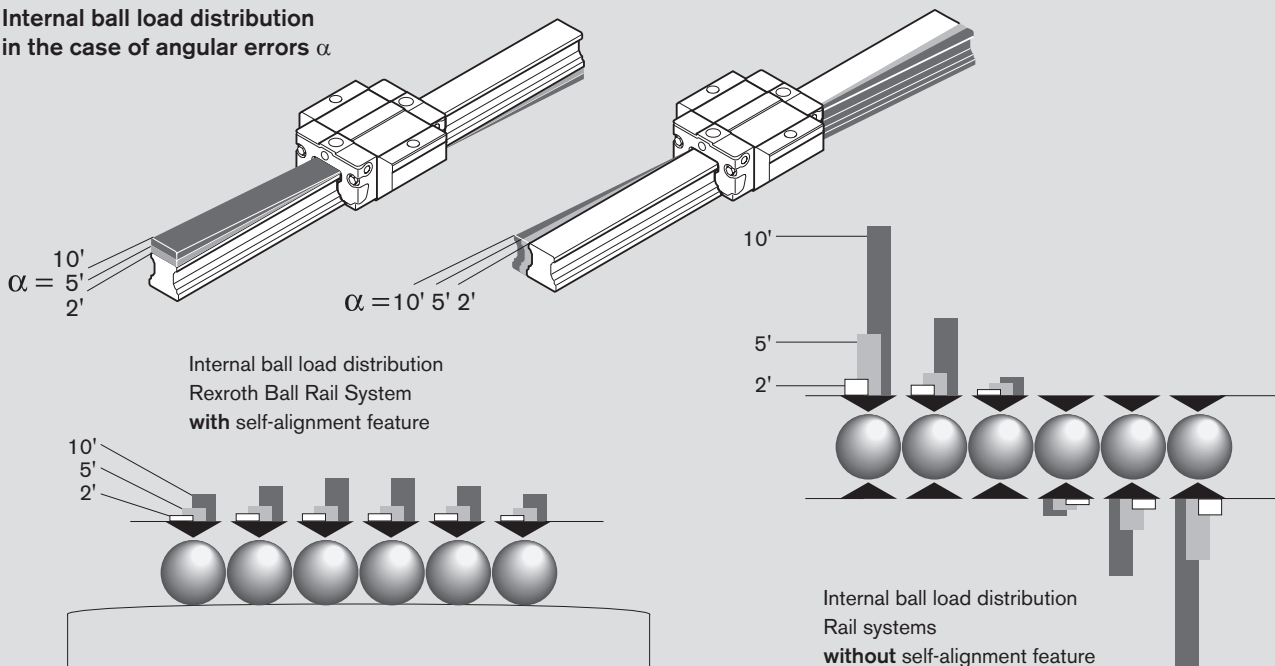

Overview of Super Ball Runner Blocks models made of steel

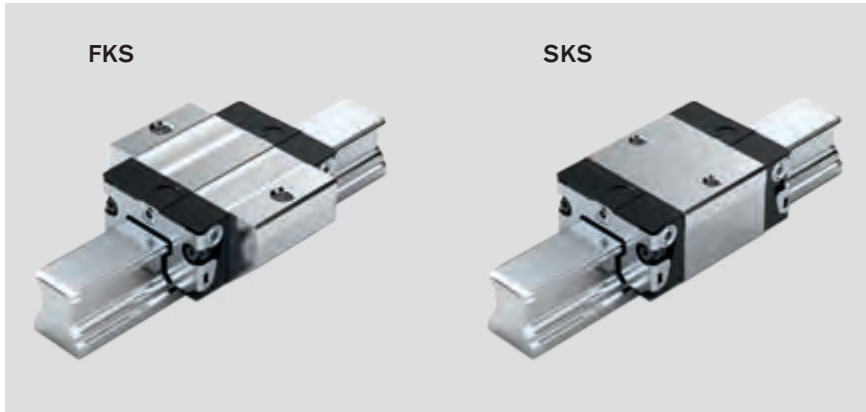

Definition Ball Runner Block design style		Code (example)		
		F	N	S
Width	Flanged	F	N	S
	Slimline			
	Wide Compact			
Length	Normal	N	S	
	Long			
	Short			
Height	Standard height	N	S	
	High			
	Low			



Super Ball Runner Blocks made of steel

## FKS – Flanged, short, standard height

### R1661 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$


Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Super Ball Runner Blocks FKS

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails  
SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
15	R1661 1	9	1	4	3	20	21
20	R1661 8	9	1	4	3	20	21
25	R1661 2	9	1	4	3	20	21
30	R1661 7	9	1	4	3	20	21
35	R1661 3	9	1	4	3	20	21
e.g.	R1661 7		1		3	20	

#### Ordering example

Options:

- Ball Runner Block FKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1661 713 20

#### Preload classes

C0 = without preload  
C1 = preload 2% C


#### Seals

SS = standard seal  
LS = low-friction seal

#### Key to table

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)

**Ball Runner Blocks FKS**

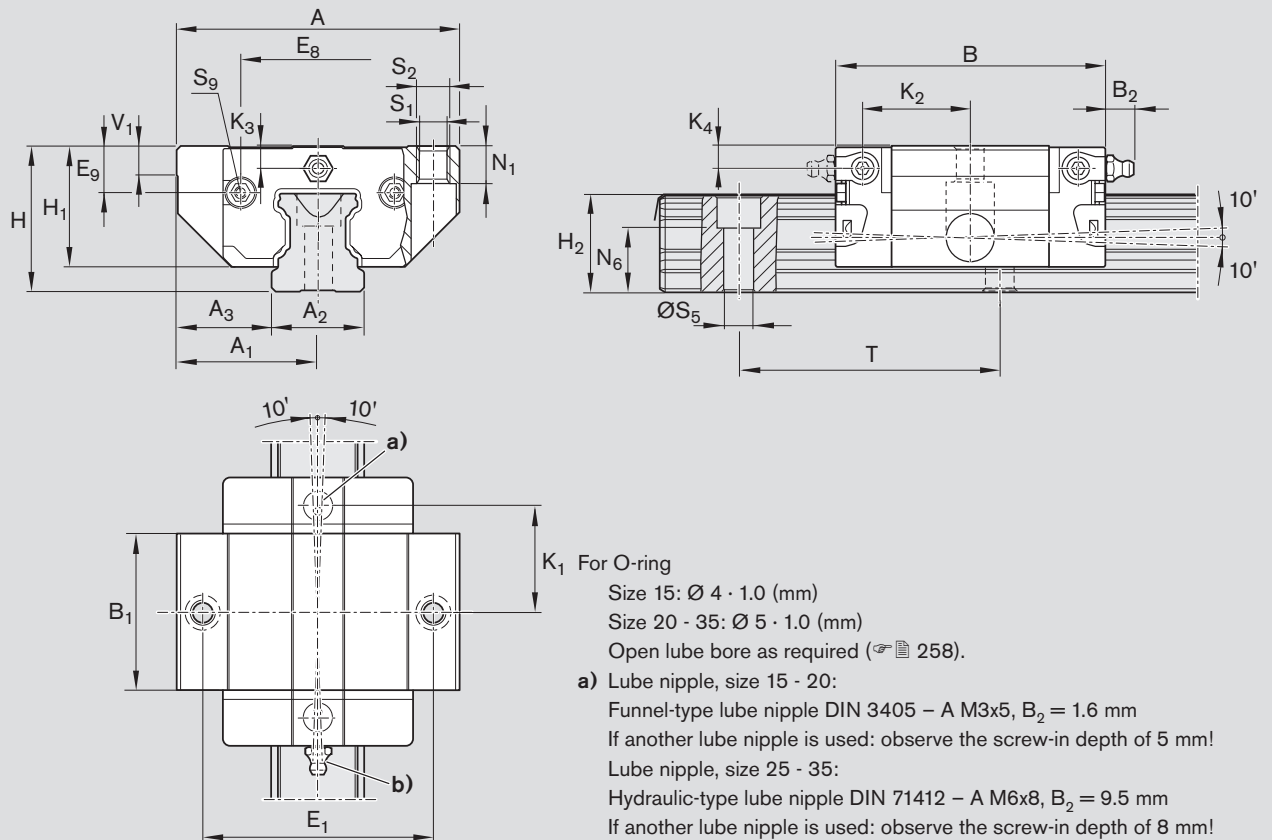

- K<sub>1</sub> For O-ring
  - Size 15: Ø 4 · 1.0 (mm)
  - Size 20 - 35: Ø 5 · 1.0 (mm)
  - Open lube bore as required (☞ 258).
- a) Lube nipple, size 15 - 20:
  - Funnel-type lube nipple DIN 3405 – A M3x5, B<sub>2</sub> = 1.6 mm
  - If another lube nipple is used: observe the screw-in depth of 5 mm!
- Lube nipple, size 25 - 35:
  - Hydraulic-type lube nipple DIN 71412 – A M6x8, B<sub>2</sub> = 9.5 mm
  - If another lube nipple is used: observe the screw-in depth of 8 mm!
- Lube nipples are provided (unmounted).
- Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	44.7	25.7	38	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	63	31.5	20	21.5	57.3	31.9	53	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	70	35.0	23	23.5	67.0	38.6	57	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	90	45.0	28	31.0	75.3	45.0	72	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	100	50.0	34	33.0	84.9	51.4	82	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensions (mm)										Weight (kg)	Load capacities <sup>3)</sup> (N)	Permissible load (N)	Load moments <sup>3)</sup> (Nm)	
	N <sub>1</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C	F <sub>max</sub>				M <sub>t</sub>	M <sub>t,max</sub>
15	5.2	10.3	4.3	M5	4.4	M2.5x3.5	60	5.0	0.15	3 900	1 500	39	15		
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.30	10 100	3 900	130	50		
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.50	11 400	4 400	170	65		
30	11.0	17.0	8.5	M10	9.0	M3x5	80	7.0	0.80	15 800	6 100	270	105		
35	12.0	20.5	8.5	M10	9.0	M3x5	80	8.0	1.20	21 100	8 100	450	175		

1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip

Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C** and **M<sub>t</sub>** from the table by 1.26.

Super Ball Runner Blocks made of steel

## SKS – Slimline, short, standard height

### R1662 ... 2.

#### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$


Acceleration:  $a_{\max} = 500 \text{ m/s}^2$

(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

- Pre-lubricated

#### Further Super Ball Runner Blocks SKS

- Corrosion-resistant Ball Runner Blocks  
Resist CR  108

#### Note

Can be used on all Ball Guide Rails SNS.



#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	
		C0	C1	N	H	SS	LS
15	R1662 1	9	1	4	3	20	21
20	R1662 8	9	1	4	3	20	21
25	R1662 2	9	1	4	3	20	21
30	R1662 7	9	1	4	3	20	21
35	R1662 3	9	1	4	3	20	21
e.g.	R1662 7		1		3	20	

#### Ordering example

Options:

- Ball Runner Block SKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1662 713 20

#### Preload classes

C0 = without preload

C1 = preload 2% C

#### Seals

SS = standard seal



LS = low-friction seal

#### Key to table

Gray numbers

= version/combination not preferred  
(longer delivery times in some cases)

**Ball Runner Blocks SKS**

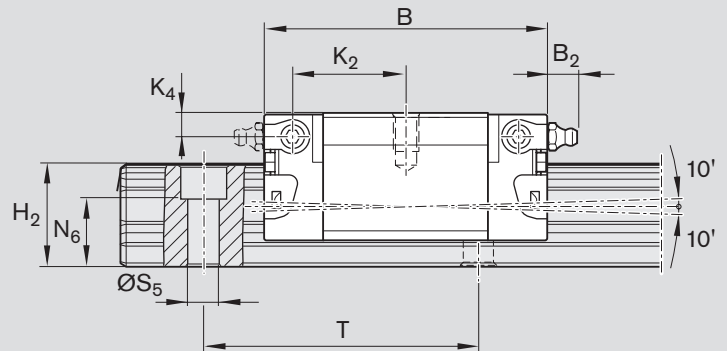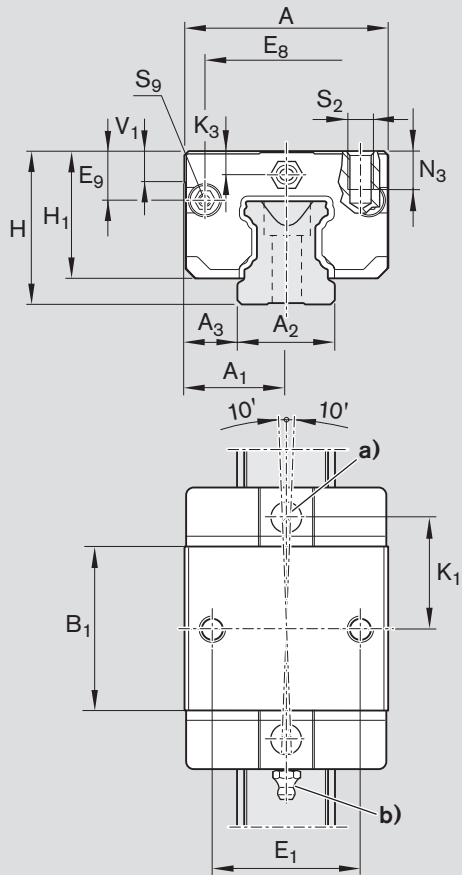

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 35:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 256).
- b) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405 – A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 35:  
 Hydraulic-type lube nipple DIN 71412 – A M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	44.7	25.7	26	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	44	22	20	12.0	57.3	31.9	32	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	48	24	23	12.5	67.0	38.6	35	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	60	30	28	16.0	75.3	45.0	40	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	70	35	34	18.0	84.9	51.4	50	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensions (mm)								Weight (kg)	Load capacities <sup>3)</sup> (N)	Permissible load (N)	Load moments <sup>3)</sup> (Nm)	
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C				F <sub>max</sub>	M <sub>t</sub>
15	6.0	10.3	M4	4.4	M2.5x3.5	60	5.0	0.10	3900	1500	39	15	
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.25	10100	3900	130	50	
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.35	11400	4400	170	65	
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.60	15800	6100	270	105	
35	13.0	20.5	M8	9.0	M3x5	80	8.0	0.90	21100	8100	450	175	

1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

3) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C** and **M<sub>t</sub>** from the table by 1.26.

Ball Runner Blocks made of aluminum

## Product Description

### Characteristic features

Rexroth Ball Rail Systems with aluminum runner blocks were specifically developed for use in industrial robots and general purpose machines calling for compact, lightweight rolling-element linear motion guideways. They are available in various accuracy classes, each with high load capacity. These highly compact and weight-saving assemblies are available in five common sizes and offer the same load capacities in all four main load directions.

### Highlights


- High torque load capacity
- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Very low weight: 60% lighter than the equivalent steel runner blocks
- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class

### Further highlights

- Low noise level and outstanding travel performance
- Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- Wider permissible tolerances for parallelism and height offsets of the mounting surfaces
- Accuracy classes H and N can be combined with any of the rails in each accuracy class
- Lube ports with metal threads on all sides
- Mounting threads provided on end faces for fixing of all add-on elements
- Ball guide rails in accuracy class H also available with surface protection Resist CR (matte-silver hard chrome plated)
- Smooth, light running thanks to optimized ball recirculation and ball or ball chain guidance
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block<sup>1)</sup>
- Attachments can be bolted to the ball runner blocks from above or below<sup>1)</sup>
- Predrilled locating pin holes in the runner blocks
- Available with ball chain as an option
- Ball runner blocks pre-lubricated in factory

1) depends on type

Overview of Ball Runner Block models made of aluminum

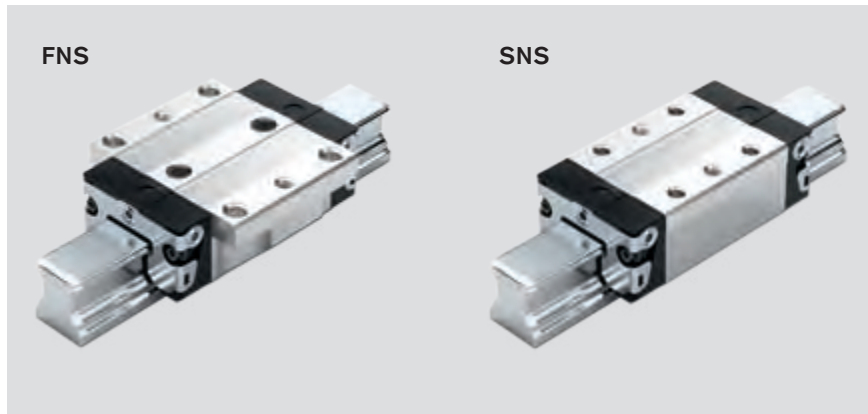

**Ball chain (optional)**  
 – Optimizes noise levels

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged Slimline Wide Compact	F		
<b>Length</b>	Normal Long Short		N	
<b>Height</b>	Standard height High Low			S

Ball Runner Blocks made of aluminum

# FNS – Flanged, normal, standard height

## R1631 ... 2.

### Dynamic characteristics


Travel speed:  $v_{max} = 5 \text{ m/s}$   
 Acceleration:  $a_{max} = 500 \text{ m/s}^2$   
 (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

### Note on lubrication

– Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.

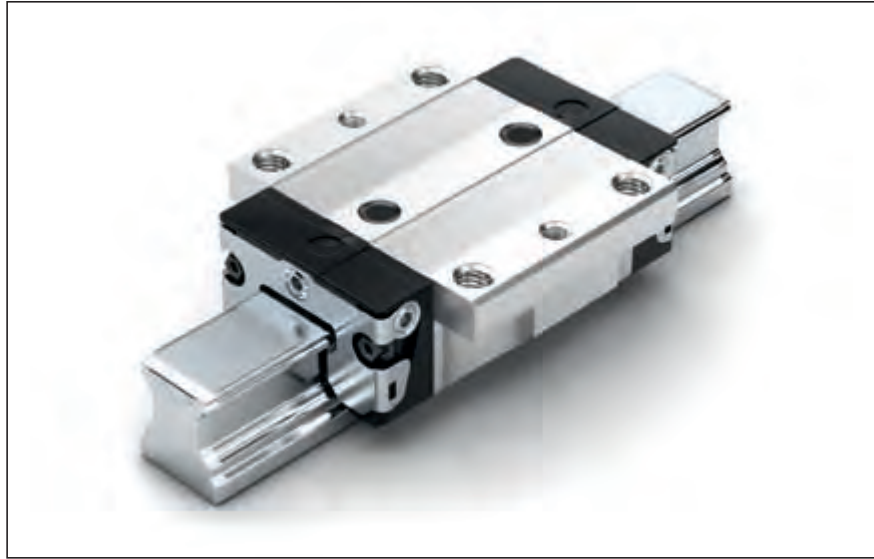

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block			
		C0	C1	N	H	without ball chain		with ball chain	
						SS	LS	SS	LS
15	R1631 1	9	1	4	3	20	21	22	23
20	R1631 8	9	1	4	3	20	21	22	23
25	R1631 2	9	1	4	3	20	21	22	23
30	R1631 7	9	1	4	3	20	21	22	23
35	R1631 3	9	1	4	3	20	21	22	23
e.g.	R1631 7		1		3	20			

### Ordering example

- Options:
- Ball Runner Block FNS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1631 713 20

Size	Load capacities <sup>1)</sup> (N)	Permissible load (N)	Load moments <sup>1)</sup> (Nm)			
			without ball chain		with ball chain	
	C	F <sub>max</sub>	M <sub>t</sub>	M <sub>t max</sub>	M <sub>L</sub>	M <sub>L max</sub>
15	7 800	3 000	74	29	40	16
20	18 800	7 200	240	92	130	50
25	22 800	8 800	320	125	180	70
30	31 700	12 200	540	210	290	110
35	41 900	16 200	890	345	440	170

1) Load capacities and moments for Ball Runner Block **without** ball chain.  
 Load capacities and moments for Ball Runner Block **with** ball chain 8.  
 Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values C, M<sub>t</sub> and M<sub>L</sub> from the table by 1.26.

### Preload classes

C0 = without preload  
 C1 = preload 2% C


### Seals

SS = standard seal  
 LS = low-friction seal

### Key to table

Gray numbers  
 = version/combination not preferred  
 (longer delivery times in some cases)

**Ball Runner Blocks FNS**

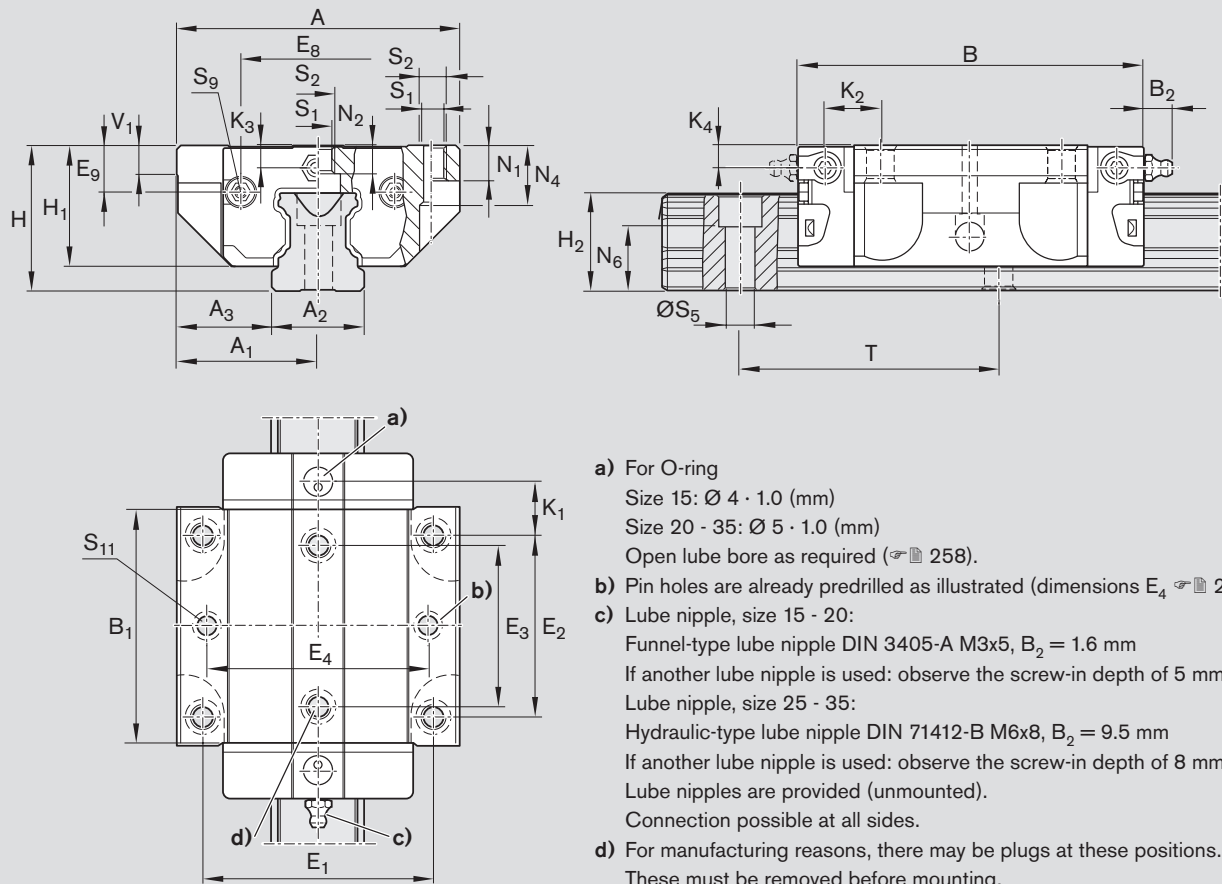

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	58.2	39.2	38	30	26	24.55	6.70	24	19.90	16.30	16.20	8.00	9.6	3.20	3.20
20	63	31.5	20	21.5	75.0	49.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	11.80	11.8	3.35	3.35
25	70	35.0	23	23.5	86.2	57.8	57	45	40	38.30	11.50	36	29.90	24.45	24.25	12.45	13.6	5.50	5.50
30	90	45.0	28	31.0	97.7	67.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	14.00	15.7	6.05	6.05
35	100	50.0	34	33.0	110.5	77.0	82	62	52	58.00	17.35	48	40.40	32.15	31.85	14.50	16.0	6.90	6.90

Size	Dimensions (mm)										Weight (kg)	
	N <sub>1</sub>	N <sub>2</sub>	N <sub>4</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	S <sub>11</sub>	T		V <sub>1</sub>
15	5.2	4.40	10.3	10.3	4.3	M5	4.4	M2.5x3.5	3.7	60	5.0	0.10
20	7.7	5.20	13.5	13.2	5.3	M6	6.0	M3x5	4.7	60	6.0	0.24
25	9.3	7.00	17.8	15.2	6.7	M8	7.0	M3x5	5.7	60	7.5	0.30
30	11.0	7.90	20.5	17.0	8.5	M10	9.0	M3x5	7.7	80	7.0	0.55
35	12.0	10.15	24.0	20.5	8.5	M10	9.0	M3x5	7.7	80	8.0	0.75

1) Dimension H<sub>2</sub> with cover strip  
 2) Dimension H<sub>2</sub> without cover strip



Ball Runner Blocks made of aluminum

# SNS – Slimline, normal, standard height

## R1632 ... 2.

### Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$   
 Acceleration:  $a_{max} = 500 \text{ m/s}^2$   
 (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

### Note on lubrication

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.



### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block			
		C0	C1	N	H	without ball chain		with ball chain	
						SS	LS	SS	LS
15	R1632 1	9	1	4	3	20	21	22	23
20	R1632 8	9	1	4	3	20	21	22	23
25	R1632 2	9	1	4	3	20	21	22	23
30	R1632 7	9	1	4	3	20	21	22	23
35	R1632 3	9	1	4	3	20	21	22	23
e.g.	R1632 7		1		3	20			

### Ordering example

Options:

- Ball Runner Block SNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1632 713 20

Size	Load capacities <sup>1)</sup> (N)	Permissible load (N)	Load moments <sup>1)</sup> (Nm)			
	C		F <sub>max</sub>	M <sub>t</sub>	M <sub>t max</sub>	M <sub>L</sub>
15	7 800	3 000	74	29	40	16
20	18 800	7 200	240	92	130	50
25	22 800	8 800	320	125	180	70
30	31 700	12 200	540	210	290	110
35	41 900	16 200	890	345	440	170

1) Load capacities and moments for Ball Runner Block **without** ball chain.

Load capacities and moments for Ball Runner Block **with** ball chain 8.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison:

Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

### Preload classes

- C0 = without preload
- C1 = preload 2% C




### Seals

- SS = standard seal
- LS = low-friction seal

### Key to table

Gray numbers  
 = version/combination not preferred  
 (longer delivery times in some cases)

## Ball Runner Blocks SNS

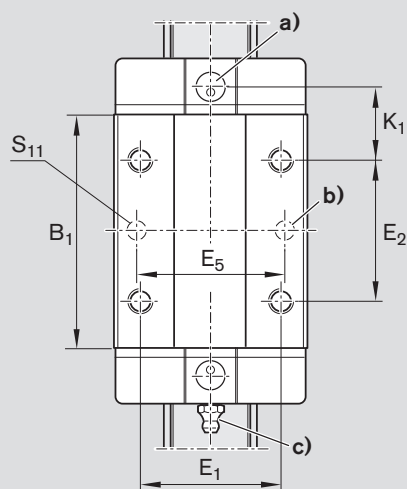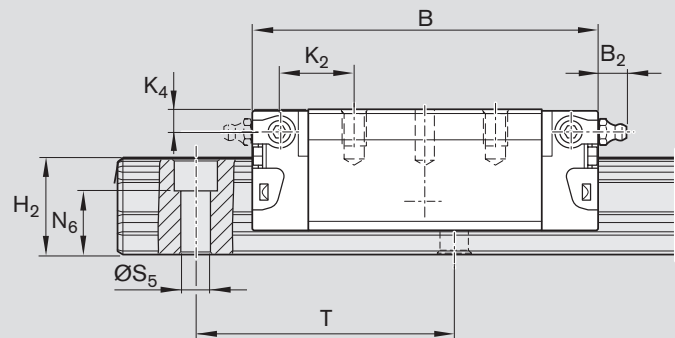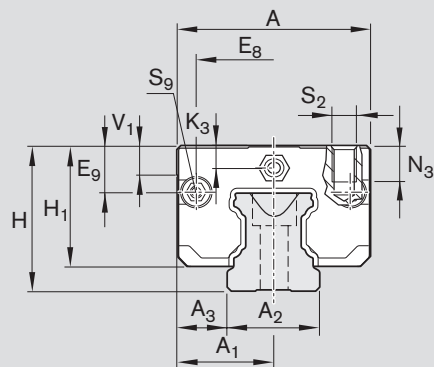

- a) For O-ring  
 Size 15:  $\text{Ø } 4 \cdot 1.0$  (mm)  
 Size 20 - 35:  $\text{Ø } 5 \cdot 1.0$  (mm)  
 Open lube bore as required ( $\text{Ø } \text{H } 258$ ).
- b) Pin holes are already predrilled as illustrated (dimensions  $E_5$   $\text{Ø } \text{H } 235$ ).
- c) Lube nipple, size 15 - 20:  
 Funnel-type lube nipple DIN 3405-A M3x5,  $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25 - 35:  
 Hydraulic-type lube nipple DIN 71412-B M6x8,  $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.

Size	Dimensions (mm)																	
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	58.2	39.2	26	26	24.55	6.70	24	19.90	16.30	16.20	10.00	11.60	3.20	3.20
20	44	22	20	12.0	75.0	49.6	32	36	32.50	7.30	30	25.35	20.75	20.55	13.80	13.80	3.35	3.35
25	48	24	23	12.5	86.2	57.8	35	35	38.30	11.50	36	29.90	24.45	24.25	17.45	18.60	5.50	5.50
30	60	30	28	16.0	97.7	67.4	40	40	48.40	14.60	42	35.35	28.55	28.35	20.00	21.70	6.05	6.05
35	70	35	34	18.0	110.5	77.0	50	50	58.00	17.35	48	40.40	32.15	31.85	20.50	22.00	6.90	6.90

Size	Dimensions (mm)								Weight (kg)
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	S <sub>11</sub>	T	V <sub>1</sub>	
15	6.0	10.3	M4	4.4	M2.5x3.5	3.7	60	5.0	0.10
20	7.5	13.2	M5	6.0	M3x5	4.7	60	6.0	0.20
25	9.0	15.2	M6	7.0	M3x5	5.7	60	7.5	0.35
30	12.0	17.0	M8	9.0	M3x5	7.7	80	7.0	0.45
35	13.0	20.5	M8	9.0	M3x5	7.7	80	8.0	0.65


1) Dimension H<sub>2</sub> with cover strip

2) Dimension H<sub>2</sub> without cover strip

Corrosion-Resistant Ball Runner Blocks

# Product Description, Resist NR


## General notes on Ball Runner Blocks in Resist NR

For part numbers, see the following pages. For dimensions, dynamic characteristics, load capacities, rigidity and moment loads, see the corresponding Standard Ball Runner Blocks  36 – 47.

## Corrosion-resistant Ball Runner Block body, Resist NR

Ball runner block body made of corrosion-resistant steel per EN 10088. Rexroth recommends this version for applications requiring corrosion protection. Fast delivery.


## Tolerances as for Standard runner blocks made of steel

Since the Resist NR version does not involve a coating, all the dimensions and tolerances are identical to those of the Standard steel version (“Accuracy classes and their tolerances”  26).

## Preload classes for Resist NR

C0 = without preload  
C1 = preload 2% C

## Overview of Standard Ball Runner Block models in Resist NR

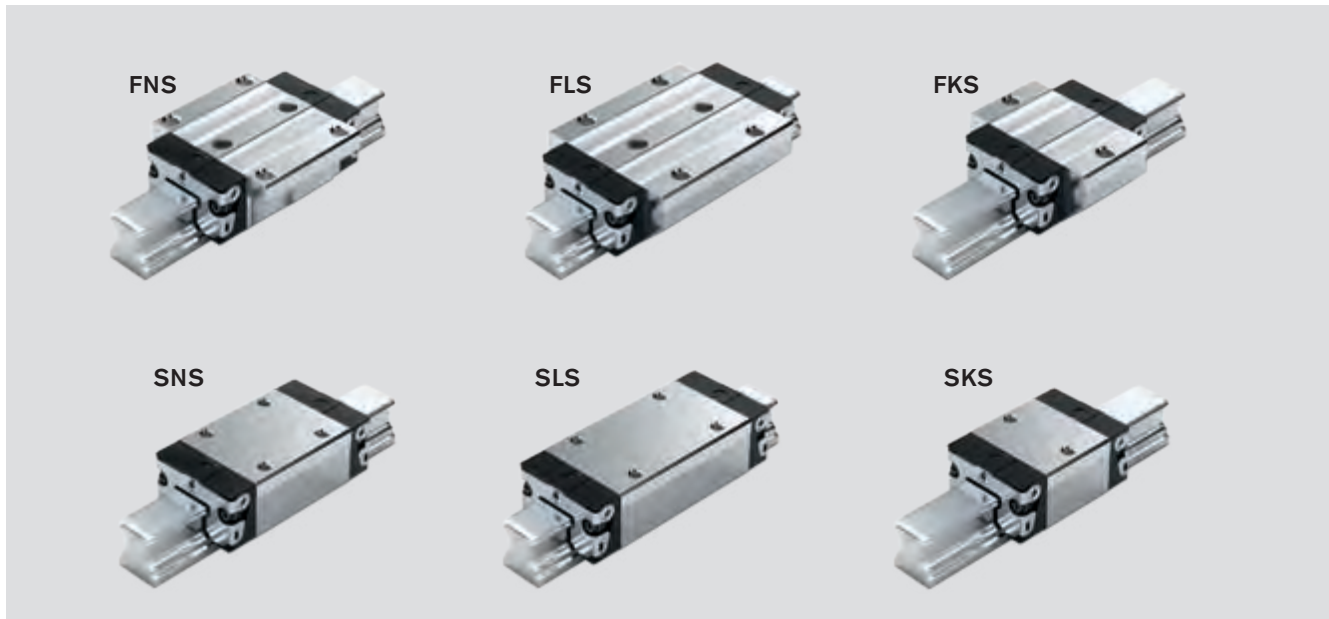

**Ball chain (optional)**  
– Optimizes noise levels

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged	F		
	Slimline			
	Wide			
	Compact			
<b>Length</b>	Normal		N	
	Long			
	Short			
<b>Height</b>	Standard height			S
	High			
	Low			

## Standard Ball Runner Blocks, Resist NR

**FNS – Flanged, normal, standard height**  
R2001 ... 3.

### Note on lubrication

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.



### Dimension drawing, dimensions and technical data 37.

### Ordering example

Options:

- Ball Runner Block NR, FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2001 713 30

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	H	Seal for ball runner block					
		C0	C1			without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R2001 1	9	–		3	30	31	–	32	33	–
20	R2001 8	9	–		3	30	31	–	32	33	–
25	R2001 2	9	–		3	30	31	–	32	33	–
30	R2001 7	9	1		3	30	31	–	32	33	–
					3	30	31	3Z	32	33	3Y
35	R2001 3	9	1		3	30	31	–	32	33	–
					3	30	31	3Z	32	33	3Y
e.g.	R2001 7		1		3	30					

**FLS – Flanged, long, standard height**  
R2002 ... 3.

### Note on lubrication

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.



### Dimension drawing, dimensions and technical data 39.

### Ordering example

Options:

- Ball Runner Block NR, FLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2002 713 30

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	H	Seal for ball runner block					
		C0	C1			without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R2002 1	9	–		3	30	31	–	32	33	–
20	R2002 8	9	–		3	30	31	–	32	33	–
25	R2002 2	9	–		3	30	31	–	32	33	–
30	R2002 7	9	1		3	30	31	–	32	33	–
					3	30	31	3Z	32	33	3Y
35	R2002 3	9	1		3	30	31	–	32	33	–
					3	30	31	3Z	32	33	3Y
e.g.	R2002 7		1		3	30					

### Preload classes

- C0 = without preload
- C1 = preload 2% C

### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

### Key to table

- Gray numbers = version/combination not preferred (longer delivery times in some cases)

Corrosion-Resistant Ball Runner Blocks

# Standard Ball Runner Blocks, Resist NR

**FKS – Flanged, short, standard height**  
R2000 ... 3.

**Note on lubrication**

- Pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.



**Dimension drawing, dimensions and technical data** 41.

**Ordering example**

Options:

- Ball Runner Block NR, FKS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R2000 713 30

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block					
		C0	C1		without ball chain			with ball chain		
				H	SS	LS	DS	SS	LS	DS
15	R2000 1	9	-	3	30	31	-	32	33	-
20	R2000 8	9	-	3	30	31	-	32	33	-
25	R2000 2	9	-	3	30	31	-	32	33	-
30	R2000 7	9	1	3	30	31	-	32	33	-
				3	30	31	3Z	32	33	3Y
35	R2000 3	9	1	3	30	31	-	32	33	-
				3	30	31	3Z	32	33	3Y
e.g.	R2000 7		1	3	30					

**SNS – Slimline, normal, standard height**  
R2011 ... 3.

**Note on lubrication**

- Pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.



**Dimension drawing, dimensions and technical data** 43.

**Ordering example**

Options:

- Ball Runner Block NR, SNS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R2011 713 30

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block					
		C0	C1		without ball chain			with ball chain		
				H	SS	LS	DS	SS	LS	DS
15	R2011 1	9	-	3	30	31	-	32	33	-
20	R2011 8	9	-	3	30	31	-	32	33	-
25	R2011 2	9	-	3	30	31	-	32	33	-
30	R2011 7	9	1	3	30	31	-	32	33	-
				3	30	31	3Z	32	33	3Y
35	R2011 3	9	1	3	30	31	-	32	33	-
				3	30	31	3Z	32	33	3Y
e.g.	R2011 7		1	3	30					

**Preload classes**

- C0 = without preload
- C1 = preload 2% C

**Seals**

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

**Key to table**

- Gray numbers = version/combination not preferred (longer delivery times in some cases)

## Standard Ball Runner Blocks, Resist NR

### SLS – Slimline, long, standard height R2012 ... 3.

#### Note on lubrication

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.



#### Dimension drawing, dimensions and technical data 45.

#### Ordering example

Options:

- Ball Runner Block NR, SLS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2012 713 30

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	H	Seal for ball runner block					
		C0	C1			without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R2012 1	9			3	30	31	–	32	33	–
20	R2012 8	9			3	30	31	–	32	33	–
25	R2012 2	9			3	30	31	–	32	33	–
30	R2012 7	9			3	30	31	–	32	33	–
			1		3	30	31	3Z	32	33	3Y
35	R2012 3	9			3	30	31	–	32	33	–
			1		3	30	31	3Z	32	33	3Y
e.g.	R2012 7		1		3	30					

### SKS – Slimline, short, standard height R2010 ... 3.

#### Note on lubrication

- Pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.



#### Dimension drawing, dimensions and technical data 47.

#### Ordering example

Options:

- Ball Runner Block NR, SKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2010 713 30

#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	H	Seal for ball runner block					
		C0	C1			without ball chain			with ball chain		
						SS	LS	DS	SS	LS	DS
15	R2010 1	9	–		3	30	31	–	32	33	–
20	R2010 8	9	–		3	30	31	–	32	33	–
25	R2010 2	9	–		3	30	31	–	32	33	–
30	R2010 7	9			3	30	31	–	32	33	–
			1		3	30	31	3Z	32	33	3Y
35	R2010 3	9			3	30	31	–	32	33	–
			1		3	30	31	3Z	32	33	3Y
e.g.	R2010 7		1		3	30					

#### Preload classes

- C0 = without preload
- C1 = preload 2% C

#### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

#### Key to table

- Gray numbers = version/combination not preferred (longer delivery times in some cases)

Corrosion-Resistant Ball Runner Blocks

## Product Description, Resist NR II

### Characteristic features

Ball Rail Systems in Resist NR II, made of corrosion-resistant steel<sup>1)</sup> are specifically intended for use in applications involving aqueous media, very dilute acids, alkalis or salt solutions. They are particularly suitable for environments with a relative humidity of over 70% and temperatures above 30 °C.

Conditions like these are found above all in cleaning systems, galvanization and pickling lines, steam degreasing systems, and also cooling equipment.

Since they have built-in corrosion protection, Ball Rail Systems Resist NR II are also ideal for use in clean rooms and for general printed circuit board assembly. Other application areas include the pharmaceuticals and food industries.

### Highlights

- All metal parts made of corrosion-resistant steel
- Available in five common sizes
- Excellent dynamic characteristics:  
Travel speed:  $v_{\max} = 5 \text{ m/s}$   
Acceleration:  $a_{\max} = 500 \text{ m/s}^2$
- Same load capacities in all four main load directions
- Available in accuracy classes N, H and P, up to preload class C2 (preload = 8% C)
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- Lube ports with metal threads on all sides
- Available with ball chain as an option


### Further highlights

- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class (including those made of steel, aluminum, Resist NR and Resist CR)
- Optimum system rigidity through preloaded O-arrangement
- Existing range of accessories fully utilizable
- Attachments can be bolted to the ball runner blocks from above or below<sup>2)</sup>
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block<sup>2)</sup>
- Mounting threads provided on end faces for fixing of all add-on elements
- High rigidity in all load directions – permits applications with just one runner block per rail
- Integrated all-round sealing
- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Smooth, light running thanks to optimized ball recirculation and ball or ball chain guidance
- Ball Guide Rails Resist NR II are available with or without cover strip and for mounting from above or below
- Ball Runner Blocks also available with chrome-plated guide rails

- 1) Resist NR II:  
Ball runner block body, ball guide rail and all steel parts made from corrosion-resistant steel per EN 10088
- 2) depends on type



Overview of Standard Ball Runner Block models in Resist NR II

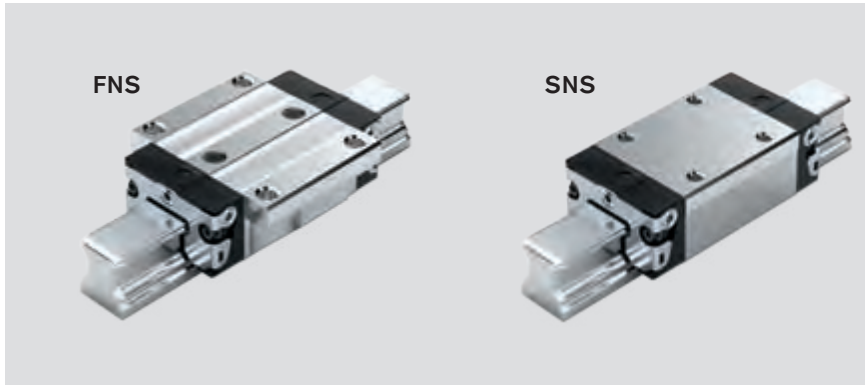

**Ball chain (optional)**  
 – Optimizes noise levels

Definition Ball Runner Block design style		Code (example)		
		F	N	S
<b>Width</b>	Flanged Slimline Wide Compact	F		
<b>Length</b>	Normal Long Short		N	
<b>Height</b>	Standard height High Low			S



Corrosion-Resistant Ball Runner Blocks

# Standard Ball Runner Blocks, Resist NR II

**FNS – Flanged, normal, standard height**  
R2001 ... 0.

**Dynamic characteristics**


Travel speed:  $v_{max} = 5 \text{ m/s}$   
Acceleration:  $a_{max} = 500 \text{ m/s}^2$   
(If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

**Note on lubrication**

- Not pre-lubricated
- No preservative oil

**Note**

Can be used on all Ball Guide Rails SNS.

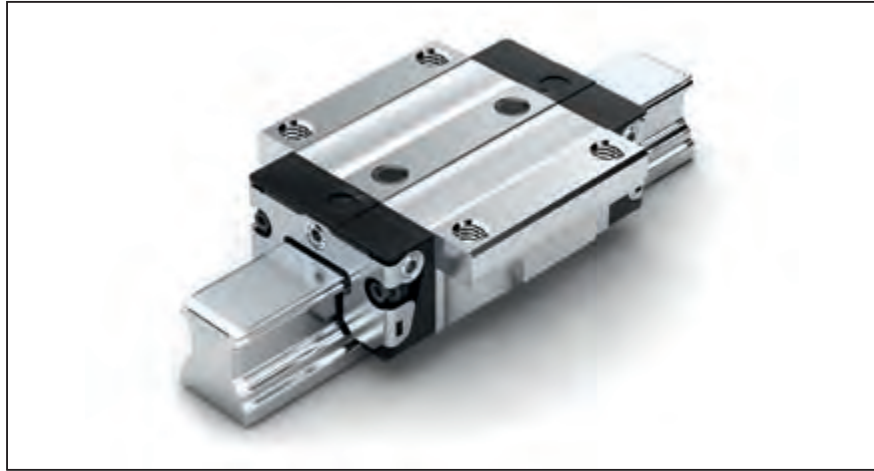

**Dimension drawing and dimensions**

☞ 37.

**Ordering example**

Options:

- Ball Runner Block NR, FNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2001 713 04

**Options and part numbers**

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block						
		C0	C1	C2	N	H	P	without ball chain		with ball chain				
							SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS		
15	R2001 1	9				4	3	-	04	05	-	06	07	-
				1		4	3	2	04	05	-	06	07	-
					2	-	3	2	04	-	-	06	-	-
20	R2001 8	9				4	3	-	04	05	-	06	07	-
				1		4	3	2	04	05	0X	06	07	0W
					2	-	3	2	04	-	0X	06	-	0W
25	R2001 2	9				4	3	-	04	05	-	06	07	-
				1		4	3	2	04	05	0X	06	07	0W
					2	-	3	2	04	-	0X	06	-	0W
30	R2001 7	9				4	3	-	04	05	-	06	07	-
				1		4	3	2	04	05	0X	06	07	0W
					2	-	3	2	04	-	0X	06	-	0W
35	R2001 3	9				4	3	-	04	05	-	06	07	-
				1		4	3	2	04	05	0X	06	07	0W
					2	-	3	2	04	-	0X	06	-	0W
e.g.	R2001 7		1			3		04						

- 1) Only with accuracy classes N and H
- 2) Load capacities and moments for Ball Runner Block **without** ball chain.

Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Size	Load capacities <sup>2)</sup> (N)		Load moments <sup>2)</sup> (Nm)			
	C	C <sub>0</sub>	M <sub>t</sub>	M <sub>10</sub>	M <sub>L</sub>	M <sub>L0</sub>
15	5 100	9 300	63	90	34	49
20	12 300	16 900	205	215	110	115
25	15 000	21 000	270	295	150	165
30	20 800	28 700	460	500	245	265
35	27 600	37 500	760	805	375	390

**Preload classes**

- C0 = without preload
- C1 = preload 2% C
- C2 = preload 8% C

**Seals**

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

**Key to table**

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)

# Standard Ball Runner Blocks, Resist NR II

**SNS – Slimline, normal, standard height**  
R2011 ... 0.

### Dynamic characteristics

Travel speed:  $v_{\max} = 5 \text{ m/s}$

Acceleration:  $a_{\max} = 500 \text{ m/s}^2$


(If  $F_{\text{comb}} > 2.8 \cdot F_{\text{pr}}$ :  $a_{\max} = 50 \text{ m/s}^2$ )

### Note on lubrication

- Not pre-lubricated
- No preservative oil

### Note

Can be used on all Ball Guide Rails SNS.

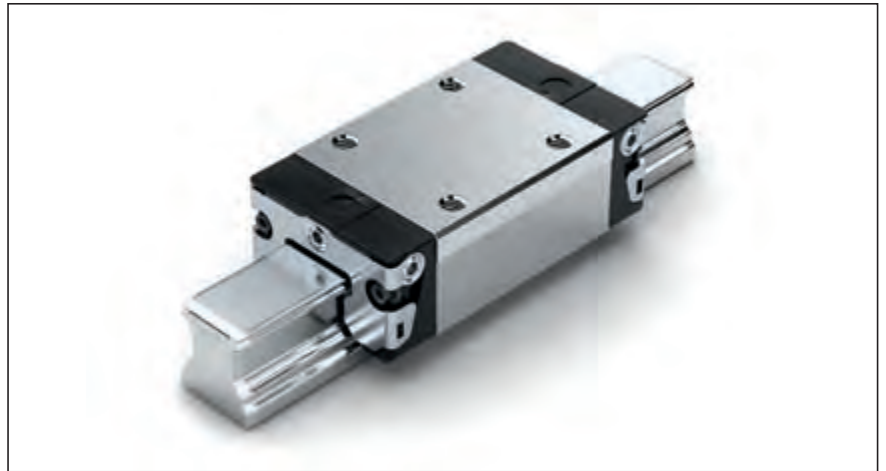

### Dimension drawing and dimensions

☞ 43.

### Ordering example

Options:

- Ball Runner Block NR, SNS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R2011 713 04

### Options and part numbers

Size	Ball runner block with size	Preload class			Accuracy class			Seal for ball runner block					
		C0	C1	C2	N	H	P	without ball chain			with ball chain		
								SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R2011 1	9	1	2	4	3	–	04	05	–	06	07	–
					4	3	2	04	05	–	06	07	–
					–	3	2	04	–	–	06	–	–
20	R2011 8	9	1	2	4	3	–	04	05	–	06	07	–
					4	3	2	04	05	0X	06	07	0W
					–	3	2	04	–	0X	06	–	0W
25	R2011 2	9	1	2	4	3	–	04	05	–	06	07	–
					4	3	2	04	05	0X	06	07	0W
					–	3	2	04	–	0X	06	–	0W
30	R2011 7	9	1	2	4	3	–	04	05	–	06	07	–
					4	3	2	04	05	0X	06	07	0W
					–	3	2	04	–	0X	06	–	0W
35	R2011 3	9	1	2	4	3	–	04	05	–	06	07	–
					4	3	2	04	05	0X	06	07	0W
					–	3	2	04	–	0X	06	–	0W
e.g.	R2011 7		1			3		04					

1) Only with accuracy classes N and H

2) Load capacities and moments for Ball Runner Block **without** ball chain.

Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values  $C$ ,  $M_t$  and  $M_L$  from the table by 1.26.

Size	Load capacities <sup>2)</sup> (N)		Load moments <sup>2)</sup> (Nm)			
	$C$	$C_0$	$M_t$	$M_{t0}$	$M_L$	$M_{L0}$
15	5 100	9 300	63	90	34	49
20	12 300	16 900	205	215	110	115
25	15 000	21 000	270	295	150	165
30	20 800	28 700	460	500	245	265
35	27 600	37 500	760	805	375	390

### Preload classes

C0 = without preload

C1 = preload 2% C

C2 = preload 8% C

### Seals

SS = standard seal

LS = low-friction seal

DS = double-lipped seal

### Key to table

Gray numbers

= version/combination not preferred (longer delivery times in some cases)

Corrosion-Resistant Ball Runner Blocks

# Product Description, Resist CR


## General notes on Ball Runner Blocks in Resist CR

For part numbers, see the following pages. For dimensions, dynamic characteristics, load capacities, rigidity and moment loads, see the corresponding Standard Ball Runner Blocks  
 ☞ 36 – 59  
 Heavy Duty Ball Runner Blocks  
 ☞ 60 – 71  
 Super Ball Runner Blocks ☞ 90 – 93

## Corrosion-resistant coating Resist CR

Ball runner block body made of steel with matte-silver hard-chrome plated corrosion-resistant coating.

## Different tolerances for Resist CR coating

 For ball runner blocks and guide rails in Resist CR, matte-silver hard chrome plated, different tolerances apply for the dimensions H and A<sub>3</sub> ("Accuracy classes and their tolerances" ☞ 26).

## Recommended ball runner blocks for Resist CR guide rails in accuracy class H for preload classes C0 and C1

Recommended Ball Runner Blocks  
 Sizes 15 – 65  
 – Accuracy class H  
 – **Preload class C0** = without preload

Recommended Ball Runner Blocks  
 Sizes 30 – 65  
 – Accuracy class H  
 – **Preload class C1** = 2% C

Definition Ball runner block design styles		Code (example)		
		F	N	S
<b>Width</b>	Flanged Slimline Wide	F		
<b>Length</b>	Normal Long Short		N	
<b>Height</b>	Standard height High Low			S

Overview of Standard and Heavy Duty Ball Runner Block models in Resist CR



Standard Ball Runner Blocks<sup>1)</sup> up to size 45



Ball chain (optional)  
– Optimizes noise levels



Heavy Duty Ball Runner Blocks<sup>2)</sup> from size 55



Super Ball Runner Blocks



1) With ball chain  
2) Without ball chain

Corrosion-Resistant Ball Runner Blocks

# Standard Ball Runner Blocks, Resist CR

**FNS – Flanged, normal, standard height**  
R1651 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data** 37.



**Ordering example**

- Options:
- Ball Runner Block CR, FNS
  - Size 45
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1651 413 70

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block			
		C0	C1		without ball chain		with ball chain	
				H	SS	DS	SS	DS
45	R1651 4	9		3	70	–	72	–
			1	3	70	7Z	72	7Y
e.g.	R1651 4		1	3	70			

**FLS – Flanged, long, standard height**  
R1653 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data** 39.



**Ordering example**

- Options:
- Ball Runner Block CR, FLS
  - Size 45
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1653 413 70

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block			
		C0	C1		without ball chain		with ball chain	
				H	SS	DS	SS	DS
45	R1653 4	9		3	70	–	72	–
			1	3	70	7Z	72	7Y
e.g.	R1653 4		1	3	70			

**Preload classes**

- C0 = without preload
- C1 = preload 2% C

**Seals**

- SS = standard seal
- DS = double-lipped seal

**Key to table**

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)

## Standard Ball Runner Blocks, Resist CR


**SNS – Slimline, normal, standard height**  
R1622 ... 7.

### Note on lubrication

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  43.

### Ordering example

Options:

- Ball Runner Block CR, SNS
- Size 45
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1622 413 70



### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block				
		C0	C1		without ball chain		with ball chain		
				H	SS	DS	SS	DS	
45	R1622 4	9		3	70	–	72	–	
			1	3	70	7Z	72	7Y	
e.g.	R1622 4		1	3	70				


**SLS – Slimline, long, standard height**  
R1623 ... 7.

### Note on lubrication

- Pre-lubricated

### Note

Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  45.

### Ordering example

Options:

- Ball Runner Block CR, SLS
- Size 45
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1623 413 70



### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block				
		C0	C1		without ball chain		with ball chain		
				H	SS	DS	SS	DS	
45	R1623 4	9		3	70	–	72	–	
			1	3	70	7Z	72	7Y	
e.g.	R1623 4		1	3	70				

### Preload classes

C0 = without preload  
C1 = preload 2% C

### Seals

SS = standard seal  
DS = double-lipped seal

### Key to table

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)




Corrosion-Resistant Ball Runner Blocks

# Standard Ball Runner Blocks, Resist CR

## SNH – Slimline, normal, high R1621 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  49.



### Ordering example

- Options:
- Ball Runner Block CR, SNH
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1621 713 70

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block					
		C0	C1		without ball chain			with ball chain		
				H	SS	LS	DS	SS	LS	DS
15	R1621 1	9	–	3	70	71	–	72	73	–
25	R1621 2	9	–	3	70	71	–	72	73	–
30	R1621 7	9	1	3	70	71	–	72	73	–
					70	71	7Z	72	73	7Y
35	R1621 3	9	1	3	70	71	–	72	73	–
					70	71	7Z	72	73	7Y
45	R1621 4	9	1	3	70	–	–	72	–	–
					70	–	7Z	72	–	7Z
e.g.	R1621 7		1	3	70					

## SLH – Slimline, long, high R1624 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  51.



### Ordering example

- Options:
- Ball Runner Block CR, SLH
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1624 713 70

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block					
		C0	C1		without ball chain			with ball chain		
				H	SS	LS	DS	SS	LS	DS
25	R1624 2	9	–	3	70	71	–	72	73	–
30	R1624 7	9	1	3	70	71	–	72	73	–
					70	71	7Z	72	73	7Y
35	R1624 3	9	1	3	70	71	–	72	73	–
					70	71	7Z	72	73	7Y
45	R1624 4	9	1	3	70	–	–	72	–	–
					70	–	7Z	72	–	7Z
e.g.	R1624 7		1	3	70					

### Preload classes

- C0 = without preload
- C1 = preload 2% C

### Seals

- SS = standard seal
- LS = low-friction seal
- DS = double-lipped seal

### Key to table

Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)

## Standard Ball Runner Blocks, Resist CR

### FNN – Flanged, normal, low profile R1693 ... 6.

#### Note on lubrication

- Not pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.

#### Dimension drawing, dimensions and technical data 53.

#### Ordering example

##### Options:

- Ball Runner Block CR, FNN
- Size 20
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1693 893 60



#### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class	Seal for ball runner block without ball chain	SS
		C0	H		
20	R1693 8	9	3		60
25	R1693 2	9	3		60
e.g.	R1693 8	9	3		60

### FKN – Flanged, short, low profile R1663 ... 6.

#### Note on lubrication

- Not pre-lubricated

#### Note

Can be used on all Ball Guide Rails SNS.


#### Dimension drawing, dimensions and technical data 55.

#### Ordering example

##### Options:

- Ball Runner Block CR, FKN
- Size 20
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1663 893 60

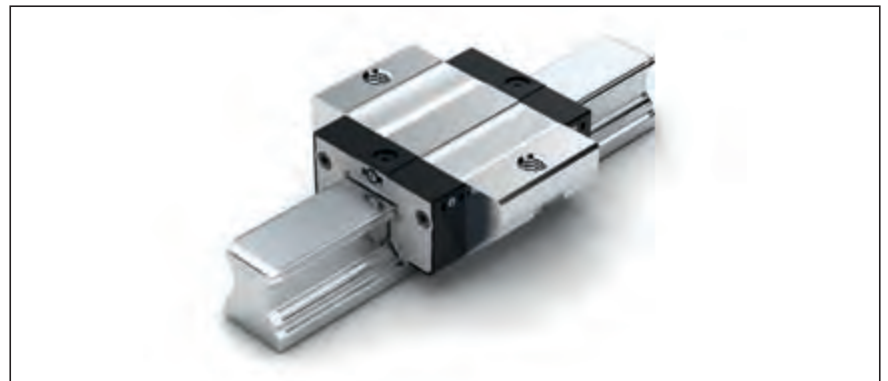

#### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class	Seal for ball runner block without ball chain	SS
		C0	H		
20	R1663 8	9	3		60
25	R1663 2	9	3		60
e.g.	R1663 8	9	3		60

#### Preload classes

C0 = without preload

#### Seals

SS = standard seal



Corrosion-Resistant Ball Runner Blocks

## Standard Ball Runner Blocks, Resist CR


**SNN – Slimline, normal, low profile**  
R1694 ... 6.

**Note on lubrication**

- Not pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  57.

**Ordering example**

Options:

- Ball Runner Block CR, SNN
- Size 20
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1694 893 60



**Options and part numbers**

Size	Ball runner block with size	Preload class	Accuracy class	Seal for ball runner block without ball chain
		C0	H	SS
20	R1694 8	9	3	60
25	R1694 2	9	3	60
e.g.	R1694 8	9	3	60

**SKN – Slimline, short, low profile**  
R1664 ... 6.

**Note on lubrication**

- Not pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  59.

**Ordering example**

Options:

- Ball Runner Block CR, SKN
- Size 20
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1664 893 60



**Options and part numbers**

Size	Ball runner block with size	Preload class	Accuracy class	Seal for ball runner block without ball chain
		C0	H	SS
20	R1664 8	9	3	60
25	R1664 2	9	3	60
e.g.	R1664 8	9	3	60

**Preload classes**

C0 = without preload

**Seals**

SS = standard seal

## Heavy Duty Ball Runner Blocks, Resist CR


**FNS – Flanged, normal, standard height**  
R1651 ... 6.

**Note on lubrication**

- Not pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.


**Dimension drawing, dimensions and technical data**  61.

**Ordering example**

Options:

- Ball Runner Block CR, FNS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1651 513 60

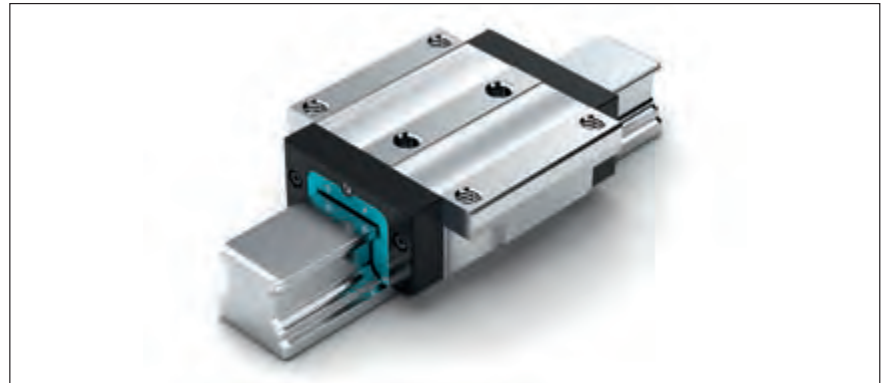

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain	SS
		C0	C1			
55	R1651 5	9	1	H	3	60
65	R1651 6	9	1	H	3	60
e.g.	R1651 5		1		3	60


**FLS – Flanged, long, standard height**  
R1653 ... 6.

**Note on lubrication**

- Not pre-lubricated

**Note**

Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  63.

**Ordering example**

Options:

- Ball Runner Block CR, FLS
- Size 55
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1653 513 60



**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain	SS
		C0	C1			
55	R1653 5	9	1	H	3	60
65	R1653 6	9	1	H	3	60
e.g.	R1653 5		1		3	60

**Preload classes**

C0 = without preload  
C1 = preload 2% C

**Seals**

SS = standard seal


Corrosion-Resistant Ball Runner Blocks


# Heavy Duty Ball Runner Blocks, Resist CR

**SNS – Slimline, normal, standard height**  
R1622 ... 6.

**Note on lubrication**  
– Not pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  65.

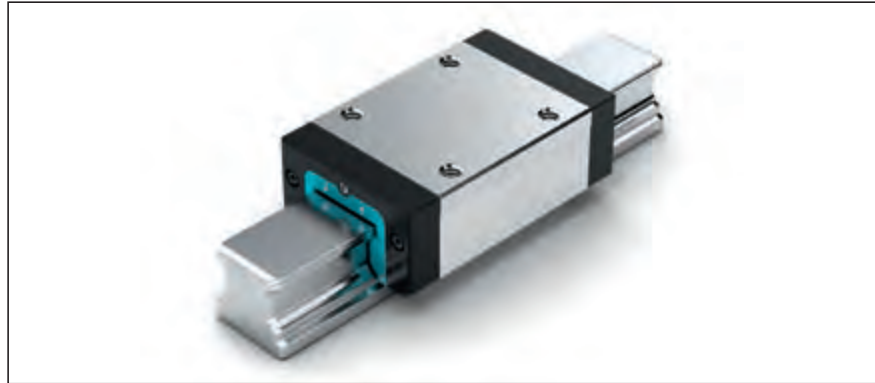

**Ordering example**

- Options:
- Ball Runner Block CR, SNS
  - Size 55
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1622 513 60


**Options and part numbers**


Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	SS
		C0	C1		H		
55	R1622 5	9	1		3		60
65	R1622 6	9	1		3		60
e.g.	R1622 5		1		3		60

**SLS – Slimline, long, standard height**  
R1623 ... 6.

**Note on lubrication**  
– Not pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

**Dimension drawing, dimensions and technical data**  67.

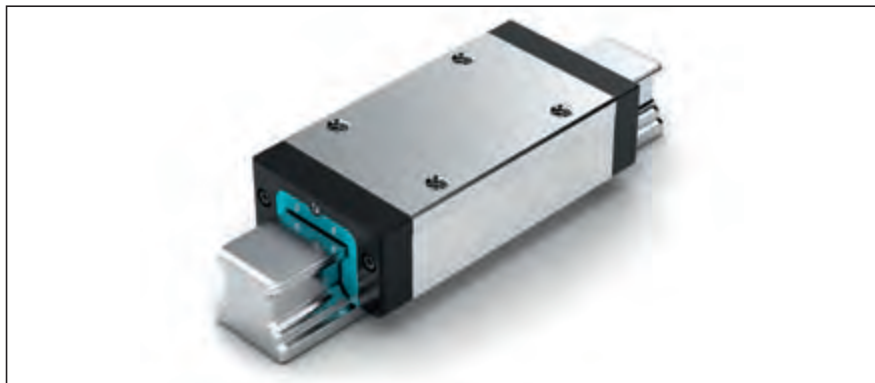

**Ordering example**

- Options:
- Ball Runner Block CR, SLS
  - Size 55
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1623 513 60

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class		Seal for ball runner block without ball chain	SS
		C0	C1		H		
55	R1623 5	9	1		3		60
65	R1623 6	9	1		3		60
e.g.	R1623 5		1		3		60

**Preload classes**

- C0 = without preload
- C1 = preload 2% C

**Seals**


SS = standard seal

## Heavy Duty Ball Runner Blocks, Resist CR

### SNH – Slimline, normal, high R1621 ... 6.

**Note on lubrication**  
– Not pre-lubricated


**Note**  
Can be used on all Ball Guide Rails  
SNS.

**Dimension drawing, dimensions and  
technical data**  69.

#### Ordering example

Options:

- Ball Runner Block CR, SNH
  - Size 55
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1621 513 60

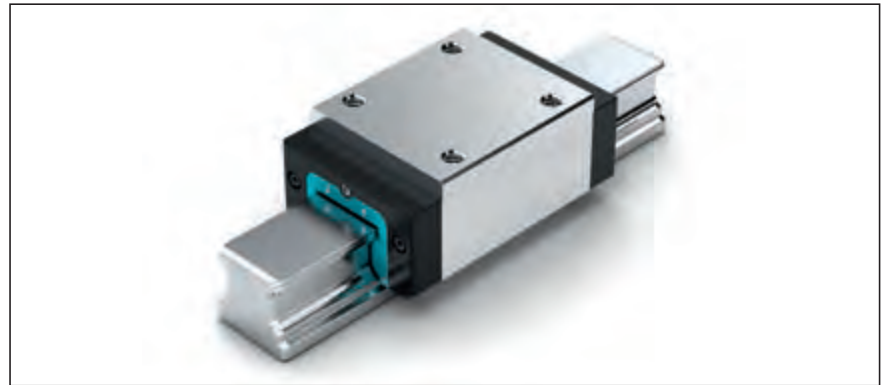


#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain	SS
		C0	C1			
55	R1621 5	9	1	H	3	60
e.g.	R1621 5		1		3	60

### SLH – Slimline, long, high R1624 ... 6.

**Note on lubrication**  
– Not pre-lubricated

**Note**  
Can be used on all Ball Guide Rails  
SNS.

**Dimension drawing, dimensions and  
technical data**  71.

#### Ordering example

Options:

- Ball Runner Block CR, SLH
  - Size 55
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1624 513 60



#### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain	SS
		C0	C1			
55	R1624 5	9	1	H	3	60
e.g.	R1624 5		1		3	60

#### Preload classes

C0 = without preload  
C1 = preload 2% C

#### Seals

SS = standard seal


Corrosion-Resistant Ball Runner Blocks

# Super Ball Runner Blocks, Resist CR

**FKS – Flanged, short, standard height**  
R1661 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

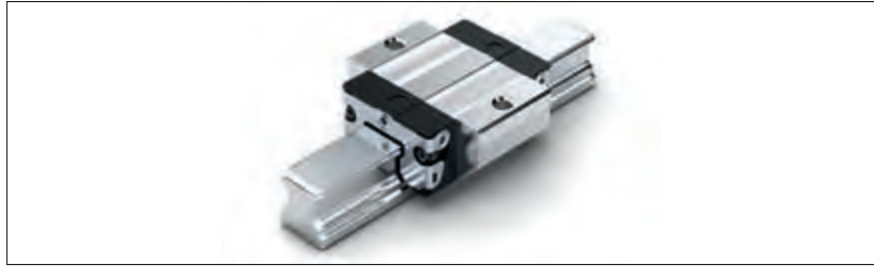

**Dimension drawing, dimensions and technical data** 91.

**Ordering example**

- Options:
- Ball Runner Block CR, FKS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1661 713 70


**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain		
		C0	C1		H	SS	LS
15	R1661 1	9	–	3	70	71	–
20	R1661 8	9	–	3	70	71	–
25	R1661 2	9	–	3	70	71	–
30	R1661 7	9	–	3	70	71	–
			1	3	70	71	7Z
35	R1661 3	9	–	3	70	71	–
			1	3	70	71	7Z
e.g.	R1661 7		1	3	70		

**SKS – Slimline, short, standard height**  
R1662 ... 7.

**Note on lubrication**  
– Pre-lubricated

**Note**  
Can be used on all Ball Guide Rails SNS.

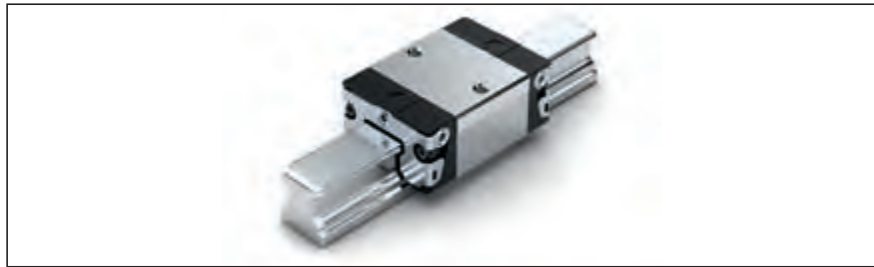

**Dimension drawing, dimensions and technical data** 93.

**Ordering example**

- Options:
- Ball Runner Block CR, SKS
  - Size 30
  - Preload class C1
  - Accuracy class H
  - With standard seal, without ball chain
- Part number: R1662 713 70

**Options and part numbers**

Size	Ball runner block with size	Preload class		Accuracy class	Seal for ball runner block without ball chain		
		C0	C1		H	SS	LS
15	R1662 1	9	–	3	70	71	–
20	R1662 8	9	–	3	70	71	–
25	R1662 2	9	–	3	70	71	–
30	R1662 7	9	–	3	70	71	–
			1	3	70	71	7Z
35	R1662 3	9	–	3	70	71	–
			1	3	70	71	7Z
e.g.	R1662 7		1	3	70		

**Preload classes**  
C0 = without preload  
C1 = preload 2% C

**Seals**  
SS = standard seal  
LS = low-friction seal  
DS = double-lipped seal

**Key to table**  
Gray numbers  
= version/combination not preferred  
(longer delivery times in some cases)



Standard Ball Guide Rails made of steel

# Product Description, Ball Guide Rails SNS

## Characteristic features

- Top rigidity in all load directions
- High torque load capacity

## Proven cover strip for ball guide rail mounting holes

- A single cover for all holes – saves time and money
- Made of corrosion-resistant spring steel per EN 10088
- Easy, secure mounting
- Clip on and fasten

## Ball guide rails with cover strip and aluminum strip clamps

- Without threaded holes at the end faces (not required)

## Ball guide rails with cover strip and plastic screw-down protective end caps

- With threaded holes at the end faces

## Ball guide rails with plastic mounting hole plugs

## Ball guide rails with steel mounting hole plugs

## Ball guide rails for mounting from below



Definition		Code (example)		
Ball guide rail design style		S	N	S
Width	Slimline Wide	S		
Length	Normal		N	
Height	Standard height			S



# Ordering Examples

## Ordering ball guide rails in recommended lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

Options and part numbers											
Size	Ball guide rail with size	Accuracy class					Number of sections ..		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4$ mm	
		N	H	P	SP	UP	One-piece	Composite			
15	R1605 16	4	3	2	1	9	31, ...	3, ...	60	64	
20	R1605 86	4	3	2	1	9	31, ...	3, ...	60	64	
25	R1605 26	4	3	2	1	9	31, ...	3, ...	60	64	
30	R1605 76	4	3	2	1	9	31, ...	3, ...	80	48	
35	R1605 36	4	3	2	1	9	31, ...	3, ...	80	48	
45	R1605 46	4	3	2	1	9	31, ...	3, ...	105	36	
55	R1605 56	4	3	2	1	9	31, ...	3, ...	120	32	
65	R1605 66	4	3	2	1	9	31, ...	3, ...	150	25	
e.g.	R1605 76	3					31, 1676				

Excerpt from table with part numbers and recommended rail lengths for ordering example

### From the desired length to the recommended length

$$L = \left( \frac{L_W}{T} \right)^* \cdot T - 4$$

\* Round up the quotient  $L_W/T$  to the next whole number.

$L_W$  = desired length  
 $T$  = hole spacing

### Calculation example

$$L = \left( \frac{1660}{80 \text{ mm}} \right) \cdot 80 \text{ mm} - 4 \text{ mm}$$


$$L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 1676 \text{ mm}$$

### Notes on ordering examples

If the preferred dimension  $T_{1S}$  cannot be used:

- Select an end space  $T_1$  between  $T_{1S}$  and  $T_{1 \min}$ .
- Alternatively, select an end space between  $T_1$  and  $T_{1 \max}$ .

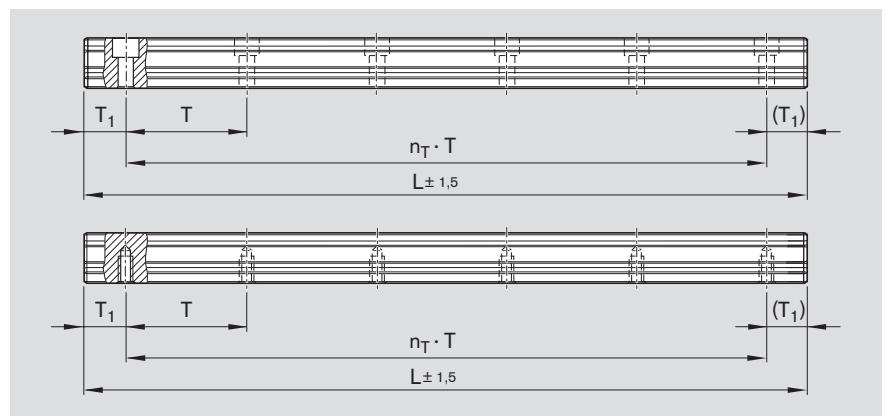

$$L = n_B \cdot T - 4 \text{ mm}$$

Basis: number of holes

$$L = n_T \cdot T + 2 \cdot T_{1S}$$

Basis: number of spaces between holes

$L$  = recommended rail length (mm)  
 $L_W$  = desired rail length (mm)  
 $T$  = hole spacing<sup>1)</sup> (mm)  
 $T_{1S}$  = preferred dimension<sup>1)</sup> (mm)  
 $n_B$  = number of holes (-)  
 $n_T$  = no. of spaces between holes (-)

1) For values, see dimensions table at dimension drawing.

### Ordering example 1 (up to $L_{\max}$ )

- Ball guide rail SNS size 30 with cover strip and strip clamps
- Accuracy class H
- Calculated rail length 1676 mm, (20 ·  $T_1$ , preferred dimension  $T_{1S} = 38$  mm; number of holes  $n_B = 21$ )

### Ordering data

Part number, rail length (mm)  
 $T_1 / n_T \cdot T / T_1$  (mm)

**R1605 733 31, 1676 mm**  
**38 / 20 · 80 / 38 mm**

### Ordering example 2 (over $L_{\max}$ )

- Ball guide rail SNS size 30 with cover strip and strip clamps
- Accuracy class H
- Calculated rail length 5116 mm, 2 sections (63 ·  $T_1$ , preferred dimension  $T_{1S} = 38$  mm; number of holes  $n_B = 64$ )

### Ordering data

Part number and number of sections, rail length (mm)  
 $T_1 / n_T \cdot T / T_1$  (mm)

**R1605 733 32, 5116 mm**  
**38 / 63 · 80 / 38 mm**

For rail lengths greater than  $L_{\max}$ , Rexroth provides matching rail sections for end to end mounting.



Standard Ball Guide Rails made of steel

# SNS with Cover Strip and Strip Clamps

## R1605 .3. ... / R1605 .B. ...

For mounting from above, with cover strip made of corrosion-resistant spring steel per EN 10088 and strip clamps made of aluminum (without threaded mounting holes on end face)

**Note on installation**

- Secure the cover strip!
- Strip clamps are included in the supply scope.
- Follow the mounting instructions! Send for the publications "Mounting Instructions for Ball Rail Systems" and "Mounting Instructions for the Cover Strip."
- Composite guide rails also available.

**Further Ball Guide Rails SNS and accessories**

- Corrosion-resistant Ball Guide Rails Resist NR ☞ 132 Resist CR ☞ 134
- Cover strip ☞ 176
- Strip clamps ☞ 178

**Ball guide rail R1605 .B. ... with flat underside for mounting on components made of cast mineral materials**

- In size 25 - 45 and accuracy class P and SP available on request.



**Options and part numbers**

Size	Ball guide rail with size	Accuracy class					Number of sections ., Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$		
		N	H	P	SP	UP	One-piece	Composite		Maximum number of holes $n_B$		
15	R1605 13	4	3	2	1	9	31, ...	3, ...	60	64		
20	R1605 83	4	3	2	1	9	31, ...	3, ...	60	64		
25	R1605 23	4	3	2	1	9	31, ...	3, ...	60	64		
30	R1605 73	4	3	2	1	9	31, ...	3, ...	80	48		
35	R1605 33	4	3	2	1	9	61, ...	6, ...	80	48		
45	R1605 43	4	3	2	1	9	61, ...	6, ...	105	36		
55	R1605 53	4	3	2	1	9	61, ...	6, ...	120	32		
65	R1605 63	4	3	2	1	9	61, ...	6, ...	150	25		
e.g.	R1605 73	3					31, 1676					

**Ordering example 1:**

(up to  $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1605 733 31, 1676 mm

**Ordering example 2:**

(over  $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- **2 sections**
- Rail length  $L = 5116 \text{ mm}$

Part number:

R1605 733 32, 5116 mm

**Ordering example 3:**

(up to  $L_{max}$ , with flat underside)


Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1605 7B3 31, 1676 mm

## Ball Guide Rails SNS

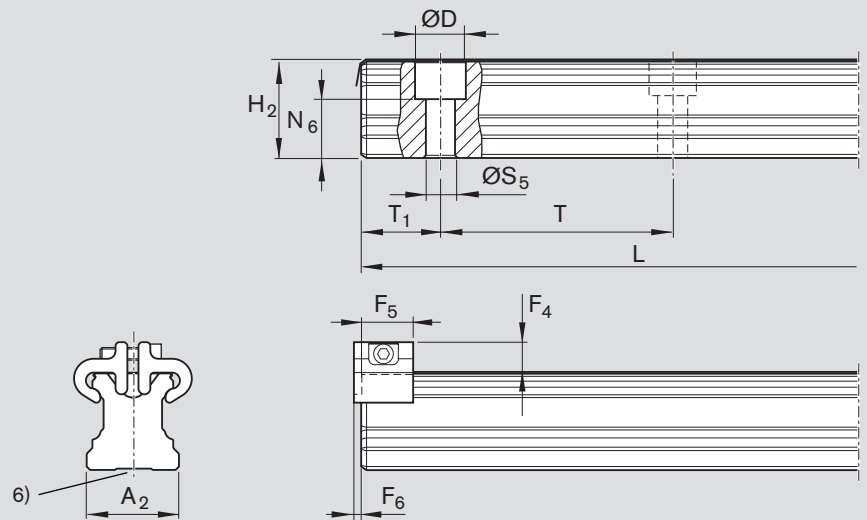

Size	Dimensions (mm)													Weight (kg/m)
	A <sub>2</sub>	D	F <sub>4</sub> <sup>3)</sup>	F <sub>5</sub>	F <sub>6</sub>	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub> <sup>2)</sup>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>5</sub>	T	T <sub>1 min</sub> <sup>4)</sup>	T <sub>1S</sub> <sup>5)</sup>	T <sub>1 max</sub>	
15	15	7.4	7.3	12	2.0	16.30	3 836	10.3	4.4	60	12	28.0	50	1.4
20	20	9.4	7.1	12	2.0	20.75	3 836	13.2	6.0	60	13	28.0	50	2.4
25	23	11.0	8.2	13	2.0	24.45	3 836	15.2	7.0	60	13	28.0	50	3.2
30	28	15.0	8.7	13	2.0	28.55	3 836	17.0	9.0	80	16	38.0	68	5.0
35	34	15.0	11.7	16	2.2	32.15	3 836	20.5	9.0	80	16	38.0	68	6.8
45	45	20.0	12.5	18	2.2	40.15	3 776	23.5	14.0	105	18	50.5	89	10.5
55	53	24.0	14.0	17	3.2	48.15	3 836	29.0	16.0	120	20	58.0	102	16.2
65	63	26.0	15.0	17	3.2	60.15	3 746	38.5	18.0	150	21	73.0	130	22.4

- 1) Dimension H<sub>2</sub> with cover strip  
 Size 15 with 0.1 mm cover strip  
 Size 20 - 30 with 0.2 mm cover strip  
 Size 35 - 65 with 0.3 mm cover strip
- 2) For size 20 - 45 in accuracy class N, H and P, one-piece guide rails are available on request up to the following lengths:  
 Size 20 - 25: up to 5816 mm  
 Size 30 - 35: up to 5836 mm  
 Size 45: up to 5771 mm
- 3) Dimension F<sub>4</sub> with cover strip
- 4) For end spaces below T<sub>1 min</sub>, no threaded holes in end faces possible. Cover strip fastening 178.
- 5) Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.
- 6) For manufacturing reasons, ball guide rails may have a flat underside (without groove).

Standard Ball Guide Rails made of steel

# SNS with Cover Strip and Protective End Caps

## R1605 .6. ... / R1605 .D. ...

For mounting from above, with cover strip made of corrosion-resistant spring steel per EN 10088 and screw-down plastic protective end caps (with threaded mounting holes on end face)

### Note on installation


- Secure the cover strip!
- Protective caps with screws and washers included in scope of supply.
- Follow the mounting instructions!
- Send for the publications "Mounting Instructions for Ball Rail Systems" and "Mounting Instructions for the Cover Strip."
- Composite guide rails also available.

### Further Ball Guide Rails SNS and accessories

- Cover strip ☞ 176
- Protective caps ☞ 178

### Ball guide rail R1605 .B. ... with flat underside for mounting on components made of cast mineral materials

- In size 25 - 45 and accuracy class P and SP available on request.

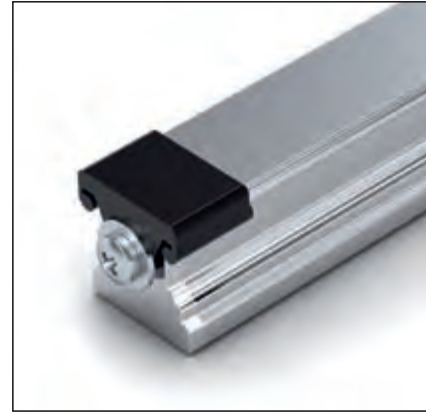

### Options and part numbers

Size	Ball guide rail with size	Accuracy class					Number of sections „ Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$		
		N	H	P	SP	UP	One-piece	Composite		Maximum number of holes $n_B$		
15	R1605 16	4	3	2	1	9	31, ...	3, ...	60	64		
20	R1605 86	4	3	2	1	9	31, ...	3, ...	60	64		
25	R1605 26	4	3	2	1	9	31, ...	3, ...	60	64		
30	R1605 76	4	3	2	1	9	31, ...	3, ...	80	48		
35	R1605 36	4	3	2	1	9	61, ...	6, ...	80	48		
45	R1605 46	4	3	2	1	9	61, ...	6, ...	105	36		
55	R1605 56	4	3	2	1	9	61, ...	6, ...	120	32		
65	R1605 66	4	3	2	1	9	61, ...	6, ...	150	25		
e.g.	R1605 76	3					31, 1676					

#### Ordering example 1: (up to $L_{max}$ )

- Options:
- Ball Guide Rail SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Rail length  $L = 1676 \text{ mm}$
- Part number:  
R1605 763 31, 1676 mm


#### Ordering example 2: (over $L_{max}$ )

- Options:
- Ball Guide Rail SNS
  - Size 30
  - Accuracy class H
  - **2 sections**
  - Rail length  $L = 5116 \text{ mm}$
- Part number:  
R1605 763 32, 5116 mm

#### Ordering example 3: (up to $L_{max}$ , with flat underside)

- Options:
- Ball Guide Rail SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Rail length  $L = 1676 \text{ mm}$
- Part number:  
R1605 7D3 31, 1676 mm

## Ball Guide Rails SNS

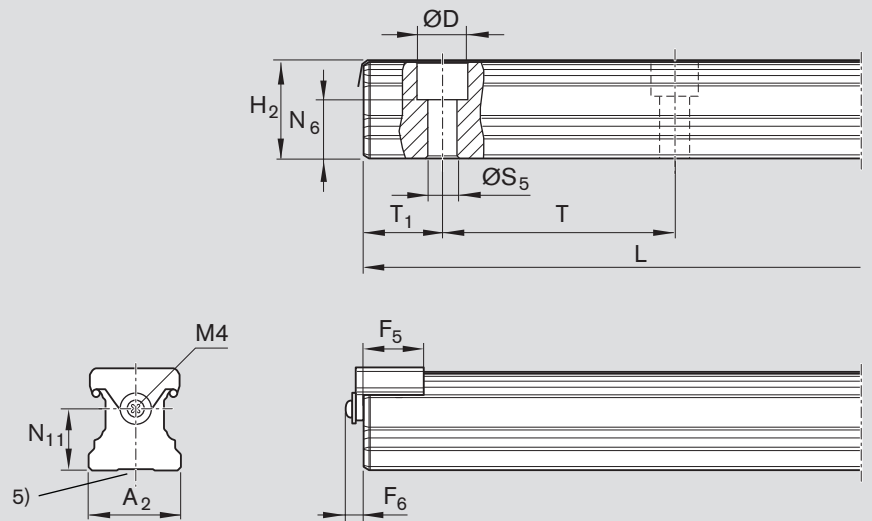

Size	Dimensions (mm)														Weight (kg/m)
	A <sub>2</sub>	D	F <sub>5</sub>	F <sub>6</sub>	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub> <sup>2)</sup>	N <sub>6</sub> <sup>±0.5</sup>	N <sub>11</sub>	S <sub>5</sub>	T	T <sub>1min</sub> <sup>3)</sup>	T <sub>1S</sub> <sup>4)</sup>	T <sub>1max</sub>		
15	15	7.4	14.0	6.5	16.30	3 836	10.3	9.8	4.4	60	12	28.0	50	1.4	
20	20	9.4	14.0	6.5	20.75	3 836	13.2	13.0	6.0	60	13	28.0	50	2.4	
25	23	11.0	15.2	6.5	24.45	3 836	15.2	15.0	7.0	60	13	28.0	50	3.2	
30	28	15.0	15.2	7.0	28.55	3 836	17.0	18.0	9.0	80	16	38.0	68	5.0	
35	34	15.0	18.0	7.0	32.15	3 836	20.5	22.0	9.0	80	16	38.0	68	6.8	
45	45	20.0	20.0	7.0	40.15	3 776	23.5	30.0	14.0	105	18	50.5	89	10.5	
55	53	24.0	20.0	7.0	48.15	3 836	29.0	30.0	16.0	120	20	58.0	102	16.2	
65	63	26.0	20.0	7.0	60.15	3 746	38.5	40.0	18.0	150	21	73.0	130	22.4	

- 1) Dimension H<sub>2</sub> with cover strip  
 Size 15 with 0.1 mm cover strip  
 Size 20 - 30 with 0.2 mm cover strip  
 Size 35 - 65 with 0.3 mm cover strip
- 2) For size 20 - 45 in accuracy class N, H and P, one-piece guide rails are available on request up to the following lengths:  
 Size 20 - 25: up to 5816 mm  
 Size 30 - 35: up to 5836 mm  
 Size 45: up to 5771 mm
- 3) For end spaces below T<sub>1min</sub><sup>1</sup>, no threaded holes in end faces possible. Cover strip fastening 178.
- 4) Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.
- 5) For manufacturing reasons, ball guide rails may have a flat underside (without groove).

Standard Ball Guide Rails made of steel

# SNS with Plastic Mounting Hole Plugs




## R1605 .0. ... / R1605 .C. ...

For mounting from above, with plastic mounting hole plugs

**Note on installation**


- Plastic mounting hole plugs included in scope of supply.
- Follow the mounting instructions!
- Send for the publication "Mounting Instructions for Ball Rail Systems."
- Composite guide rails also available.

**Further Ball Guide Rails SNS and accessories**

- Corrosion-resistant Ball Guide Rails Resist NR  133 Resist CR  135
- Plastic Mounting Hole Plugs  179

**Ball guide rail R1605 .B. ... with flat underside for mounting on components made of cast mineral materials**

- In size 25 - 45 and accuracy class P and SP available on request.

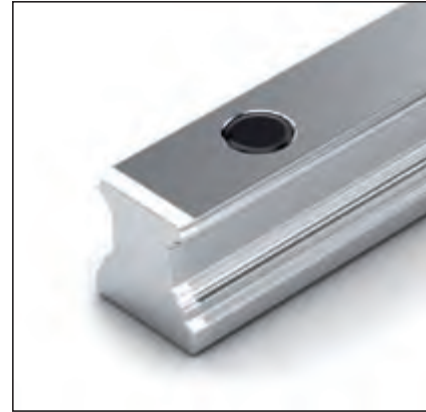

**Options and part numbers**

Size	Ball guide rail with size	Accuracy class					Number of sections ., Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$		
		N	H	P	SP	UP	One-piece	Composite		Maximum number of holes $n_B$		
15	R1605 10	4	3	2	1	9	31, ...	3, ...	60	64		
20	R1605 80	4	3	2	1	9	31, ...	3, ...	60	64		
25	R1605 20	4	3	2	1	9	31, ...	3, ...	60	64		
30	R1605 70	4	3	2	1	9	31, ...	3, ...	80	48		
35	R1605 30	4	3	2	1	9	31, ...	3, ...	80	48		
45	R1605 40	4	3	2	1	9	31, ...	3, ...	105	36		
55	R1605 50	4	3	2	1	9	31, ...	3, ...	120	32		
65	R1605 60	4	3	2	1	9	31, ...	3, ...	150	25		
e.g.	R1605 70	3					31, 1676					

**Ordering example 1:**

(up to  $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length L = 1676 mm

Part number:

R1605 703 31, 1676 mm

**Ordering example 2:**

(over  $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- **2 sections**
- Rail length L = 5116 mm

Part number:

R1605 703 32, 5116 mm

**Ordering example 3:**

(up to  $L_{max}$ , with flat underside)


Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length L = 1676 mm

Part number:

R1605 7C3 31, 1676 mm

## Ball Guide Rails SNS

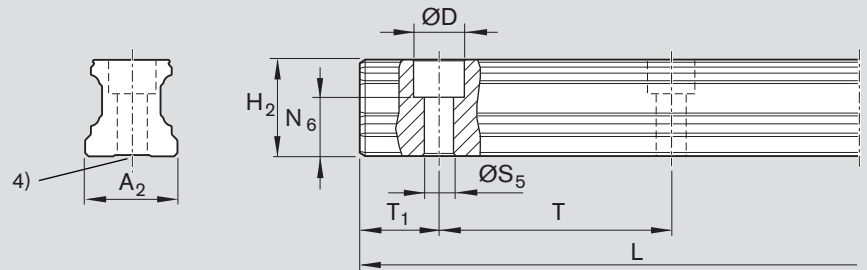

Size	Dimensions (mm)										Weight (kg/m)
	A <sub>2</sub>	D	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub> <sup>2)</sup>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>5</sub>	T	T <sub>1 min</sub>	T <sub>1S</sub> <sup>3)</sup>	T <sub>1 max</sub>	
15	15	7.4	16.20	3 836	10.3	4.4	60	10	28.0	50	1.4
20	20	9.4	20.55	3 836	13.2	6.0	60	10	28.0	50	2.4
25	23	11.0	24.25	3 836	15.2	7.0	60	10	28.0	50	3.2
30	28	15.0	28.35	3 836	17.0	9.0	80	12	38.0	68	5.0
35	34	15.0	31.85	3 836	20.5	9.0	80	12	38.0	68	6.8
45	45	20.0	39.85	3 776	23.5	14.0	105	16	50.5	89	10.5
55	53	24.0	47.85	3 836	29.0	16.0	120	18	58.0	102	16.2
65	63	26.0	59.85	3 746	38.5	18.0	150	20	73.0	130	22.4

1) Dimension H<sub>2</sub> without cover strip

2) For size 20 - 45 in accuracy class N, H and P, one-piece guide rails are available on request up to the following lengths:

Size 20 - 25: up to 5816 mm

Size 30 - 35: up to 5836 mm

Size 45: up to 5771 mm

3) Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.

4) For manufacturing reasons, ball guide rails may have a flat underside (without groove).

Standard Ball Guide Rails made of steel

## SNS with Steel Mounting Hole Plugs

### R1606 .5. ..


For mounting from above,  
for steel mounting hole plugs

#### Note on installation

- Steel mounting hole plugs not included in scope of supply.
- Follow the mounting instructions!
- Send for the publication “Mounting Instructions for Ball Rail Systems.”
- Composite guide rails also available.

Further Ball Guide Rails SNS and accessories

- Steel mounting hole plugs ☞ 179
- Mounting tool for steel mounting hole plugs ☞ 179

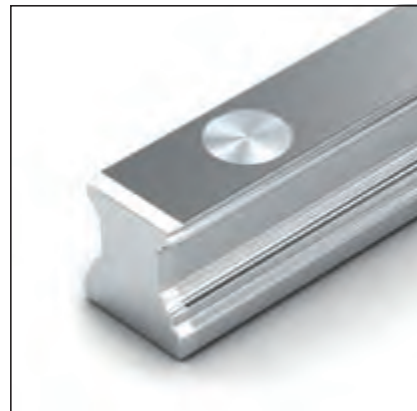

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class					Number of sections „ Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$		
		N	H	P	SP	UP	One-piece	Composite		Maximum number of holes $n_B$		
25	R1606 25	4	3	2	1	9	31, ...	3, ...	60	64		
30	R1606 75	4	3	2	1	9	31, ...	3, ...	80	48		
35	R1606 35	4	3	2	1	9	31, ...	3, ...	80	48		
45	R1606 45	4	3	2	1	9	31, ...	3, ...	105	36		
55	R1606 55	4	3	2	1	9	31, ...	3, ...	120	32		
65	R1606 65	4	3	2	1	9	31, ...	3, ...	150	25		
e.g.	R1606 75	3					31, 1676					

#### Ordering example 1: (up to $L_{\max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1606 753 31, 1676 mm

#### Ordering example 2: (over $L_{\max}$ )


Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- **2 sections**
- Rail length  $L = 5116 \text{ mm}$

Part number:

R1606 753 32, 5116 mm

## Ball Guide Rails SNS

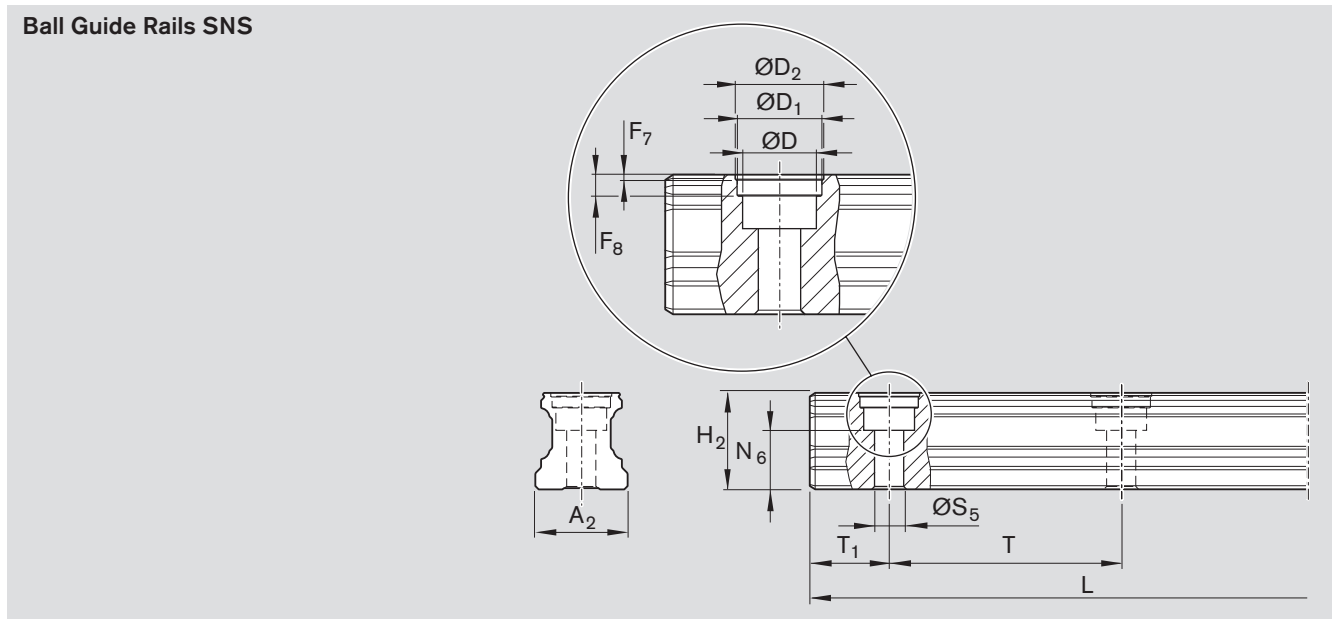

Size	Dimensions (mm)														Weight (kg/m)
	A <sub>2</sub>	D	D <sub>1</sub>	D <sub>2</sub>	F <sub>7</sub>	F <sub>8</sub>	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub> <sup>2)</sup>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>5</sub>	T	T <sub>1 min</sub>	T <sub>1S</sub> <sup>3)</sup>	T <sub>1 max</sub>	
25	23	11.0	12.55	13.0	0.90	3.7	24.25	3 836	15.2	7.0	60	13	28.0	50	3.2
30	28	15.0	17.55	18.0	0.90	3.6	28.35	3 836	17.0	9.0	80	16	38.0	68	5.0
35	34	15.0	17.55	18.0	0.90	3.6	31.85	3 836	20.5	9.0	80	16	38.0	68	6.8
45	45	20.0	22.55	23.0	1.45	8.0	39.85	3 776	23.5	14.0	105	18	50.5	89	10.5
55	53	24.0	27.55	28.0	1.45	8.0	47.85	3 836	29.0	16.0	120	20	58.0	102	16.2
65	63	26.0	29.55	30.0	1.45	8.0	59.85	3 746	38.5	18.0	150	21	73.0	130	22.4

1) Dimension H<sub>2</sub> without cover strip

2) For size 25 - 45 in accuracy class N, H and P, one-piece guide rails are available on request up to the following lengths:

Size 25: up to 5816 mm

Size 30 - 35: up to 5836 mm

Size 45: up to 5771 mm

3) Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.



Standard Ball Guide Rails made of steel

# SNS for mounting from below

## R1607 .0. ..


For mounting from below

**Note on installation**

- Follow the mounting instructions!
- Send for the publication "Mounting Instructions for Ball Rail Systems."
- Composite guide rails also available.

**Further Ball Guide Rails SNS and accessories**

- Corrosion-resistant Ball Guide Rails Resist NR ☞ 133
- Resist CR ☞ 135

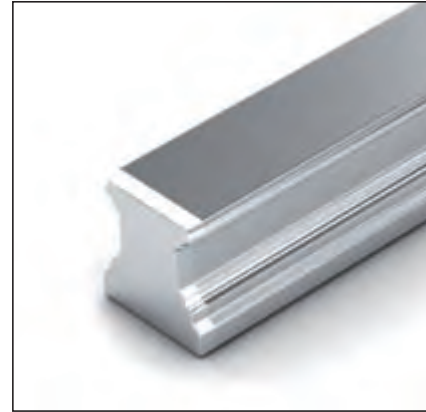

**Options and part numbers**

Size	Ball guide rail with size	Accuracy class					Number of sections ., Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$		
		N	H	P	SP	UP	One-piece	Composite		Maximum number of holes $n_B$		
15	R1607 10	4	3	2	1	9	31, ...	3, ...	60	64		
20	R1607 80	4	3	2	1	9	31, ...	3, ...	60	64		
25	R1607 20	4	3	2	1	9	31, ...	3, ...	60	64		
30	R1607 70	4	3	2	1	9	31, ...	3, ...	80	48		
35	R1607 30	4	3	2	1	9	31, ...	3, ...	80	48		
45	R1607 40	4	3	2	1	9	31, ...	3, ...	105	36		
55	R1607 50	4	3	2	1	9	31, ...	3, ...	120	32		
65	R1607 60	4	3	2	1	9	31, ...	3, ...	150	25		
e.g.	R1607 70	3					31, 1676					

**Ordering example 1:**

(up to  $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length L = 1676 mm

Part number:

R1607 703 31, 1676 mm

**Ordering example 2:**

(over  $L_{max}$ )


Options:

- Ball Guide Rail SNS
- Size 30
- Accuracy class H
- **2 sections**
- Rail length L = 5116 mm

Part number:

R1607 703 32, 5116 mm

## Ball Guide Rails SNS

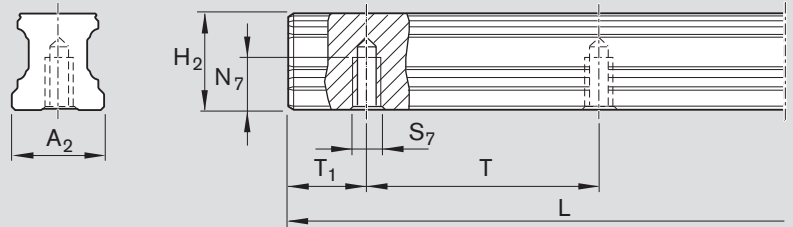

Size	Dimensions (mm)									Weight (kg/m)
	A <sub>2</sub>	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub> <sup>2)</sup>	N <sub>7</sub>	S <sub>7</sub>	T	T <sub>1min</sub>	T <sub>1S</sub> <sup>3)</sup>	T <sub>1max</sub>	
15	15	16.20	3 836	7.5	M5	60	10	28.0	50	1.4
20	20	20.55	3 836	9.0	M6	60	10	28.0	50	2.4
25	23	24.25	3 836	12.0	M6	60	10	28.0	50	3.2
30	28	28.35	3 836	15.0	M8	80	12	38.0	68	5.0
35	34	31.85	3 836	15.0	M8	80	12	38.0	68	6.8
45	45	39.85	3 776	19.0	M12	105	16	50.5	89	10.5
55	53	47.85	3 836	22.0	M14	120	18	58.0	102	16.2
65	63	59.85	3 746	25.0	M16	150	20	73.0	130	22.4

1) Dimension H<sub>2</sub> without cover strip

2) For size 20 - 45 in accuracy class N, H and P, one-piece guide rails are available on request up to the following lengths:

Size 20 - 25: up to 5816 mm

Size 30 - 35: up to 5836 mm

Size 45: up to 5771 mm

3) Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.

Corrosion-Resistant Ball Guide Rails

# Product Description, Resist NR II

## General notes on Ball Guide Rails in Resist NR II

For part numbers, see the following pages. For recommended rail lengths, dimensions and weights, please refer to the corresponding standard steel guide rails ☞ 122 – 131.

Follow the mounting instructions! Send for the publications “Mounting Instructions for Ball Rail Systems” and “Mounting Instructions for the Cover Strip.”

## Corrosion resistance and conditions of use

Ball Guide Rails Resist NR II and all steel parts are made of corrosion-resistant steel per EN 10088, with aluminum strip clamps. They are specifically intended for use in applications involving aqueous media, very dilute acids, alkalis or salt solutions. These guides are particularly suitable for environments with a relative humidity of over 70% and temperatures above 30 °C. Conditions like these are found above all in cleaning systems, galvanization and pickling lines, steam degreasing systems, and also cooling equipment. Since they have built-in corrosion protection, Ball Rail Systems Resist NR II are also ideal for use in clean rooms and for general printed circuit board assembly. Other application areas include the pharmaceuticals and food industries.

## Recommended runner blocks for Ball Guide Rails Resist NR II

– Ball Runner Blocks, Resist NR II ☞ 104

## Combinations of different accuracy classes



Combining ball guide rails and runner blocks of different accuracy classes results in different tolerances for dimensions H and A<sub>3</sub>. (“Accuracy classes and their tolerances” ☞ 26)

# Ball Guide Rails, Resist NR II

## R2045 .3. ..., SNS for mounting from above, with cover strip and strip clamps

### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections ., Rail length L (mm), ...	
		N	H	P	One-piece	Composite
15 <sup>1)</sup>	R2045 13	4	3	2	31, ...	3., ...
20	R2045 83	4	3	2	31, ...	3., ...
25	R2045 23	4	3	2	31, ...	3., ...
30	R2045 73	4	3	2	31, ...	3., ...
35	R2045 33	4	3	2	61, ...	6., ...
e.g.	R2045 73		3		31, 1676	



1) Maximum rail length 1856 mm, maximum number of holes n<sub>B</sub> 30

### Note on installation

- Secure the cover strip!
- Strip clamps are included in the supply scope.
- Composite guide rails also available.

### Accessories

- Cover strip ☞ 176
- Strip clamps ☞ 178

### Recommended rail lengths, dimension drawing, dimensions and weights ☞ 122 – 123.

### Ordering example 1 (up to L<sub>max</sub>)

- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Rail length L = 1676 mm
- Part number:  
R2045 733 31, 1676 mm

### Ordering example 2 (over L<sub>max</sub>)

- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - **2 sections**
  - Rail length L = 5116 mm
- Part number:  
R2045 733 32, 5116 mm

## Ball Guide Rails, Resist NR II

### R2045 .0. ..., SNS for mounting from above, with plastic mounting hole plugs

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections „ Rail length L (mm), ...	
		N	H	P	One-piece	Composite
15 <sup>1)</sup>	R2045 10	4	3	2	31, ...	3, ...
20	R2045 80	4	3	2	31, ...	3, ...
25	R2045 20	4	3	2	31, ...	3, ...
30	R2045 70	4	3	2	31, ...	3, ...
35	R2045 30	4	3	2	31, ...	3, ...
e.g.	R2045 70	3			31, 1676	

#### Note on installation

- Plastic mounting hole plugs included in scope of supply.
- Composite guide rails also available.

#### Accessories


- Plastic mounting hole plugs  
☞ 179

#### Recommended rail lengths, dimension drawing, dimensions and weights

☞ 126 – 127.

#### Ordering example 1 (up to $L_{max}$ )

- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Rail length  $L = 1676$  mm
- Part number:  
R2045 703 31, 1676 mm

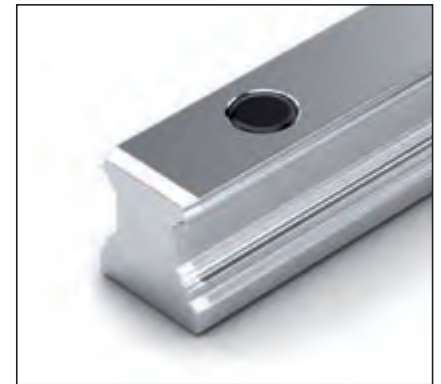

#### Ordering example 2 (over $L_{max}$ )

- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - **2 sections**
  - Rail length  $L = 5116$  mm
- Part number:  
R2045 703 32, 5116 mm

### R2047 .0. ..., SNS for mounting from below

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections „ Rail length L (mm), ...	
		N	H	P	One-piece	Composite
15 <sup>1)</sup>	R2047 10	4	3	2	31, ...	3, ...
20	R2047 80	4	3	2	31, ...	3, ...
25	R2047 20	4	3	2	31, ...	3, ...
30	R2047 70	4	3	2	31, ...	3, ...
35	R2047 30	4	3	2	31, ...	3, ...
e.g.	R2047 70	3			32, 5116	

1) Maximum rail length 1856 mm, maximum number of holes  $n_B = 30$

#### Note on installation

- Composite guide rails also available.

#### Recommended rail lengths, dimension drawing, dimensions and weights


☞ 130 – 131.

#### Ordering example 1 (up to $L_{max}$ )

- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Rail length  $L = 1676$  mm
- Part number:  
R2047 703 31, 1676 mm

#### Ordering example 2 (over $L_{max}$ )


- Options:
- Ball Guide Rail NR II, SNS
  - Size 30
  - Accuracy class H
  - **2 sections**
  - Rail length  $L = 5116$  mm
- Part number:  
R2047 703 32, 5116 mm

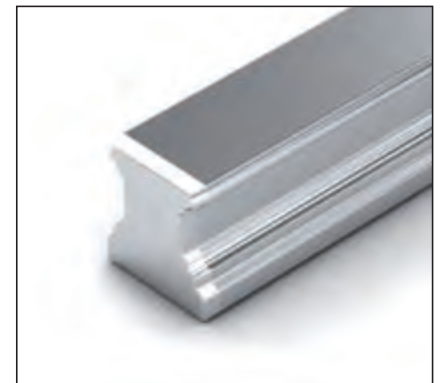

Corrosion-Resistant Ball Guide Rails

# Product Description, Resist CR

## General notes on Ball Guide Rails in Resist CR

For part numbers, see the following pages. For recommended rail lengths, dimensions and weights, please refer to the corresponding standard steel guide rails  122 – 131.

Follow the mounting instructions! Send for the publications “Mounting Instructions for Ball Rail Systems” and “Mounting Instructions for the Cover Strip.”

### Corrosion-resistant coating Resist CR

Ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating.

### One-piece guide rails with uncoated or coated end faces

- End faces **uncoated**
  - End faces, chamfers and end-face threads **coated**
- Part numbers:  
 - R16.. ... 31 or R16.. ... 61
- Part numbers:  
 - R16.. ... 41 or R16.. ... 71

### Composite guide rails with coated end faces


- End faces, chamfers and end-face threads coated, part numbers:  
 - R16.. ... 41 or R16.. ... 71
- Composite ball guide rails are chamfered on both sides at the joints.

### Recommended ball runner blocks for Resist CR guide rails in accuracy class H for preload classes C0 and C1

- Size 15 - 65
- Accuracy class H
  - **Preload class C0** = without preload
- Size 30 - 65
- Accuracy class H
  - **Preload class C1** = 2% C

### Combinations of different accuracy classes



Combining ball guide rails and runner blocks of different accuracy classes results in different tolerances for dimensions H and A<sub>3</sub>. (“Accuracy classes and their tolerances”  26)

# Ball Guide Rails, Resist CR

## R1645 .3. ..., SNS for mounting from above, with cover strip and strip clamps

### Options and part numbers

Size	Ball guide rail with size	Accuracy class	Number of sections .. Rail length L (mm), ....			
			H	One-piece Uncoated end faces	Coated end faces	Composite Coated end faces
15	R1645 13		3	31, ....	41, ....	4, ....
20	R1645 83		3	31, ....	41, ....	4, ....
25	R1645 23		3	31, ....	41, ....	4, ....
30	R1645 73		3	31, ....	41, ....	4, ....
35	R1645 33		3	61, ....	71, ....	7, ....
45	R1645 43		3	61, ....	71, ....	7, ....
55	R1645 53		3	61, ....	71, ....	7, ....
65	R1645 63		3	61, ....	71, ....	7, ....
e.g.	R1645 73		3	31, 1676		





### Note on installation

- Secure the cover strip!
- Strip clamps are included in scope of supply.
- Composite guide rails also available.

### Recommended rail lengths, dimension drawing, dimensions and weights

 122 – 123.

### Accessories

- Cover strip  176
- Strip clamps  178

### Ordering example 1 (up to L<sub>max</sub>)

- Options:
- Ball Guide Rail CR, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Uncoated end faces
  - Rail length L = 1676 mm
- Part number:  
 R1645 733 31, 1676 mm

### Ordering example 2 (over L<sub>max</sub>)


- Options:
- Ball Guide Rail CR, SNS
  - Size 30
  - Accuracy class H
  - **2 sections**
  - Coated end faces
  - Rail length L = 5116 mm
- Part number:  
 R1645 733 42, 5116 mm

## Ball Guide Rails, Resist CR

### R1645 .0. ..., SNS for mounting from above, with plastic mounting hole plugs

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class	Number of sections .. Rail length L (mm), ....			
			One-piece Uncoated end faces	Coated end faces	Composite Coated end faces	
		H				
15	R1645 10		3	31, ....	41, ....	4, ....
20	R1645 80		3	31, ....	41, ....	4, ....
25	R1645 20		3	31, ....	41, ....	4, ....
30	R1645 70		3	31, ....	41, ....	4, ....
35	R1645 30		3	31, ....	41, ....	4, ....
45	R1645 40		3	31, ....	41, ....	4, ....
55	R1645 50		3	31, ....	41, ....	4, ....
65	R1645 60		3	31, ....	41, ....	4, ....
e.g.	R1645 70		3	31, 1676		

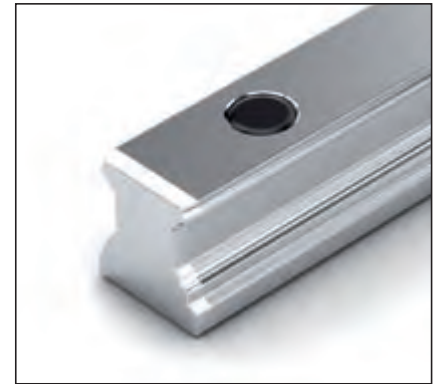

#### Note on installation

- Plastic mounting hole plugs included in scope of supply.
- Composite guide rails also available.

#### Recommended rail lengths, dimension drawing, dimensions and weights

☞ 126 – 127.

#### Accessories

- Plastic mounting hole plugs  
☞ 179

#### Ordering example 1 (up to $L_{max}$ )

- Options:
- Ball Guide Rail CR, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Uncoated end faces
  - Rail length L = 1676 mm

Part number:

R1645 703 31, 1676 mm

#### Ordering example 2 (over $L_{max}$ )

Options:

- Ball Guide Rail CR, SNS
- Size 30
- Accuracy class H
- **2 sections**
- Coated end faces
- Rail length L = 5116 mm


Part number:

R1645 703 42, 5116 mm

### R1647 .0. ..., SNS for mounting from below

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class	Number of sections .. Rail length L (mm), ....			
			One-piece Uncoated end faces	Coated end faces	Composite Coated end faces	
		H				
15	R1647 10		3	31, ....	41, ....	4, ....
20	R1647 80		3	31, ....	41, ....	4, ....
25	R1647 20		3	31, ....	41, ....	4, ....
30	R1647 70		3	31, ....	41, ....	4, ....
35	R1647 30		3	31, ....	41, ....	4, ....
45	R1647 40		3	31, ....	41, ....	4, ....
55	R1647 50		3	31, ....	41, ....	4, ....
65	R1647 60		3	31, ....	41, ....	4, ....
e.g.	R1647 70		3			42, 5116

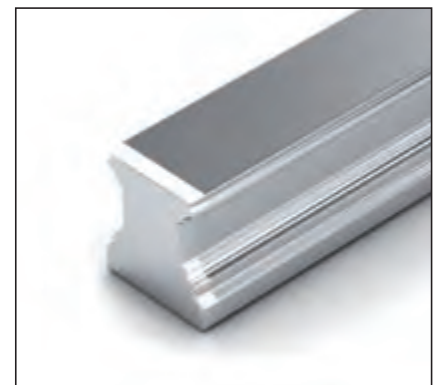

#### Note on installation

- Composite guide rails also available.

#### Recommended rail lengths, dimension drawing, dimensions and weights

☞ 130 – 131

#### Ordering example 1 (up to $L_{max}$ )

- Options:
- Ball Guide Rail CR, SNS
  - Size 30
  - Accuracy class H
  - One-piece
  - Uncoated end faces
  - Rail length L = 1676 mm

Part number:

R1647 703 31, 1676 mm

#### Ordering example 2 (over $L_{max}$ )

Options:

- Ball Guide Rail CR, SNS
- Size 30
- Accuracy class H
- **2 sections**
- Coated end faces
- Rail length L = 5116 mm

Part number:

R1647 703 42, 5116 mm

## V-Guide Rails

## Product Description, V-Guide Rail SNS

## Characteristic features

Thanks to their mounting style, V-Guide Rails for Ball Rail Systems offer the following advantages:


- Reduced geometric variations in runner block travel, since there are no mounting holes in the guide rail
- Freely selectable ball guide rail length (not dependent on mounting holes)
- No need to drill and tap holes in the mounting base
- V-Guide Rails are especially suited for single-rail applications (mounting in aluminum profiles)
- Rail mounting recess can be designed into aluminum profiles – no extra effort required
- Rail mounting recess can be machined with standard profile milling tools
- Improved rail straightness due to absence of mounting holes
- No need for mounting hole plugs or covers
- V-Guide Rails can be mounted at lower cost
- Smooth rail surface for optimal sealing action
- Multiple-rail applications require milling of parallel rail seating

Thanks to Rexroth's proven policy of interchangeability, the entire range of ball runner blocks and accessories can be used.



## Comparison of Mounting Styles


## Ball rail system with standard ball guide rail

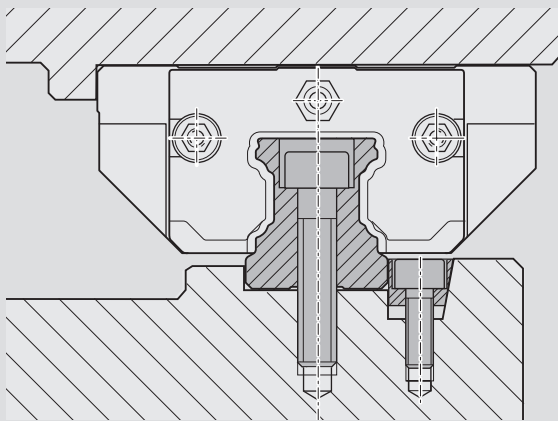

## Mounting of standard guide rail

The standard guide rail is pressed against the reference edge using clamping strips or wedge profiles to align it. The rail is screwed into place from above or below. Mounting holes in the standard guide rail are closed with a cover strip or plugs. Two rows of holes are needed in the machine bed for each standard guide rail.

## Ball rail system with V-guide rail

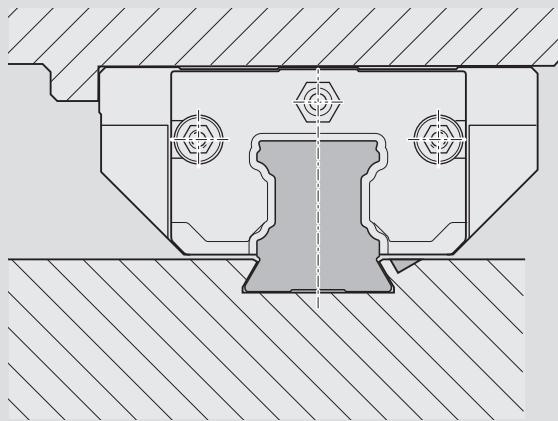

## Mounting of V-guide rail

The V-guide rail for ball rail systems has no mounting holes. It is installed by press-fitting it into mounting base. The mating cavity for the rail can be produced using a standard contour milling machine. It is not necessary to drill any holes.




## SNS without Mounting Holes

### R1608 .1. ..

Without mounting holes  
Press-fit mounting

#### Note on installation

- Composite ball guide rails also available.
- Combinable with all ball runner blocks.

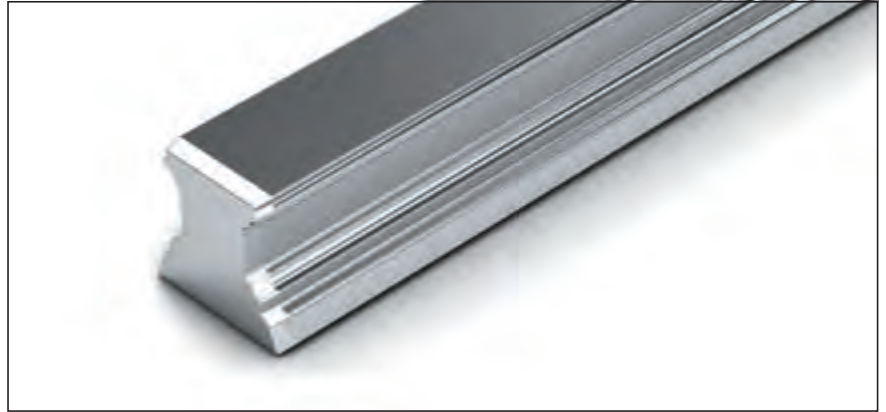

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class	Number of sections ., Rail length L (mm), ...		Rail length freely selectable up to $L_{max}$ (mm)
			N	One-piece Composite	
15	R1608 11		4	31, ...	3, ..., 3836
20	R1608 81		4	31, ...	3, ..., 3836
25	R1608 21		4	31, ...	3, ..., 3836
e.g.	R1608 21		4	31, 1676	

#### Ordering example 1 (up to $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 25
- Accuracy class N
- One-piece
- Rail length L = 1676 mm

Part number:

R1608 214 31, 1676 mm

#### Ordering example 2 (over $L_{max}$ )

Options:

- Ball Guide Rail SNS
- Size 25
- Accuracy class N
- **2 sections**
- Rail length L = 5116 mm

Part number:

R1608 214 32, 5116 mm




V-Guide Rails

# Mounting and Installation Tolerances


## Single-rail applications

For details regarding straightness and parallelism of the guide rail mounting surface, see 26.

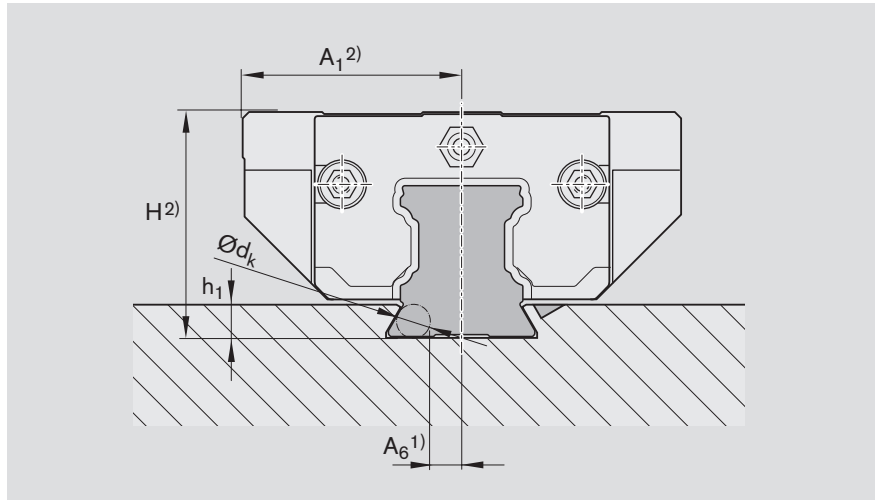

## Structural design of the rail mounting recess

Material recommended by Rexroth:  
Wrought aluminum alloy F22 to F27

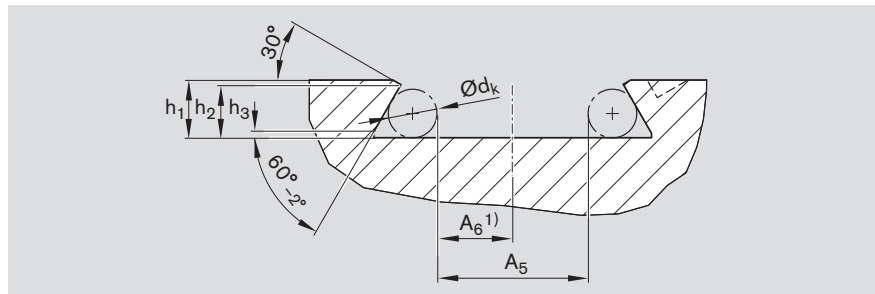

Size	Dimensions (mm)					
	$A_5^{\pm 0.2}$	$A_6^{1)}$	$h_1^{\pm 0.15}$	$h_2^{\pm 0.1}$	$h_3^{-0.2}$	$\text{Ø}d_k$
15	8.6	4.2	3.5	3.0	0.5	3.0
20	13.4	6.6	4.0	3.6	0.5	3.0
25	14.0	6.9	5.0	4.6	0.5	4.0


1) Tolerances of  $A_6 \hat{=} A_3$  see 26

2) For dimensions and tolerances, see the sections on Ball Runner Blocks

## Multiple-rail applications



For multiple-rail applications the rail seating must be machined into the mounting base.

For details regarding vertical offset and parallelism of the guide rail mounting surfaces, see 240 – 242.

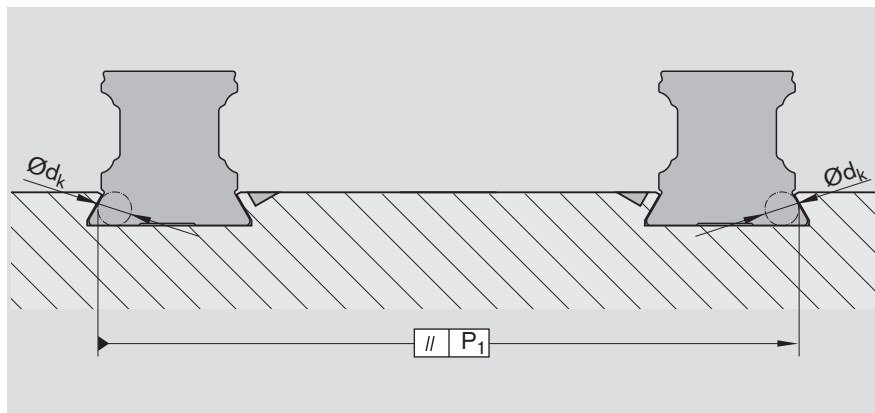

**Recommended installation procedure**

 Do not press in manually!

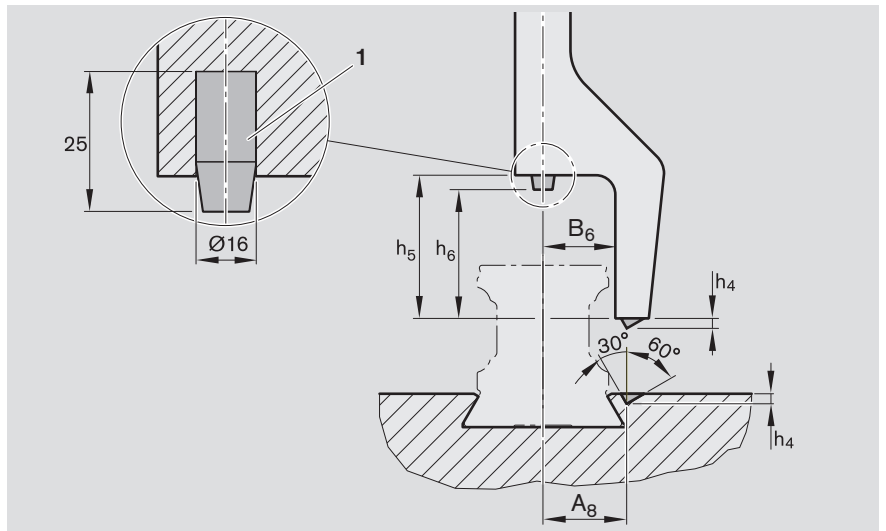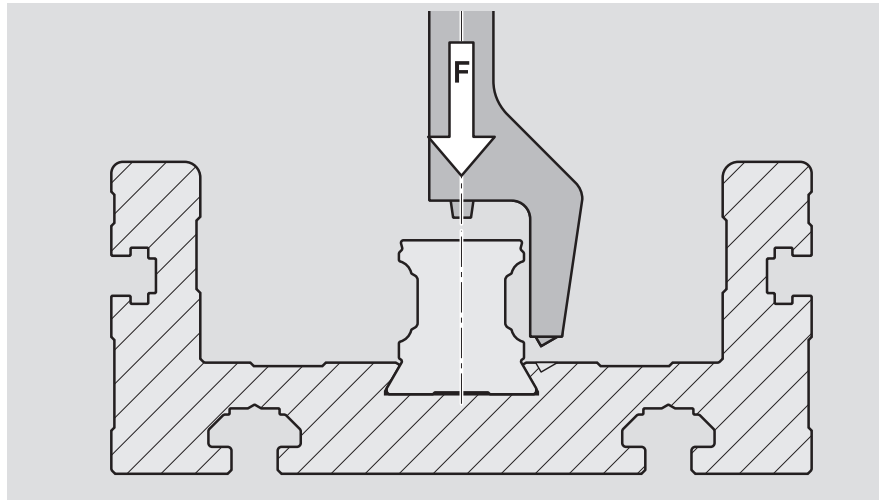


1) Example: Use rubber buffers as contact points while pressing the guide rail in.

Material: PUR  
Hardness: 90±5 Shore A

Size	Dimensions (mm)					Pressing force (kN)
	A <sub>8</sub>	B <sub>6</sub>	h <sub>4</sub>	h <sub>5</sub>	h <sub>6</sub>	
15	9.5	8	1.3	14	9.5	27
20	12.0	10	1.8	18	12.8	30
25	14.0	11	2.0	21	15.3	33

**Recommended values for all sizes**

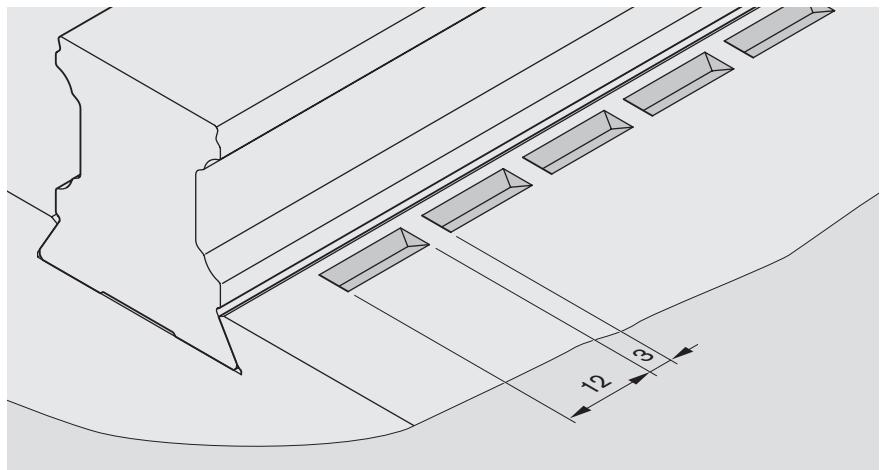

Wide Ball Rail Systems made of steel and Resist CR

## Product Description, Ball Runner Blocks BNS, CNS

### Characteristic features

- Limitless interchangeability; all ball guide rail versions can be combined at will with all ball runner block versions within each accuracy class
- Due to very high torsional moment load capacity and torsional rigidity, particularly suitable for single rail applications
- High torque load capacity
- Same load capability in all four main load directions
- Integrated all-round sealing
- Low noise level and best travel performance
- Excellent dynamic characteristics:  
Travel speed:  $v_{\max}$  up to 5 m/s<sup>1)</sup>  
Acceleration:  $a_{\max}$  up to 500 m/s<sup>2</sup><sup>1)</sup>
- Long-term lubrication, up to several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- Lube ports with metal threads on all sides<sup>1)</sup>
- Optimum system rigidity through preloaded O-arrangement
- Extensive range of accessories

### Further highlights

- Optimized entry-zone geometry and high number of balls per track minimizes variation in elastic deflection
- Mounting threads provided on end faces for fixing of all add-on elements
- Guide with low clearance or slight preload
- Smooth, light running thanks to optimized ball recirculation and ball or ball chain guidance<sup>1)</sup>
- Attachments can be bolted to ball runner blocks from above or below<sup>1)</sup>
- Improved rigidity under lift-off and side loading conditions when additional mounting screws are used in the two holes provided at the center of the runner block
- Ball runner blocks pre-lubricated in factory<sup>1)</sup>
- Available with ball chain as an option<sup>1)</sup>

### Corrosion protection (optional)

- Resist CR:  
Ball runner block body and ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating

### Note

- Size 20/40:  
New Ball Rail Systems with different ball diameters. Not interchangeable with previous size 20/40 versions!

1) depends on type

Overview of Wide Ball Runner Block models



New in sizes 20/40 and 25/70:

- Now also with ball chain
- Pre-lubricated
- Further sizes in preparation

Size 35/90

New in sizes 20/40 and 25/70:

- With ball chain
- Pre-lubricated
- Further sizes in preparation



- 1) Ball chain (optional)
- Optimizes noise levels

Definition Ball Runner Block design style		Code (example)		
		B	N	S
Width	Flanged	B	N	S
	Slimline			
	Wide			
	Compact			
Length	Normal	N	S	
	Long			
	Short			
Height	Standard height	N	S	
	High			
	Low			

Wide Ball Rail Systems made of steel and Resist CR

# BNS – Wide, normal, standard height

## Ball Runner Blocks made of steel R1671 ... 2.

### Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$   
 Acceleration:  $a_{max} = 500 \text{ m/s}^2$   
 (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

### Note on lubrication

– Pre-lubricated

### Further Ball Runner Blocks BNS

– See below for corrosion-resistant ball runner blocks

### Note

Can be used on all Ball Guide Rails BNS.



### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class			Seal for ball runner block			
		C0	C1	N	H	P	without ball chain		with ball chain	
							SS	DS	SS	DS
20/40 <sup>1)</sup>	R1671 5	9		4	3	–	20	–	22	–
			1	4	3	2	20	2Z	22	2Y
25/70	R1671 2	9		4	3	–	20	–	22	–
			1	4	3	2	20	2Z	22	2Y
e.g.	R1671 2		1		3		20			

### Ordering example

Options:

- Ball Runner Block BNS
- Size 25/70
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1671 213 20

## Ball Runner Blocks, Resist CR R1671 ... 7.

### Note on lubrication

– Pre-lubricated

### Note

Can be used on all Ball Guide Rails BNS.

### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class		Seal for ball runner block			
			C0	H	without ball chain		with ball chain	
					SS	DS	SS	DS
20/40 <sup>1)</sup>	R1671 5	9		3	70	7Z	72	7Y
25/70	R1671 2	9		3	70	7Z	72	7Y
e.g.	R1671 2	9		3	70			

### Ordering example

Options:

- Ball Runner Block BNS
- Size 25/70
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1671 293 70

### Preload classes

C0 = without preload  
 C1 = preload 2% C

### Seals


SS = standard seal  
 DS = double-lipped seal

### Key to table

Gray numbers  
 = version/combination not preferred  
 (longer delivery times in some cases)

1) Note: New Ball Runner Block not combinable with existing Ball Guide Rail R167. 8.. ..!

**Ball Runner Blocks BNS**

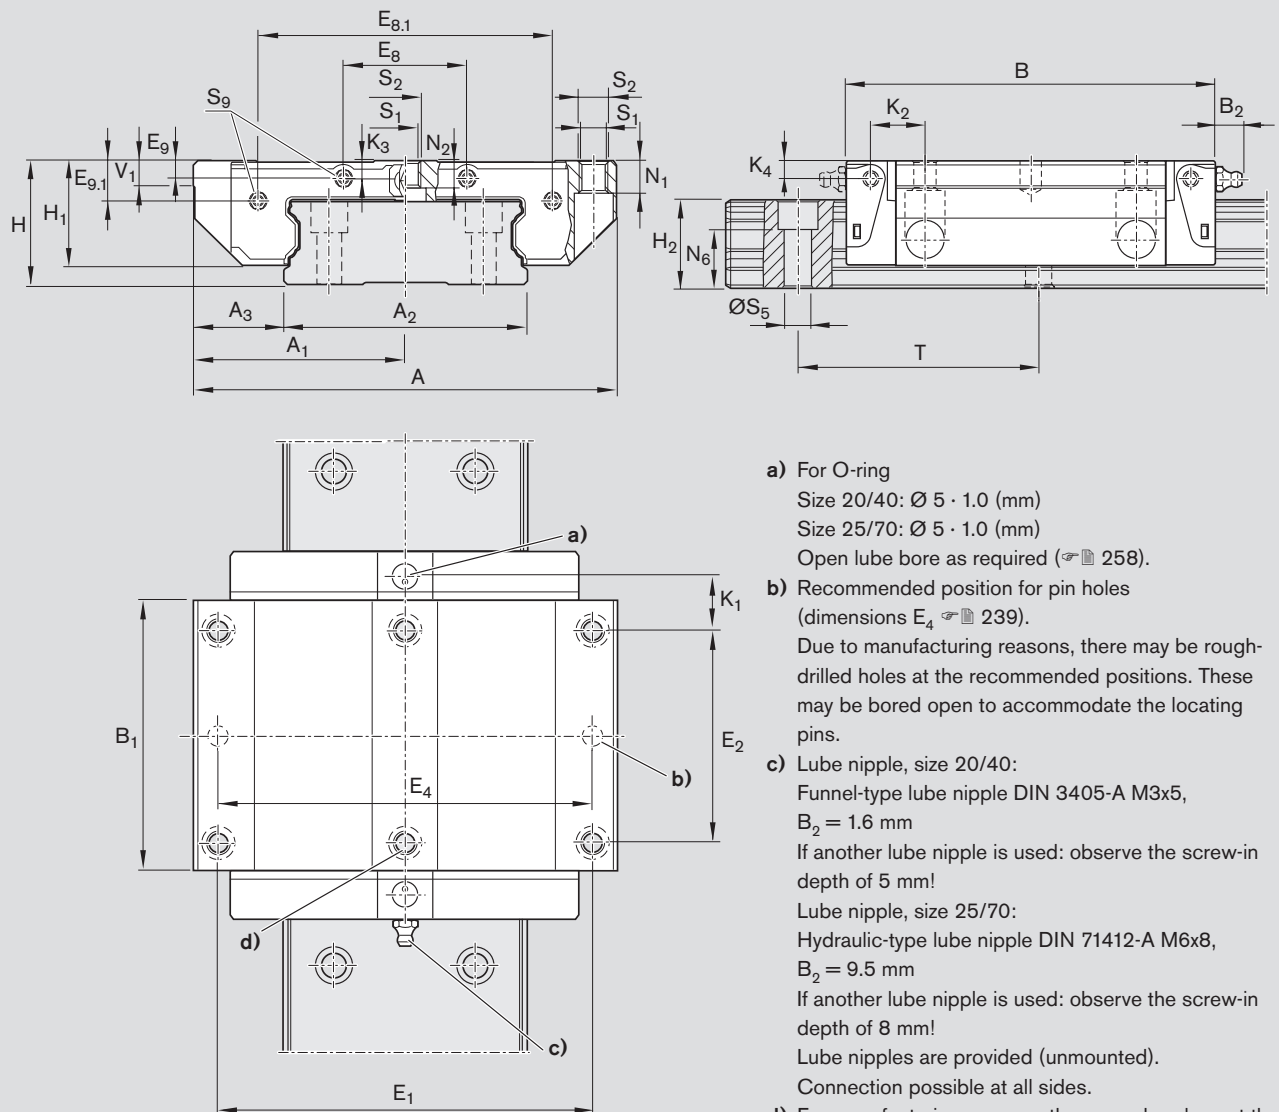

- a) For O-ring  
 Size 20/40:  $\text{Ø} 5 \cdot 1.0$  (mm)  
 Size 25/70:  $\text{Ø} 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 258).
- b) Recommended position for pin holes (dimensions  $E_4$  ☞ 239).  
 Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- c) Lube nipple, size 20/40:  
 Funnel-type lube nipple DIN 3405-A M3x5,  
 $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25/70:  
 Hydraulic-type lube nipple DIN 71412-A M6x8,  
 $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.
- d) For manufacturing reasons, there may be plugs at these positions. These must be removed before mounting.

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20/40	80	40	42	19.0	73	51.3	70	40	18	53.4	3.4	8.1	27	22.50	18.30	10.6	11.0	3.5	3.5
25/70	120	60	69	25.5	105	76.5	107	60	35	83.5	4.9	11.3	35	29.75	23.55	14.3	15.5	5.2	5.2

Size	Dimensions (mm)										Weight (kg)	Load capacities <sup>1)</sup> (N)		Load moments <sup>1)</sup> (Nm)			
	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>l0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
20/40	7.70	3.70	12.5	5.3	M6	4.4	M2.5x1.5 <sup>+3</sup>	60	6.0	0.45	13 650	19 675	310	450	95	135	
25/70	9.35	7.05	14.4	6.7	M8	7.0	M3x2 <sup>+4.5</sup>	80	7.5	1.70	29 000	42 500	1 080	1 580	305	450	

1) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8. Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Wide Ball Rail Systems made of steel and Resist CR

# BNS – Wide, normal, standard height

## Ball Runner Blocks made of steel R1671 ... 1.

### Dynamic characteristics

Travel speed:  $v_{max} = 3 \text{ m/s}$   
 Acceleration:  $a_{max} = 250 \text{ m/s}^2$   
 (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

### Note on lubrication

- Not pre-lubricated

### Further Ball Runner Blocks BNS

- See below for corrosion-resistant ball runner blocks

### Note

Can be used on all Ball Guide Rails BNS.



### Ordering example

Options:

- Ball Runner Block BNS
- Size 35/90
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1671 313 10

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class			Seal for ball runner block without ball chain	SS
		C0	C1	H				
35/90	R1671 3	9		4	3	-	10	
			1	4	3	2	10	
e.g.	R1671 3		1	3			10	

## Ball Runner Blocks, Resist CR R1671 ... 6.

### Note on lubrication

- Not pre-lubricated

### Note

Can be used on all Ball Guide Rails BNS.

### Ordering example

Options:

- Ball Runner Block BNS
- Size 35/90
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1671 313 60

### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class			Seal for ball runner block without ball chain	SS
		C0	C1	H				
35/90	R1671 3	9	1	3			60	
				3			60	
e.g.	R1671 3		1	3			60	


### Preload classes

C0 = without preload  
 C1 = preload 2% C

### Seals

SS = standard seal

Ball Runner Blocks BNS

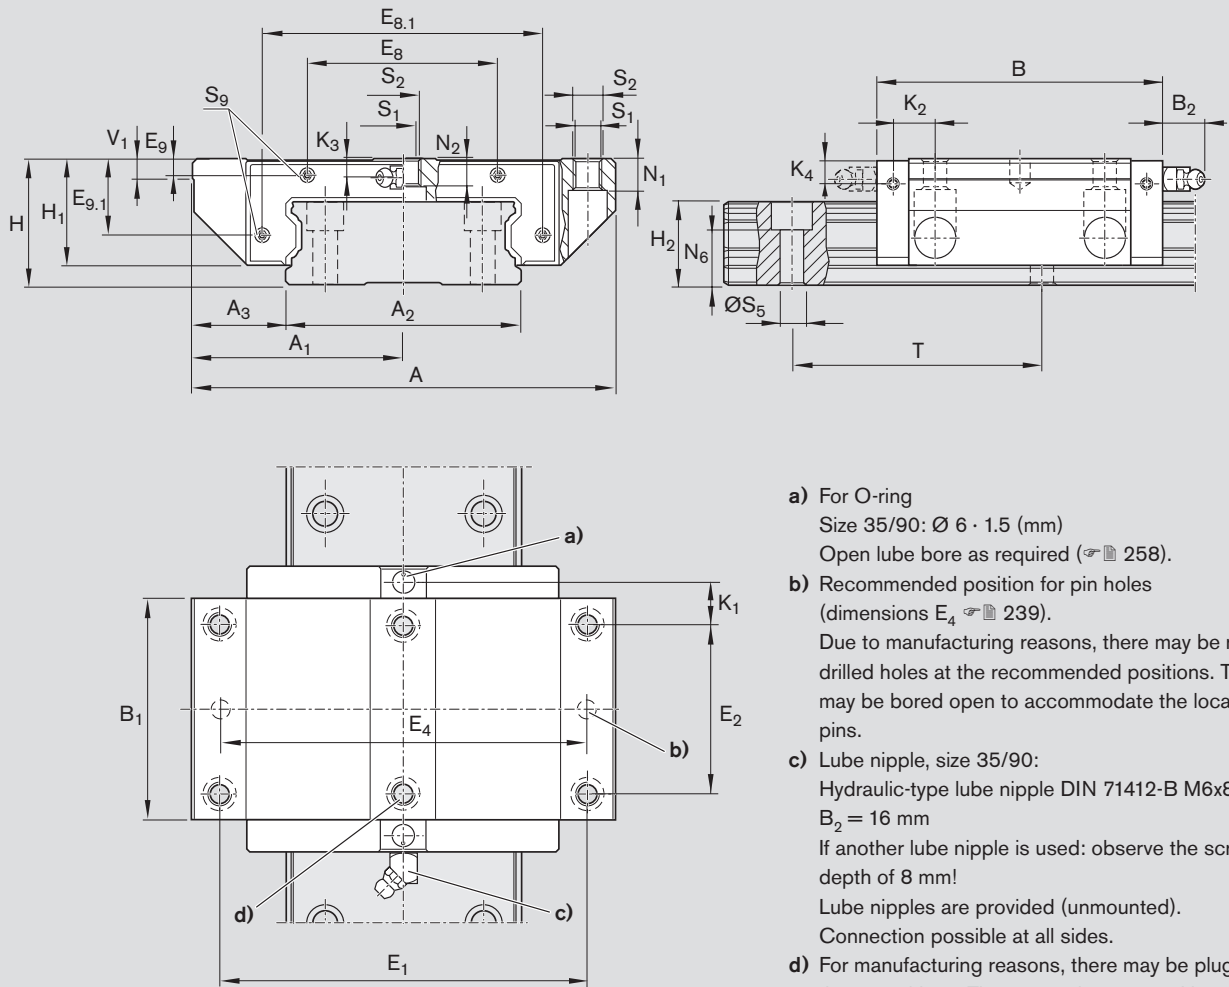

- a) For O-ring  
Size 35/90:  $\varnothing 6 \cdot 1.5$  (mm)  
Open lube bore as required (☞ 258).
- b) Recommended position for pin holes  
(dimensions  $E_4$  ☞ 239).  
Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- c) Lube nipple, size 35/90:  
Hydraulic-type lube nipple DIN 71412-B M6x8,  
 $B_2 = 16$  mm  
If another lube nipple is used: observe the screw-in depth of 8 mm!  
Lube nipples are provided (unmounted).  
Connection possible at all sides.
- d) For manufacturing reasons, there may be plugs at these positions. These must be removed before mounting.

Size	Dimensions (mm)																
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub>	K <sub>1</sub>	K <sub>2</sub>
35/90	162	81	90	36	142	113.6	144	80	79	116	6.8	29.9	50	42.5	31.85	22.8	24.8

Size	Dimensions (mm)											Weight (kg)	Load capacities <sup>1)</sup> (N)		Load moments <sup>1)</sup> (Nm)			
	K <sub>3</sub>	K <sub>4</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>		C	C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>
35/90	9	9	14	12	20.5	8.4	M10	9	M3x5	80	8.0	3.70	58 200	86 300	2 880	4 270	920	1 370

1) Load capacities and moments for Ball Runner Block **without** ball chain.

Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.



Wide Ball Rail Systems made of steel and Resist CR

# CNS – Compact, normal, standard height

## Ball Runner Blocks made of steel<sup>2)</sup> R1672 ... 2.

### Dynamic characteristics

Travel speed:  $v_{max} = 5 \text{ m/s}$   
 Acceleration:  $a_{max} = 500 \text{ m/s}^2$   
 (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

### Note on lubrication

– Pre-lubricated

### Further Ball Runner Blocks CNS

– See below for corrosion-resistant ball runner blocks

### Note

Can be used on all Ball Guide Rails BNS.



### Options and part numbers

Size	Ball runner block with size	Preload class		Accuracy class			Seal for ball runner block			
		C0	C1	N	H	P	without ball chain		with ball chain	
							SS	DS	SS	DS
20/40 <sup>1)</sup>	R1672 5	9		4	3	–	20	–	22	–
			1	4	3	–	20	2Z	22	2Y
25/70	R1672 2	9		4	3	–	20	–	22	–
			1	4	3	–	20	2Z	22	2Y
e.g.	R1672 2		1		3		20			

### Ordering example

Options:

- Ball Runner Block CNS
- Size 25/70
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Part number: R1672 213 20

## Ball Runner Blocks, Resist CR<sup>2)</sup> R1672 ... 7.

### Note on lubrication

– Pre-lubricated

### Note

Can be used on all Ball Guide Rails BNS.

### Options and part numbers

Size	Ball runner block with size	Preload class	Accuracy class			Seal for ball runner block			
			C0		H	without ball chain		with ball chain	
						SS	DS	SS	DS
20/40 <sup>1)</sup>	R1672 5		9		3	70	7Z	72	7Y
25/70	R1672 2		9		3	70	7Z	72	7Y
e.g.	R1672 2		9		3	70			

### Ordering example

Options:

- Ball Runner Block CNS
- Size 25/70
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Part number: R1672 293 70

1) Note: New Ball Runner Block not combinable with existing Ball Guide Rail R167. 8.. ..!

2) In preparation

### Preload classes

C0 = without preload  
 C1 = preload 2% C



### Seals

SS = standard seal  
 DS = double-lipped seal

### Key to table

Gray numbers  
 = version/combination not preferred  
 (longer delivery times in some cases)

Ball Runner Blocks CNS

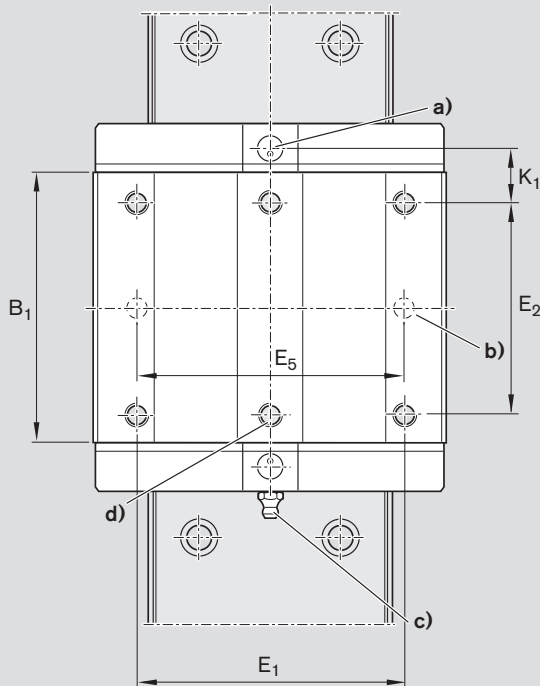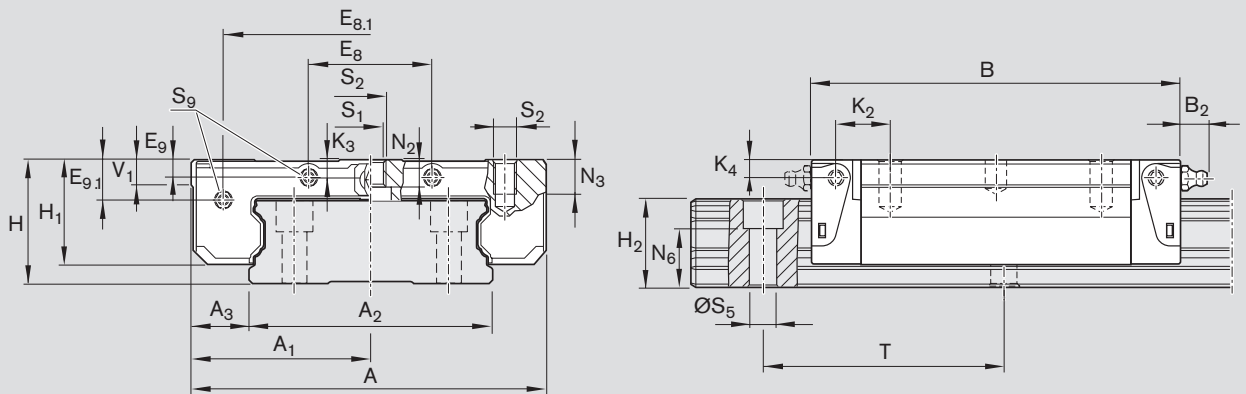

- a) For O-ring  
 Size 20/40:  $\varnothing 5 \cdot 1.0$  (mm)  
 Size 25/70:  $\varnothing 5 \cdot 1.0$  (mm)  
 Open lube bore as required (☞ 258).
- b) Recommended position for pin holes (dimensions  $E_5$  ☞ 239).  
 Due to manufacturing reasons, there may be rough-drilled holes at the recommended positions. These may be bored open to accommodate the locating pins.
- c) Lube nipple, size 20/40:  
 Funnel-type lube nipple DIN 3405-A M3x5,  
 $B_2 = 1.6$  mm  
 If another lube nipple is used: observe the screw-in depth of 5 mm!  
 Lube nipple, size 25/70:  
 Hydraulic-type lube nipple DIN 71412-A M6x8,  
 $B_2 = 9.5$  mm  
 If another lube nipple is used: observe the screw-in depth of 8 mm!  
 Lube nipples are provided (unmounted).  
 Connection possible at all sides.
- d) For manufacturing reasons, there may be plugs at these positions. These must be removed before mounting.

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H	H <sub>1</sub>	H <sub>2</sub>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
20/40	62	31	42	10.0	73.0	51.3	46	32	18	53.4	3.4	8.1	27	22.50	18.30	14.6	15.00	3.5	3.5
25/70	100	50	69	15.5	104.7	76.5	76	50	35	83.5	4.9	11.3	35	29.75	23.55	19.3	20.45	5.2	5.2

Size	Dimensions (mm)										Weight (kg)	Load capacities <sup>1)</sup> (N)		Load moments <sup>1)</sup> (Nm)			
	N <sub>2</sub>	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	C		C <sub>0</sub>	M <sub>t</sub>	M <sub>t0</sub>	M <sub>L</sub>	M <sub>L0</sub>	
20/40	3.70	6	12.5	5.3	M6	4.4	M2.5x1.5 <sup>+3</sup>	60	6.0	0.35	13 650	19 675	310	450	95	135	
25/70	7.05	8	14.4	6.7	M8	7.0	M3x2 <sup>+4.5</sup>	80	7.5	1.50	29 000	42 500	1 080	1 580	305	450	

1) Load capacities and moments for Ball Runner Block **without** ball chain. Load capacities and moments for Ball Runner Block **with** ball chain ☞ 8. Determination of the dynamic load capacities and moments is based on a travel life of 100,000 m per ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply values **C**, **M<sub>t</sub>** and **M<sub>L</sub>** from the table by 1.26.

Wide Ball Rail Systems made of steel and Resist CR

# Product Description, Ball Guide Rails BNS

## Characteristic features

- Top rigidity in all load directions
- Top torque load capacity


## Corrosion protection (optional)

- Resist CR:  
Ball guide rail made of steel with matte-silver hard-chrome plated corrosion-resistant coating in accuracy class H


Ball guide rails with plastic mounting hole plugs



Ball guide rails with steel mounting hole plugs

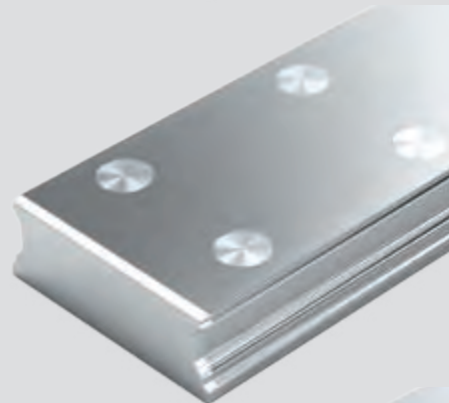

Ball guide rails for mounting from below

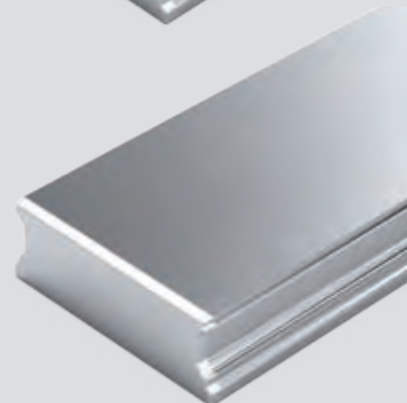

## Note

- Size 20/40:  
New Ball Rail Systems with different ball diameters. Not interchangeable with previous size 20/40 versions!

Definition Ball guide rail design style		Code (example)		
		B	N	S
Width	Slimline			
	Wide	B		
Length	Normal		N	
Height	Standard height			S

## Ordering Examples

### Ordering ball guide rails in recommended lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

Options and part numbers								
Size	Ball guide rail with size	Accuracy class			Number of sections, Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4$ mm
		N	H	P	One-piece	Composite		
20/40 <sup>1)</sup>	R1675 50	4	3	2	31, ...	3, ...	60	64
25/70	R1675 20	4	3	2	31, ...	3, ...	80	48
35/90	R1675 30	4	3	2	31, ...	3, ...	80	48
e.g.	R1675 30		3		31, 1676			

Excerpt from table with part numbers and recommended rail lengths for ordering example

### From the desired length to the recommended length

$$L = \left( \frac{L_W}{T} \right)^* \cdot T - 4$$

\* Round up the quotient  $L_W/T$  to the next whole number.

$L_W$  = desired length


$T$  = hole spacing

### Calculation example

$$L = \left( \frac{1660 \text{ mm}}{80 \text{ mm}} \right) \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$$

$$L = 1676 \text{ mm}$$

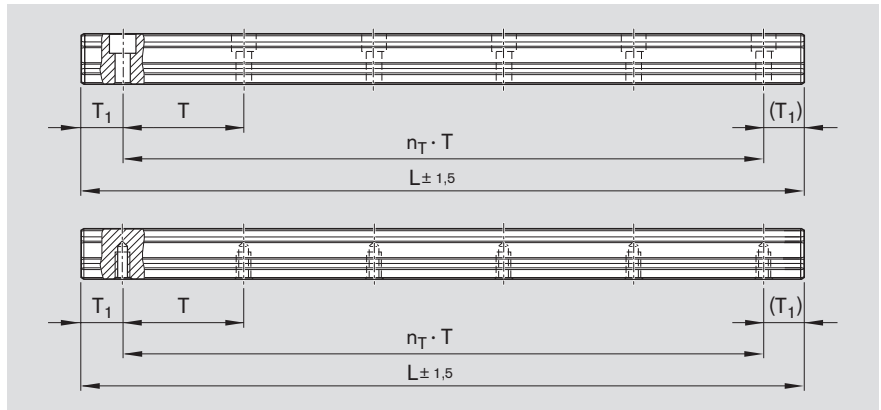

$$L = n_B \cdot T - 4$$

Basis: number of holes per row

$$L = n_T \cdot T + 2 \cdot T_{1S}$$

Basis: number of spaces between holes

$L$  = recommended rail length (mm)

$L_W$  = desired rail length (mm)

$T$  = hole spacing<sup>1)</sup> (mm)

$T_{1S}$  = preferred dimension<sup>1)</sup> (mm)

$n_B$  = number of holes per row (-)

$n_T$  = no. of spaces between holes (-)

1) For values, see dimensions table at dimension drawing.

### Notes on ordering examples

If the preferred dimension  $T_{1S}$  cannot be used:

- Select an end space  $T_1$  between  $T_{1S}$  and  $T_{1 \min}$ .
- Alternatively, select an end space between  $T_1$  and  $T_{1 \max}$ .

### Ordering example 1 (up to $L_{\max}$ )

- Ball guide rail BNS size 35/90 with plastic mounting hole plugs
- Accuracy class H
- Calculated rail length 1676 mm, ( $20 \cdot T$ , preferred dimension  $T_{1S} = 38$  mm; number of holes per row  $n_B = 21$ )

### Ordering data

Part number, rail length (mm)

$T_1 / n_T \cdot T / T_1$  (mm)

**R1675 303 31, 1676 mm**

**38 / 20 · 80 / 38 mm**

### Ordering example 2 (over $L_{\max}$ )

- Ball guide rail BNS size 35/90 with plastic mounting hole plugs
- Accuracy class H
- Calculated rail length 5116 mm, 2 sections ( $63 \cdot T$ , preferred dimension  $T_{1S} = 38$  mm; number of holes per row  $n_B = 64$ )

### Ordering data

Part number and number of sections,

rail length (mm)

$T_1 / n_T \cdot T / T_1$  (mm)

**R1675 303 32, 5116 mm**

**38 / 63 · 80 / 38 mm**

Rail lengths greater than  $L_{\max}$  are made up of matching rail sections mounted end to end.

Wide Ball Rail Systems made of steel and Resist CR

## BNS with Plastic Mounting Hole Plugs


### Ball Guide Rails made of steel R1675 .0. ..

With two-row mounting hole pattern,  
for mounting from above,  
with plastic mounting hole plugs

#### Notes for mounting

- Plastic mounting hole plugs included in scope of supply.
- Follow the mounting instructions!
- Send for the publication “Mounting Instructions for Ball Rail Systems.”
- Composite guide rails also available.

#### Further Ball Guide Rails BNS and accessories

- See below for corrosion-resistant ball guide rails
- Plastic Mounting Hole Plugs, part numbers  179



#### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections „ Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$
		N	H	P	One-piece	Composite		
20/40 <sup>1)</sup>	R1675 50	4	3	2	31, ...	3., ...	60	64
25/70	R1675 20	4	3	2	31, ...	3., ...	80	48
35/90	R1675 30	4	3	2	31, ...	3., ...	80	48
e.g.	R1675 30		3		31, 1676			

### Ball Guide Rails, Resist CR R1673 .0. ..

With two-row mounting hole pattern,  
for mounting from above,  
with plastic mounting hole plugs

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class	Number of sections „ Rail length L (mm), ...			Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$
			H	One-piece Uncoated end faces	Coated end faces		
20/40 <sup>1)</sup>	R1673 50	3	31, ...	41, ...	4., ...	60	64
25/70	R1673 20	3	31, ...	41, ...	4., ...	80	48
35/90	R1673 30	3	31, ...	41, ...	4., ...	80	48
e.g.	R1673 30	3		42, 5116			

1) Note: New Ball Guide Rail not combinable with existing Ball Runner Block R1671. 8.. ..!

#### Ordering example 1 (up to $L_{\max}$ )

Options:

- Ball Guide Rail BNS
- Size 35/90
- Accuracy class H
- One-piece
- Uncoated end faces
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1675 303 31, 1676 mm

#### Ordering example 2 (over $L_{\max}$ )


Options:

- Ball Guide Rail CR, BNS
- Size 35/90
- Accuracy class H
- **2 sections**
- Coated end faces
- Rail length  $L = 5116 \text{ mm}$

Part number:

R1673 303 42, 5116 mm

## Ball Guide Rails BNS

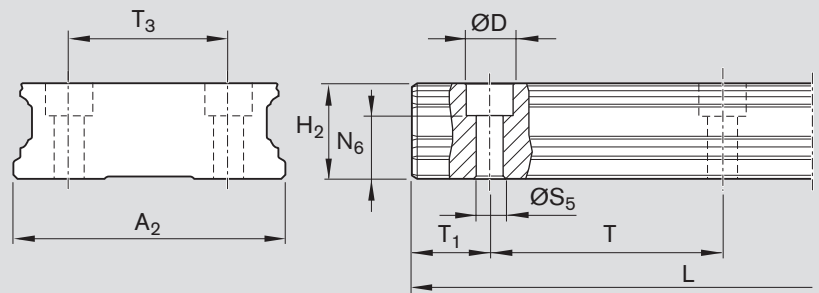

Size	Dimensions (mm)											Weight (kg/m)
	$A_2$	D	$H_2^{1)}$	$L_{max}$	$N_6^{\pm 0.5}$	$S_5$	T	$T_{1min}$	$T_{1S}^{2)}$	$T_{1max}$	$T_3$	
20/40	42	7.4	18.30	3 836	12.45	4.4	60	10	28	50	24	5.3
25/70	69	11.0	23.55	3 836	14.50	7.0	80	10	38	70	40	11.6
35/90	90	15.0	31.85	3 836	20.50	9.0	80	12	38	68	60	21.0

1) Dimension  $H_2$  without cover strip

2) Recommended: preferred dimension  $T_{1S}$  with tolerances  $\pm 0.75$ .

Wide Ball Rail Systems made of steel and Resist CR

# BNS with Steel Mounting Hole Plugs

## Ball Guide Rails made of steel R1676 .5. ..

With two-row mounting hole pattern,  
for mounting from above,  
with steel mounting hole plugs

### Accessories

- Steel mounting hole plugs ☞ 179
- Mounting tool for steel mounting hole plugs ☞ 179

### Notes for mounting

- Steel mounting hole plugs not included in scope of supply.
- Follow the mounting instructions!
- Send for the publication "Mounting Instructions for Ball Rail Systems."
- Composite guide rails also available.



### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections .. Rail length L (mm), ....		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$
		N	H	P	One-piece	Composite		
25/70	R1676 25	4	3	2	31, ...	3, ...	80	48
35/90	R1676 35	4	3	2	31, ...	3, ...	80	48
e.g.	R1676 35		3		31, 1676			

### Ordering example 1 (up to $L_{max}$ )

Options:

- Ball Guide Rail BNS
- Size 35/90
- Accuracy class H
- One-piece
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1676 353 31, 1676 mm

### Ordering example 2 (over $L_{max}$ )


Options:

- Ball Guide Rail BNS
- Size 35/90
- Accuracy class H
- **2 sections**
- Rail length  $L = 5116 \text{ mm}$

Part number:

R1676 353 32, 5116 mm

### Ball Guide Rails BNS

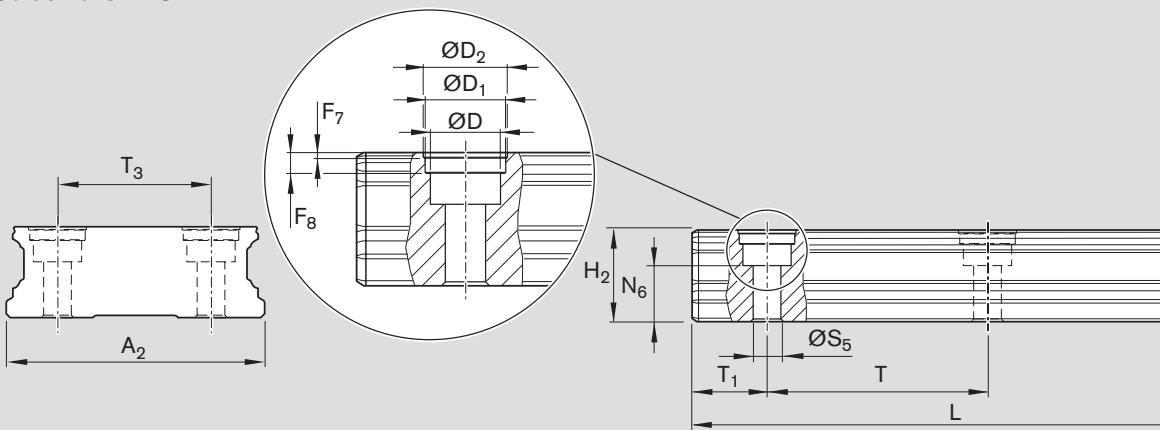

Size	Dimensions (mm)														Weight (kg/m)	
	A <sub>2</sub>	D	D <sub>1</sub>	D <sub>2</sub>	F <sub>7</sub>	F <sub>8</sub>	H <sub>2</sub> <sup>1)</sup>	L <sub>max</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>5</sub>	T	T <sub>1 min</sub>	T <sub>1S</sub> <sup>2)</sup>	T <sub>1 max</sub>		T <sub>3</sub>
25/70	69	11.0	12.55	13	0.9	3.7	23.55	3 836	14.5	7.0	80	10	38	70	40	11.6
35/90	90	15.0	17.55	18	0.9	3.6	31.85	3 836	20.5	9.0	80	12	38	68	60	21.0

1) Dimension H<sub>2</sub> without cover strip

2) Recommended: preferred dimension T<sub>1S</sub> with tolerances ±0.75.


## BNS for mounting from below

### Ball Guide Rails made of steel R1677 .0. ..

With two-row mounting hole pattern,  
for mounting from below

#### Notes for mounting

- Follow the mounting instructions!  
Send for the publication “Mounting Instructions for Ball Rail Systems.”
- Composite guide rails also available.

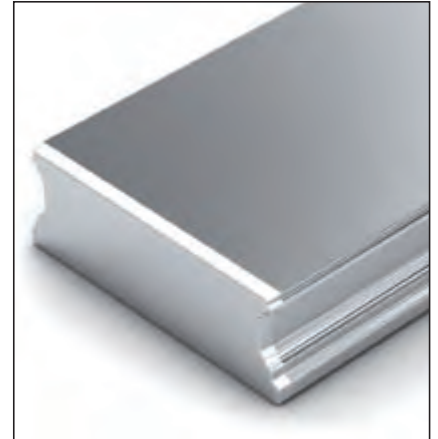

#### Options and part numbers

Size	Ball guide rail with size	Accuracy class			Number of sections „ Rail length L (mm), ...		Hole spacing T (mm)	Recommended rail length according to formula $L = n_B \cdot T - 4 \text{ mm}$
		N	H	P	One-piece	Composite		
20/40 <sup>1)</sup>	R1677 50	4	3	2	31, ...	3., ...	60	64
25/70	R1677 20	4	3	2	31, ...	3., ...	80	48
35/90	R1677 30	4	3	2	31, ...	3., ...	80	48
e.g.	R1677 30		3		31, 1676			

1) Note: New Ball Guide Rail not combinable with existing Ball Runner Block R1671. 8.. ..!

#### Ordering example 1 (up to $L_{max}$ )

Options:

- Ball Guide Rail BNS
- Size 35/90
- Accuracy class H
- One-piece
- Rail length  $L = 1676 \text{ mm}$

Part number:

R1677 303 31, 1676 mm

#### Ordering example 2 (over $L_{max}$ )


Options:

- Ball Guide Rail BNS
- Size 35/90
- Accuracy class H
- **2 sections**
- Rail length  $L = 5116 \text{ mm}$

Part number:

R1677 303 32, 5116 mm

#### Ball Guide Rails BNS

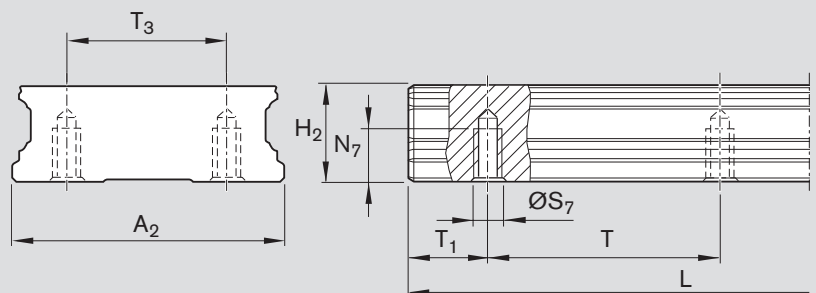

Size	Dimensions (mm)										Weight (kg/m)
	$A_2$	$H_2^{1)}$	$L_{max}$	$N_7$	$S_7$	T	$T_{1 \min}$	$T_{1S}^{2)}$	$T_{1 \max}$	$T_3$	
20/40	42	18.30	3 836	7.5	M5	60	10	28	50	24	5.3
25/70	69	23.55	3 836	12.0	M6	80	10	38	70	40	11.6
35/90	90	31.85	3 836	15.0	M8	80	12	38	68	60	21.0

1) Dimension  $H_2$  without cover strip

2) Recommended: preferred dimension  $T_{1S}$  with tolerances  $\pm 0.75$ .



Accessories for Ball Runner Blocks and Ball Guide Rails

## Product Description, Accessories for Ball Runner Blocks


Rexroth offers limitless interchangeability as all ball runner block versions can be combined at will with all accessories within each size.

The entire range is perfectly geared to provide top performance and to meet all special requirements.


### Overview of Accessories for Ball Runner Blocks

Scraper Plates  155



Two-piece End Seal<sup>1)</sup>  156




FKM Seal, one-piece and two-piece<sup>1)</sup>  
 157




Seal Kit<sup>1)</sup>  158




Lube Adapter, only for existing systems with high Ball Runner Blocks SNH or SLH<sup>1)</sup>  159



Lube Plate<sup>1)</sup>  160



Front Lube Unit  162

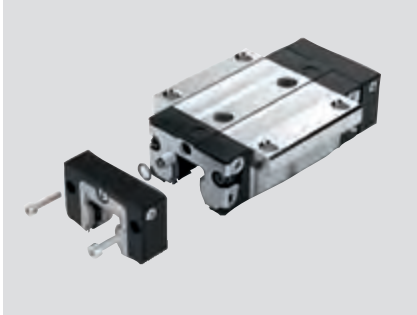


Bellows  166



Lube Nipples  170




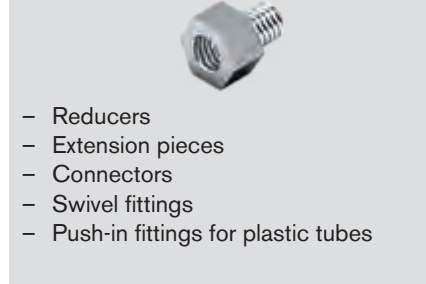
Plastic Hose for lube fittings  
 171



O-rings  171



Lube fittings  172




<sup>1)</sup> Not available for Ball Runner Blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)


## Accessories for Ball Runner Blocks

### Scraper Plates R16.0 .10 ..

- Material: corrosion-resistant steel per EN 10088
- Specification: bright
- Precision version with 0.1 to 0.3 mm maximum gap dimension

#### Notes for mounting

- When combining with two-piece end seals, use seal kit: Part numbers R1619 .20 40/50  158
- Comes complete with mounting screws.
- When mounting, make sure there is a uniform gap between the guide rail and the scraper.
- For end-face lubrication, consider minimum screw-in depth.
- Follow the mounting instructions.

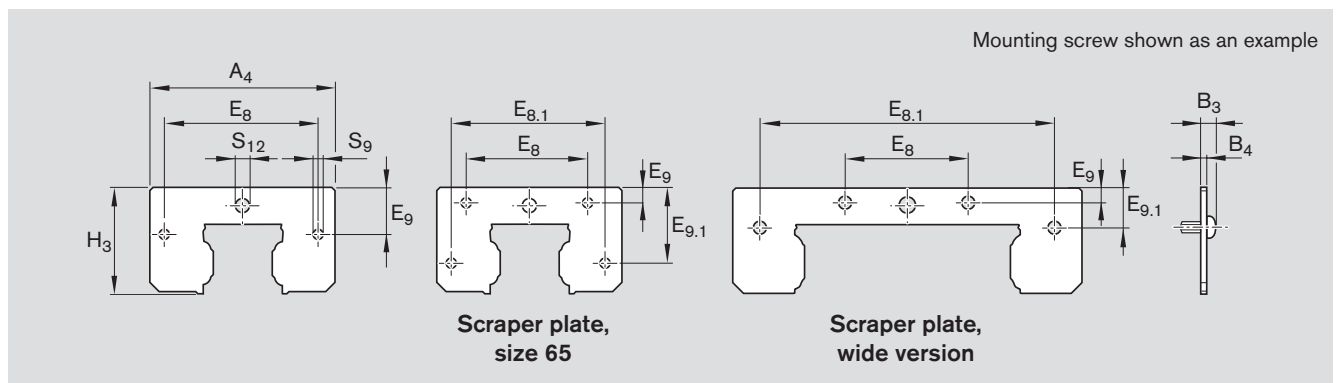

Size	Part number for ball guide rail with cover strip	Dimensions (mm)										Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H <sub>3</sub>	S <sub>9</sub>	S <sub>12</sub>	
15	R1620 110 30	33.0	3.1	1.0	24.55	–	6.30	–	19.2	3.5	4.6	5
20	R1620 810 30	42.0	3.4	1.0	32.40	–	6.80	–	24.8	4.0	5.1	6
	R1620 810 35 <sup>3)</sup>	41.0	3.4	1.0	30.50	–	5.10	–	22.8	4.0	4.0	5
25	R1620 210 30	47.0	3.4	1.0	38.30	–	11.00	–	29.5	4.0	7.0	8
	R1620 210 35 <sup>3)</sup>	47.0	3.4	1.0	38.30	–	8.00	–	26.5	4.0	4.0	7
30	R1620 710 30	59.0	3.4	1.0	48.40	–	14.10	–	34.7	4.0	7.0	12
35	R1620 310 40 <sup>1)</sup>	69.0	3.4	1.0	58.00	–	17.00	–	40.1	4.0	7.0	16
45	R1620 410 40 <sup>1)</sup>	85.0	5.1	2.0	69.80	–	20.50	–	50.0	5.0	7.0	50
55	R1620 510 40 <sup>1)</sup>	98.0	5.7	2.0	80.00	–	21.80	–	56.4	6.0	7.0	65
65	R1620 610 40 <sup>1)</sup>	124.0	5.6	2.5	76.00	100.0	10.00	52.50	74.7	5.0	9.0	140
20/40 <sup>4)5)</sup>	R1670 510 00 <sup>2)</sup>	60.0	3.1	1.0	18.00	53.4	2.65	7.35	21.7	3.5	4.0	7
25/70 <sup>4)</sup>	R1670 210 10 <sup>2)</sup>	101.0	3.4	1.0	35.00	83.5	4.35	10.75	29.1	4.0	7.0	14
35/90 <sup>4)</sup>	R1670 310 10 <sup>2)</sup>	129.0	3.4	1.0	79.00	116.0	5.60	28.70	40.8	4.0	7.0	25

1) Part number for ball guide rail **without** cover strip: R1620 .10 30

2) Ball guide rail **without** cover strip

3) For ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)

4) Wide Ball Rail System

5) **Note:** New scraper plate not combinable with existing Ball Guide Rail R167. 8.. ..!

Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks



## End Seal R1619 .2. .0

### Two-piece

- Material: corrosion-resistant steel per EN 10088 with polymer seal
- Specification: bright

### Notes for mounting

- Comes complete with mounting screws.
- For end-face lubrication, consider minimum screw-in depth.
- Follow the mounting instructions.

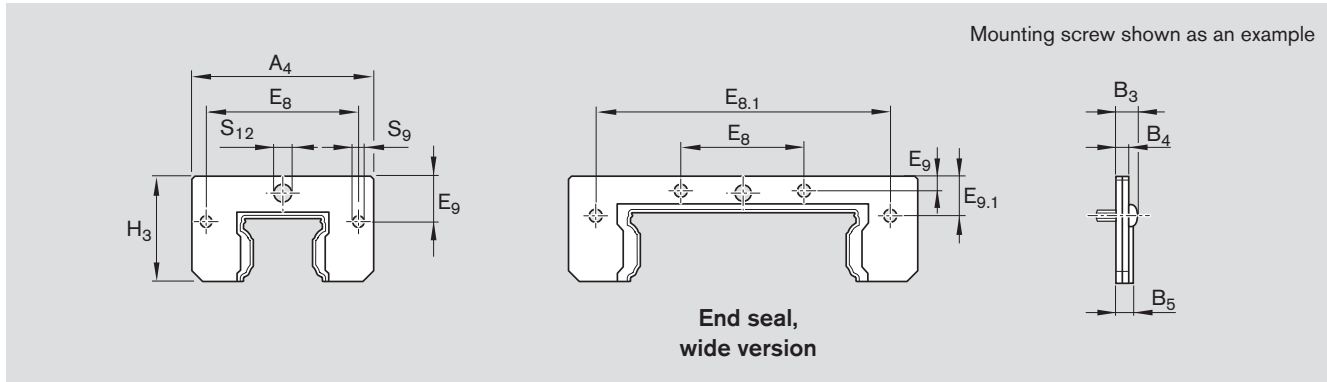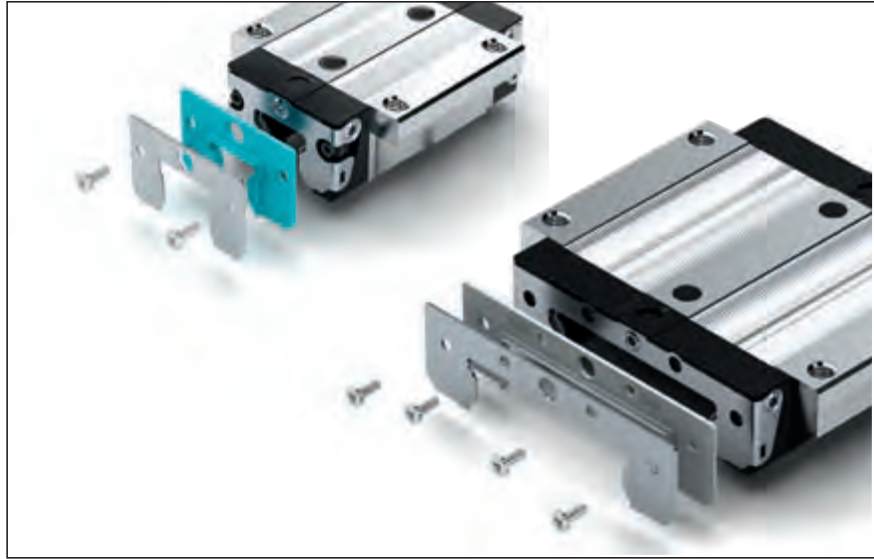

Size	Part number	Dimensions (mm)											Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	B <sub>5</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H <sub>3</sub>	S <sub>9</sub>	S <sub>12</sub>	
15	R1619 121 20	32.0	4.3	2.2	3.0	24.55	-	6.30	-	19.0	3.5	4.3	6.0
20 <sup>1)</sup>	R1619 821 20	42.0	4.9	2.5	3.3	32.40	-	6.80	-	24.3	4.0	5.1	8.0
25 <sup>1)</sup>	R1619 221 30	47.0	4.9	2.5	3.3	38.30	-	11.00	-	29.0	4.0	7.0	10.0
30	R1619 721 30	59.0	5.7	3.3	4.5	48.40	-	14.10	-	34.5	4.0	7.0	18.0
35	R1619 321 30	69.0	5.7	3.3	4.5	58.00	-	17.00	-	39.5	4.0	7.0	25.0
45	R1619 421 30	85.0	7.1	4.0	5.5	69.80	-	20.50	-	49.5	5.0	7.0	55.0
55	R1619 521 30	98.0	7.7	4.0	5.5	80.00	-	21.50	-	56.0	6.0	7.0	65.0
20/40 <sup>2)3)</sup>	R1619 522 20	60.0	4.6	2.5	3.3	18.00	53.4	2.65	7.35	21.7	3.5	4.0	7.5
25/70 <sup>2)</sup>	R1619 222 20	99.0	4.9	2.5	3.3	35.00	83.5	4.30	10.70	28.6	4.0	7.3	14.5
35/90 <sup>2)</sup>	R1619 322 20	128.6	5.7	3.3	4.5	79.00	116.0	5.80	28.90	41.0	4.0	7.0	40.0

1) Not for ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)


2) Wide Ball Rail System

3) Note: New end seal not combinable with existing Ball Guide Rail R167. 8.. ..!

## Accessories for Ball Runner Blocks

### FKM Seal R1619 . 20 30

#### Two-piece


- Material: corrosion-resistant steel per EN 10088 and seal made of FKM
- For application areas and resistance  23

#### Special feature

Easy mounting and removal even when guide rail is screwed down.

#### Notes for mounting

- Comes complete with mounting screws.
- For end-face lubrication, consider minimum screw-in depth.
- Follow the mounting instructions.

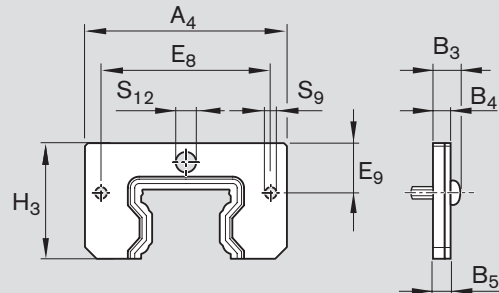


Size	Part number	Dimensions (mm)									Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	B <sub>5</sub>	E <sub>8</sub>	E <sub>9</sub>	H <sub>3</sub>	S <sub>9</sub>	S <sub>12</sub>	
35	R1619 320 30	69	8.4	4	6	58.0	17.0	39.5	4	7	39.0
45	R1619 420 30	85	9.1	4	6	69.8	20.5	49.5	5	7	61.0
55	R1619 520 30	98	9.7	4	6	80.0	21.8	56.4	6	7	80.5

#### One-piece

- Material: corrosion-resistant steel per EN 10088 and seal made of FKM

#### Notes for mounting

- Comes complete with mounting screws.
- For end-face lubrication, consider minimum screw-in depth.
- Follow the mounting instructions.

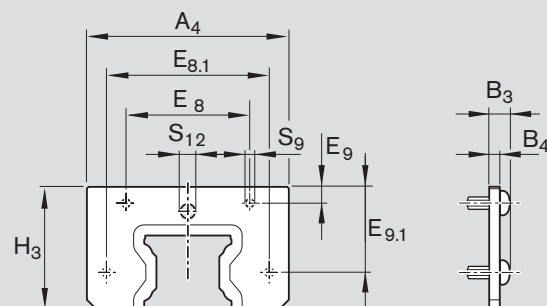

Size	Part number	Dimensions (mm)									Weight (g)	
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H <sub>3</sub>	S <sub>9</sub>		S <sub>12</sub>
65	R1619 620 30	124	9.6	6.5	76	100	10	52.5	74.7	5	9	146

Accessories for Ball Runner Blocks and Ball Guide Rails



# Accessories for Ball Runner Blocks

## Seal Kit R1619 .20 .0

- 1 Scraper plate
- 2 Supporting plate
- 3 Two-piece end seal

### Notes for mounting

- The seal kit is recommended in cases where both a scraper plate and a two-piece end seal are required.
- Comes complete with mounting screws.
- For end-face lubrication, consider minimum screw-in depth.
- Follow the mounting instructions.

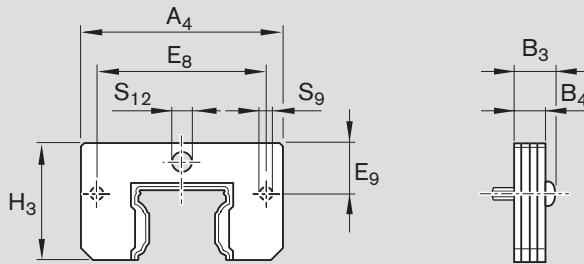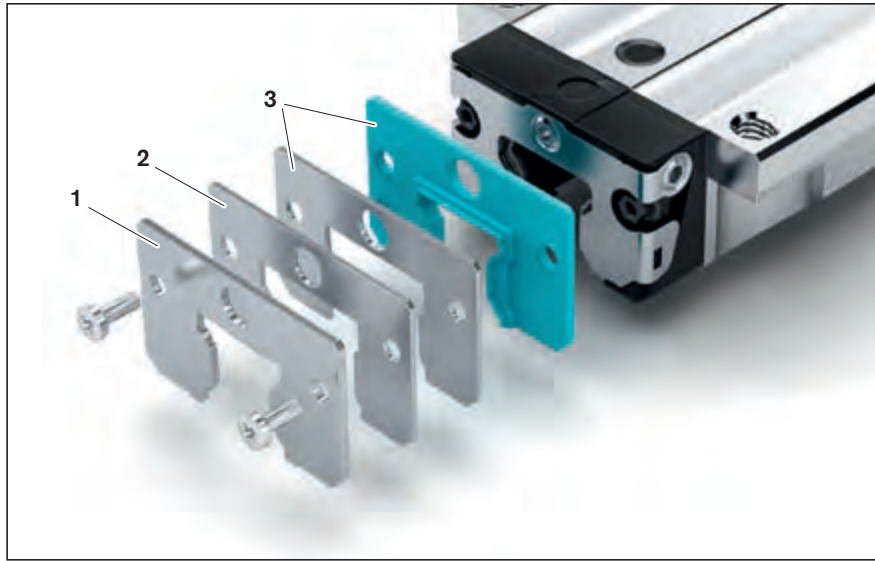

Size	Part number for ball guide rail		Dimensions (mm)									Weight (g)
	without cover strip	with cover strip	A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	E <sub>8</sub>	E <sub>9</sub>	H <sub>3</sub>	S <sub>9</sub>	S <sub>12</sub>		
15	R1619 120 50	R1619 120 50	32.0	6.3	4.2	24.55	6.30	19.0	3.5	4.3	16	
20 <sup>1)</sup>	R1619 820 50	R1619 820 50	42.0	6.9	4.5	32.40	6.80	24.3	4.0	5.1	20	
25 <sup>1)</sup>	R1619 220 50	R1619 220 50	47.0	6.9	4.5	38.30	11.00	29.0	4.0	7.0	26	
30	R1619 720 50	R1619 720 50	59.0	8.2	5.8	48.40	14.10	34.5	4.0	7.0	42	
35	R1619 320 40	R1619 320 50	69.0	8.2	5.8	58.00	17.00	39.5	4.0	7.0	57	
45	R1619 420 40	R1619 420 50	85.0	11.1	8.0	69.80	20.50	49.5	5.0	7.0	155	
55	R1619 520 40	R1619 520 50	98.0	11.7	8.0	80.00	21.50	56.0	6.0	7.0	195	

1) **Not** for ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)

## Accessories for Ball Runner Blocks


### Lube Adapter R1621 .00 05

For oil and grease lubrication from above, only for high ball runner blocks SNH R1621 or SLH R1624

- Material: plastic
- Quantity per pack: 1 pc.

#### Notes for mounting

- O-rings are provided.
- Before mounting, use a heated pointed metal tool to open the lube bore on the ball runner block (do not use a drill).
- For details, see 258.

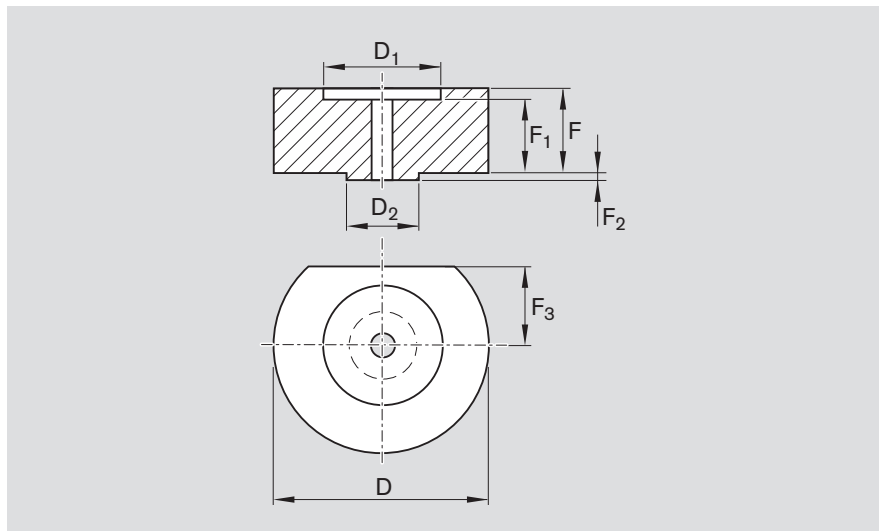

Size	Part number	Dimensions (mm)							Weight (g)
		D	D <sub>1</sub>	D <sub>2</sub>	F	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	
15	R1621 100 05	12	6.2	3.4	3.7	3.1	0.5	3.20	0.5
25	R1621 200 05	15	7.2	4.4	3.8	3.2	0.5	5.85	0.9
30	R1621 700 05	16	7.2	4.4	2.8	2.2	0.5	6.10	0.7
35	R1621 300 05	18	7.2	4.4	6.8	6.2	0.5	6.80	2.2
45	R1621 400 05	20	7.2	4.4	9.8	9.2	0.5	8.30	4.1



Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks

## Lubrication Plate R1620 .11 20



For standard lube nipples

- Material: aluminum

### Notes for mounting

- Comes complete with all necessary parts for mounting.
- Sizes 15 - 20:  
A funnel-type lube nipple with a knock-in spigot is supplied ready for insertion.
- Sizes 25 - 65:  
The runner block lube nipple can be used.
- Follow the mounting instructions.

**⚠ The lube pin (1) must be mounted between the lubrication plate and the ball runner block!  
(The pin contains a lube bore.)**

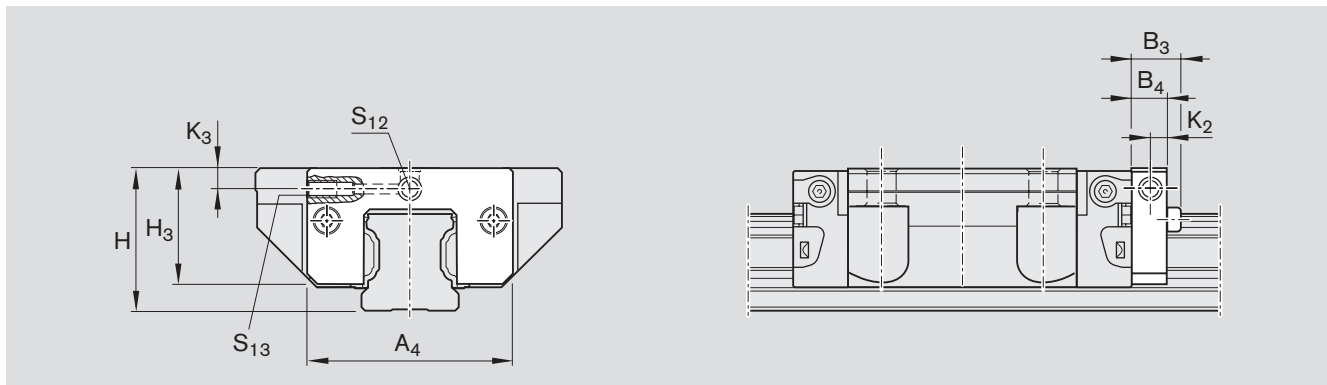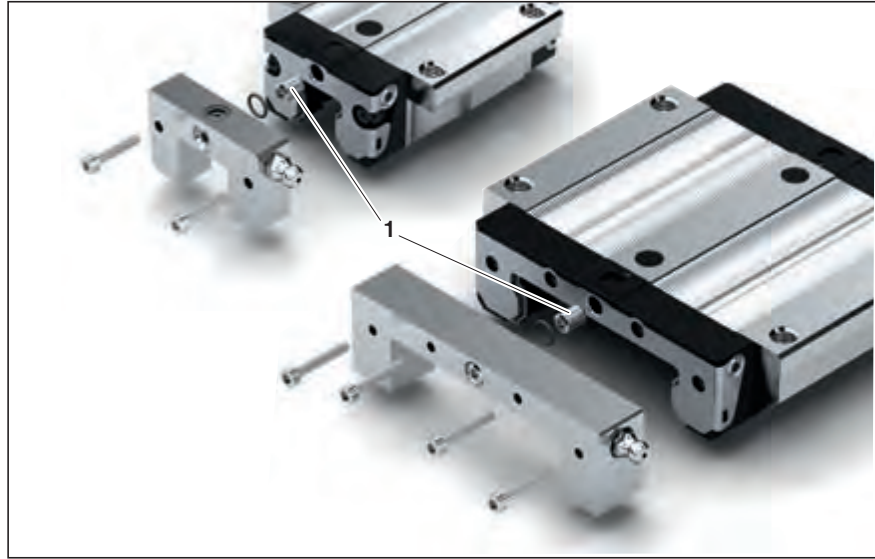

Size	Part number	Dimensions (mm)									Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	H	H <sub>3</sub> <sup>2)</sup>	K <sub>2</sub>	K <sub>3</sub> <sup>2)</sup>	S <sub>12</sub>	S <sub>13</sub>	
15	R1620 111 20	32	13.1	11	24 28 <sup>3)</sup>	19.0	5.5	3.4 7.4 <sup>3)</sup>	M3	Ø3	15
20 <sup>1)</sup>	R1620 811 20	42	15.0	12	30	24.8	6.0	3.5	M3	Ø3	25
25 <sup>1)</sup>	R1620 211 20	47	15.0	12	36 40 <sup>3)</sup>	28.3	6.0	6.0 10.0 <sup>3)</sup>	M6	M6	30
30	R1620 711 20	59	15.0	12	42 45 <sup>3)</sup>	33.8	6.0	8.0 11.0 <sup>3)</sup>	M6	M6	45
35	R1620 311 20	69	15.0	12	48 55 <sup>3)</sup>	39.1	6.0	8.0 15.0 <sup>3)</sup>	M6	M6	60
45	R1620 411 20	85	16.0	12	60 70 <sup>3)</sup>	48.5	6.0	8.0 18.0 <sup>3)</sup>	M6	M6	85
55	R1620 511 20	98	17.0	12	70 80 <sup>3)</sup>	56.0	6.0	9.0 19.0 <sup>3)</sup>	M6	M6	115
65	R1620 611 20	124	18.0	14	90	75.7	7.0	18.0	M8x1	M8x1	250

1) Not for ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)

2) Referred to the runner block mounting face

3) For ball runner blocks S.H (slimline, ..., high)

## Accessories for Ball Runner Blocks


### Lubrication Plate G 1/8 R1620 .11 30

For lube nipple G 1/8

– Material: aluminum

#### Notes for mounting

- Comes complete with all necessary parts for mounting.
- Ball runner block S.. (slimline ... ..)  
Size 25: remember that the lubrication plate will project at the side.
- Follow the mounting instructions.

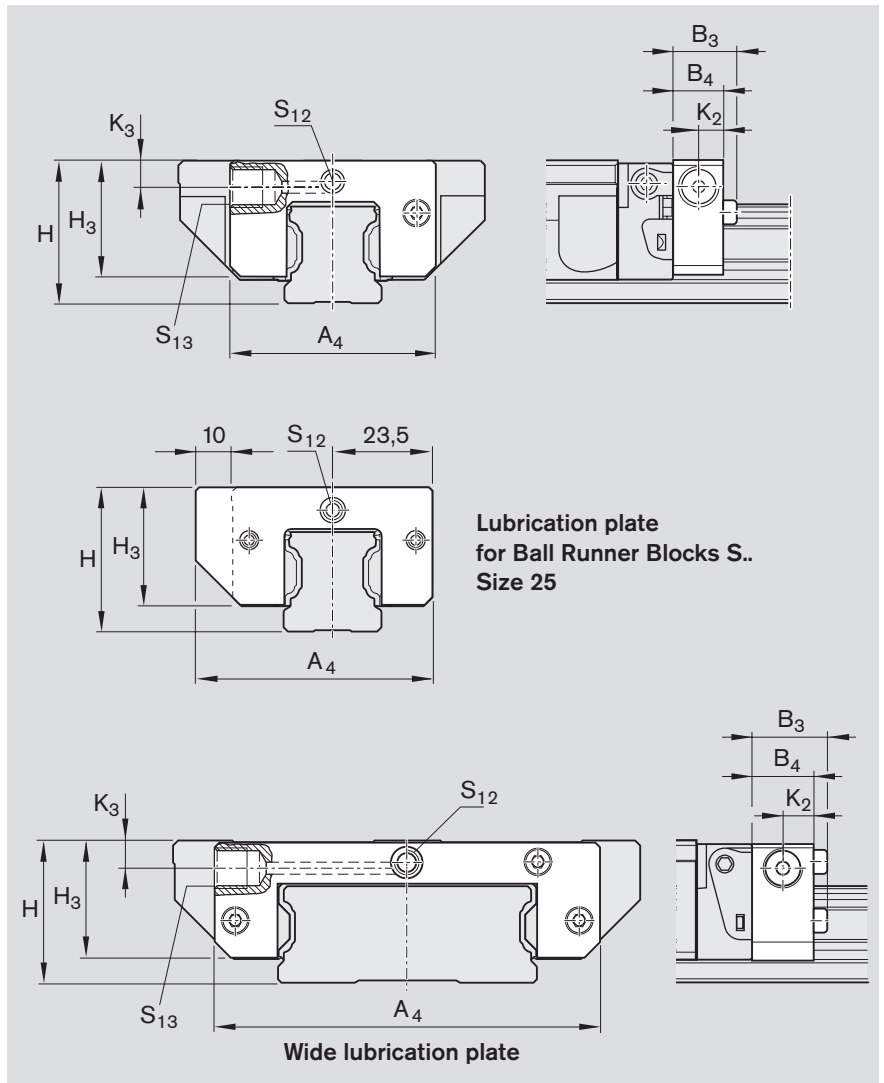

Size	Part number	Dimensions (mm)									Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	B <sub>4</sub>	H	H <sub>3</sub> <sup>2)</sup>	K <sub>2</sub>	K <sub>3</sub> <sup>2)</sup>	S <sub>12</sub>	S <sub>13</sub>	
25 <sup>1)</sup>	R1620 211 30	57	19.0	16	36 40 <sup>3)</sup>	28.3	8	7.0 11.0 <sup>3)</sup>	M6	G 1/8x8	40
30	R1620 711 30	59	19.0	16	42 45 <sup>3)</sup>	33.8	8	7.0 10.0 <sup>3)</sup>	M6	G 1/8x8	59
35	R1620 311 30	69	19.0	16	48 55 <sup>3)</sup>	39.1	8	8.0 15.0 <sup>3)</sup>	M6	G 1/8x8	79
45	R1620 411 30	85	20.0	16	60 70 <sup>3)</sup>	48.5	8	8.0 18.0 <sup>3)</sup>	M6	G 1/8x8	112
55	R1620 511 30	98	21.0	16	70 80 <sup>3)</sup>	56.0	8	9.0 19.0 <sup>3)</sup>	M6	G 1/8x8	152
65	R1620 611 30	124	20.0	16	90	75.7	8	18.0	M6	G 1/8x8	285
25/70 <sup>4)</sup>	R1670 211 40	99	19.0	16	35	29.6	8	8.4	M6	G 1/8x8	65
35/90 <sup>4)</sup>	R1670 311 30	129	19.0	16	50	42.0	8	9.5	M6	G 1/8x8	120

1) Not for ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)

2) Referred to the runner block mounting face

3) For ball runner blocks S.H (slimline, ..., high)

4) Wide Ball Rail System



Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks


## Front Lube Unit

For travel up to 10,000 km without relubrication

### Advantages during mounting and service


- Up to 10,000 km travel without relubrication
- Only initial lubrication (with grease) of the runner block necessary
- Front lube units at both runner block ends
- Minimal lubricant loss
- Reduced oil consumption
- No lube lines
- Max. operating temperature 60 °C
- In-service refilling possible using lube nipple on end face or at side
- Lube port on end face of the front lube unit suitable for lubricating runner block with grease

Standard Ball Runner Block with two Front Lube Units

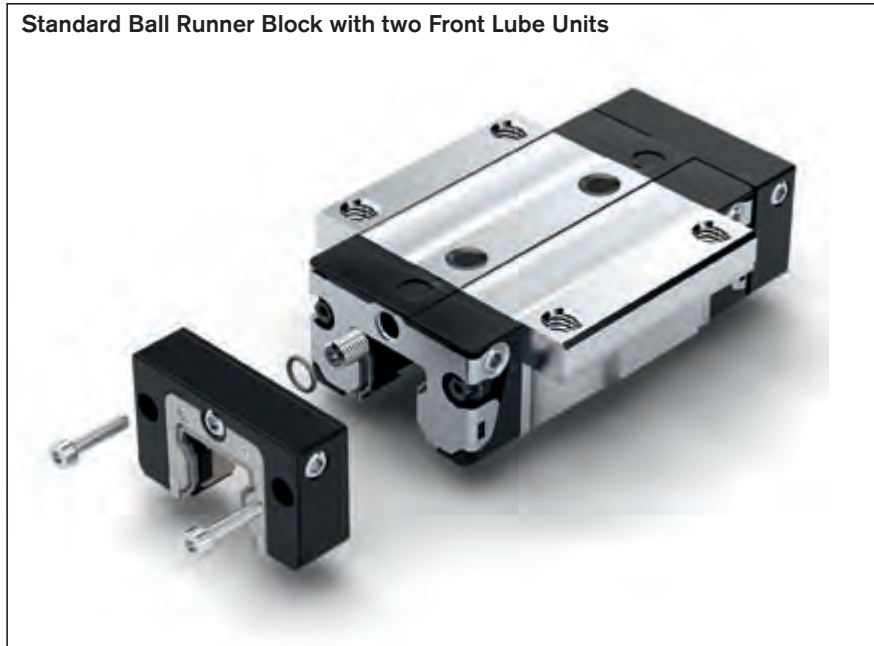

Size	Possible travel s with front lube units (km)
15	10 000
20	10 000
25	10 000
30	10 000
35	10 000
45	10 000
55	1 500
65	1 000

Table 1

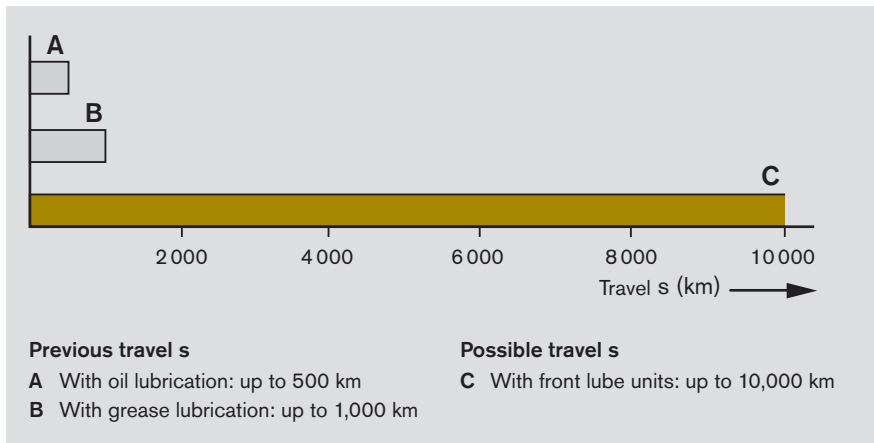


### Oil consumption comparison for size 25

Front lube units	Lubricant quantity per lubrication cycle (cm <sup>3</sup> )	Travel s (km)	Lubricant consumption	
			absolute (cm <sup>3</sup> /km)	comparative (%)
without	1.2	20	0.06	100.00
with	5.2	5 000	0.00104	1.73

### Lubricant distribution

Specially designed lube distribution ducts ensure that the lubricant is applied only where needed: directly to the raceways and to the guide rail top surface.

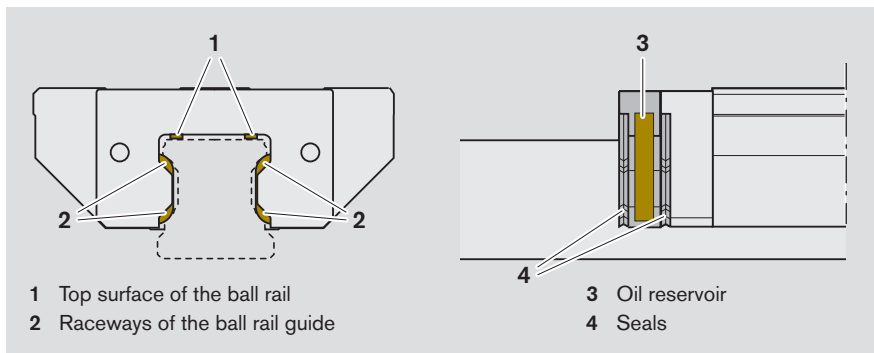

### Front Lube Unit R1619 .2. 00

Material: special plastic

Front lube units R1619 .2. 00 are supplied ready-filled with oil (Mobil SHC 639) and can be mounted immediately after greasing the runner block.

### Front Lube Unit R1619 .2. 10

Material: special plastic


Front lube units R1619 .2. 10 are supplied unfilled.

#### Recommended oil lubricant for initial filling:

- Mobil SHC 639  
(viscosity 1000 mm<sup>2</sup>/s at 40 °C)

**⚠** Before mounting the front lube units, always lubricate the runner blocks first using grease!  
🔧 245

**⚠** If other types of oil are used, please check the compatibility of the lubricants and the possible travel!

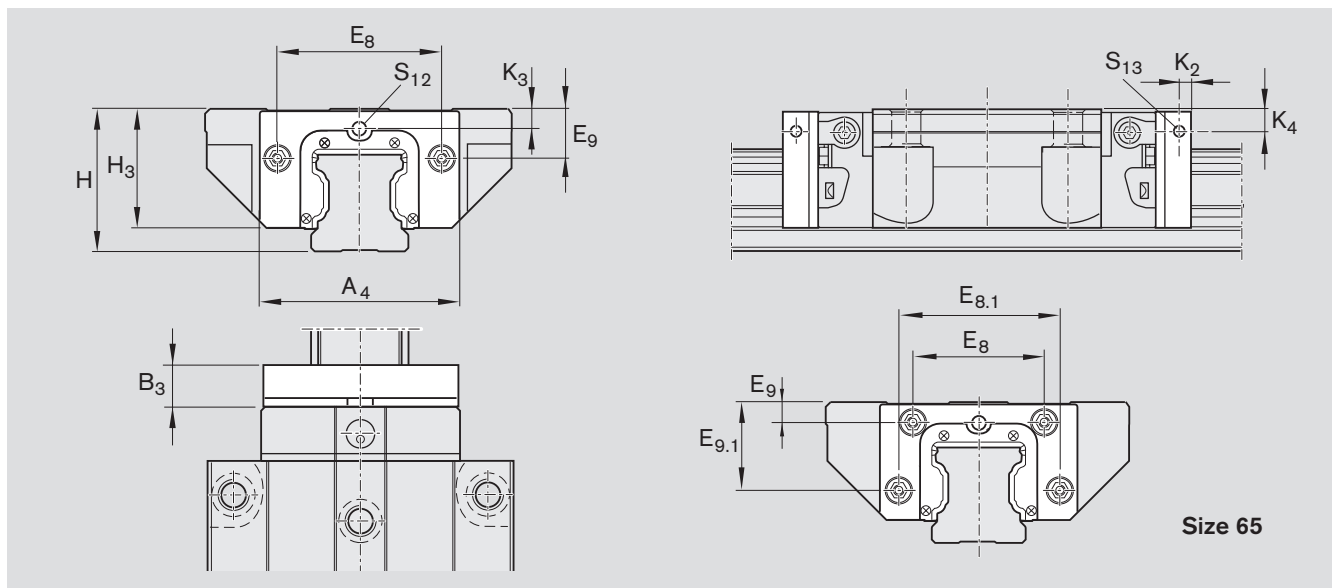

Size	Part number	Dimensions (mm)												Oil (cm <sup>3</sup> )	Weight (g)
		A <sub>4</sub>	B <sub>3</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub> <sup>2)</sup>	E <sub>9.1</sub> <sup>2)</sup>	H	H <sub>3</sub> <sup>2)</sup>	K <sub>2</sub>	K <sub>3</sub> <sup>2)</sup> /K <sub>4</sub> <sup>2)</sup>	S <sub>12</sub>	S <sub>13</sub>		
15	R1619 125 00	31.8	11.5	24.55	-	6.70	-	24	19.40	5	3.35	M3	M3	1.00	15
20	R1619 825 00	43.0	12.5	32.50	-	7.30	-	30	24.90	5	3.70	M3	M3	2.20	20
	R1619 826 00 <sup>1)</sup>	41.0	12.5	30.50	-	5.60	-	28	22.90	-	3.10	-	M3	1.80	20
25	R1619 225 00	47.0	13.0	38.30	-	11.50	-	36	29.30	5	5.50	M6	M6	2.60	25
	R1619 226 00 <sup>1)</sup>	47.0	13.0	38.30	-	8.50	-	33	26.30	5	4.10	M3	M3	2.50	25
30	R1619 725 00	58.8	14.5	48.40	-	14.60	-	42	35.05	6	6.05	M6	M6	3.85	35
						17.60 <sup>3)</sup>		45 <sup>3)</sup>	38.05 <sup>3)</sup>		9.05 <sup>3)</sup>				
35	R1619 325 00	69.0	16.0	58.00	-	17.35	-	48	39.85	6	6.90	M6	M6	5.70	50
						24.35 <sup>3)</sup>		55 <sup>3)</sup>	46.85 <sup>3)</sup>		13.90 <sup>3)</sup>				
45	R1619 425 00	84.0	17.0	69.80	-	20.90	-	60	49.80	7	8.20	M6	M6	9.60	70
						30.90 <sup>3)</sup>		70 <sup>3)</sup>	59.80 <sup>3)</sup>		18.20 <sup>3)</sup>				
55	R1619 525 00	99.0	18.0	80.00	-	22.30	-	70	57.05	8	8.90	M6	M6	14.50	90
						32.30 <sup>3)</sup>		80 <sup>3)</sup>	67.05 <sup>3)</sup>		18.90 <sup>3)</sup>				
65	R1619 625 00	124.2	19.0	76.00	100	11.00	53.5	90	75.70	8	16.00	M8	M8	30.00	130

1) For ball runner blocks F.N (flanged, ..., low profile) and S.N (slimline, ..., low profile)

2) Referred to the runner block mounting face

3) For ball runner blocks S.H (slimline, ..., high)

Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks

## Initial filling of a front lube unit shipped without oil

- Remove the set screw from the lube hole (Fig. 1, item 1) and keep it ready for later use.
- Screw in lube nipple (2).
- Lay the front lube unit (3) down flat and fill with the oil quantity specified in Table 2. Leave to settle for approx. 36 hours.
- Check whether the lube insert is completely soaked with oil.
- If necessary, add oil.
- Remove lube nipple.
- Screw in the set screw.
  
- For size 20 low profile: Stand the front lube unit in 10 mm of oil for approx. 36 hours (see Fig. 2)

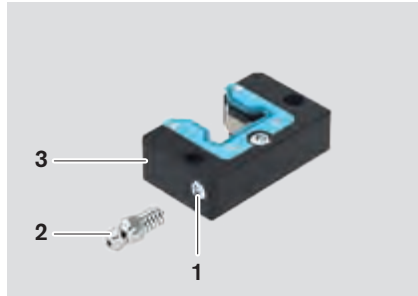


Fig. 1

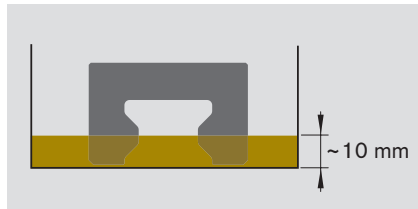


Fig. 2

Size	Oil quantity for initial filling of an unfilled front lube unit (cm <sup>3</sup> )
15	0.90
20	2.00
25	2.40
30	3.85
35	5.70
45	9.60
55	14.50
65	30.00

Table 2

## Relubrication of front lube units

- When the relubrication interval according to Graph 1 has been reached, add the relubrication quantity according to Table 2.
- The units can be relubricated through the lube port at the side.
- The size 20 low-profile front lube unit **cannot** be refilled through the lube port (see Fig. 2).

### Note

Rexroth recommends replacing the front lube units every 3 years at the latest and regreasing the runner blocks before mounting the new front lube units.

## Relubrication of runner blocks

In clean operating environments, the runner blocks can be relubricated with grease (Dynalub 510) from the end face.

**⚠ Relubrication of ball runner blocks with grease lubricant.** 246

**⚠ If other types of lubricants are used, this may lead to a reduction in the relubrication intervals, the achievable travel in short-stroke applications, and the load capacities. Possible chemical interactions between the plastic materials, lubricants and preservative oils must also be taken into account.**

**⚠ The recommended in-service lubrication intervals depend on environmental factors, load and type of loading.** Typical environmental factors include fine metal particles, mineral and similar abraded material, solvents, and temperature. Load types include vibrations, impacts and tilting.


**⚠ The service conditions are unknown to the manufacturer. Users can only determine the in-service lubrication intervals with certainty by conducting their own in-house tests or by close observation.**

**⚠ Do not allow ball guide rails or runner blocks to come into contact with water-based metalworking fluids!**

**Load-dependent relubrication intervals for ball runner blocks with front lube units**

**The following conditions apply:**

- Lubricants for runner blocks:  
Dynalub 510 (grease NLGI 2)  
or alternatively  
Castrol Longtime PD 2  
(grease NLGI 2)
- Lubricant for front lube units:  
Mobil SHC 639 (synthetic oil)
- Maximum speed:  
 $v_{max} = 2 \text{ m/s}$
- No exposure to metalworking fluids
- Standard seals
- Ambient temperature:  
 $T = 20 - 30 \text{ }^\circ\text{C}$

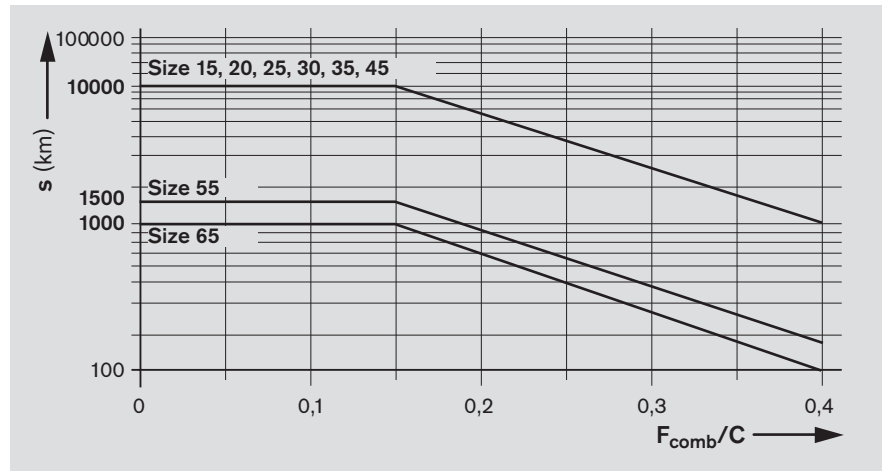

Graph 1

**Key to graph**

- C = dynamic load capacity (N)
- $F_{comb}$  = combined equivalent dynamic load on bearing (N)
- $F_{comb}/C$  = load ratio (-)
- s = relubrication interval expressed as travel (km)

**Definition of  $F_{comb}/C$**

The load ratio  $F_{comb}/C$  is the quotient of the equivalent dynamic load on the bearing at the combined dynamic load on the bearing  $F_{comb}$  (taking account of the internal preload force  $F_{pr}$ ) divided by the dynamic load capacity  $C$  8 - 9.

**Mounting of front lube units**

**Notes for mounting**

All required mounting accessories (coated screws, seals and lube nipples) are supplied along with the units.

**⚠ Mount a front lube unit at each end of the ball runner block (Fig. 3, item 3)!**

**⚠ Do not remove the runner block from the rail!**

**Ball runner blocks up to size 45 (Fig. 3a):**

**⚠ The lube pin (2) must be mounted between the lubrication plate and the ball runner block! (The pin contains a lube bore.)**



- Remove set screw (1).
- Screw in lube pin (2).
- Push on front lube unit (3).
- Insert O-ring (5) between runner block and front lube unit.
- Tighten screws (4) with tightening torque  $M_A$  (see Table 3).

**Ball runner blocks from size 55 (Fig. 3b):**

- Push on front lube unit (3).
- Remove set screw (1) and insert O-ring (5) between runner block and front lube unit.
- Tighten screws (4) with tightening torque  $M_A$  (see Table 3).

Size	Item 4	Tightening torque $M_A$ (Nm)
15	M2.5 x 12	0.3
20	M3 x 14	0.6
25	M3 x 14	0.6
30	M3 x 14	1.2
35	M3 x 16	1.2
45	M4 x 18	1.6
55	M5 x 18	2.0
65	M4 x 20	1.6

Table 3

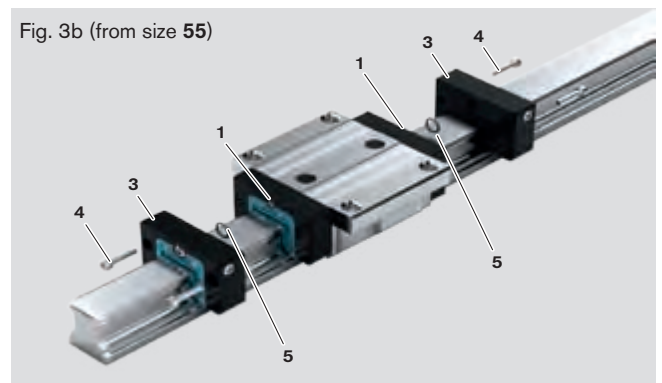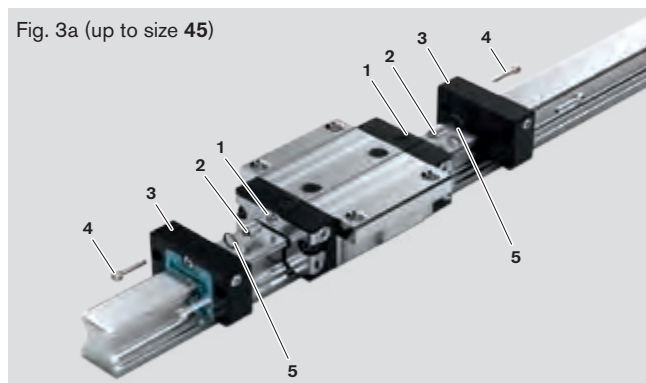

Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks

## Standard bellows R1620 .0. 00


- Material: polyurethane-coated polyester fabric
- Aluminum lube plate




## Heat resistant bellows R1620 .5. 00

- Material: Nomex fabric, metallized on both sides

### Temperature resistance

- Non combustible, non flammable
- Resistant to sparks, welding spatter and hot chips.
- The protective metal coating can withstand peak temperatures of up to 200 °C.
- Operating temperature for the entire bellows: max. 80 °C.

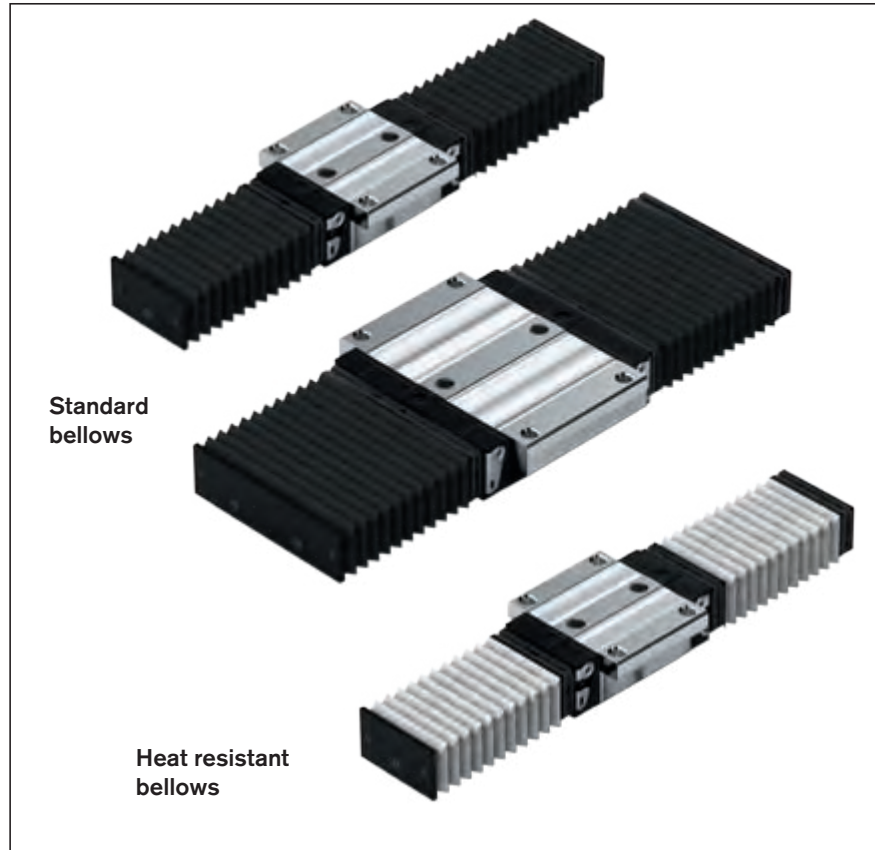




Size	Part number, no. of folds		
	 Type 1: with lubrication plate <sup>1)</sup> and end plate Type 6: with VSE <sup>2)</sup> and end plate	 Type 2: with mounting frame and end plate	 Type 3: with 2 lubrication plates <sup>1)</sup> Type 7: with 2 VSE <sup>2)</sup>
	<b>Standard bellows</b>		
15	R1620 10. 00, ...	R1620 102 00, ...	R1620 10. 00, ...
20	R1620 80. 00, ...	R1620 802 00, ...	R1620 80. 00, ...
25	R1620 20. 00, ...	R1620 202 00, ...	R1620 20. 00, ...
30	R1620 70. 00, ...	R1620 702 00, ...	R1620 70. 00, ...
35	R1620 30. 00, ...	R1620 302 00, ...	R1620 30. 00, ...
45	R1620 40. 00, ...	R1620 402 00, ...	R1620 40. 00, ...
55	R1620 50. 00, ...	R1620 502 00, ...	R1620 50. 00, ...
65	R1620 60. 00, ...	R1620 602 00, ...	R1620 60. 00, ...
20/40 <sup>3)</sup>	-	R1670 502 00, ...	-
25/70 <sup>3)</sup>	-	R1670 202 00, ...	-
35/90 <sup>3)</sup>	-	R1670 302 00, ...	-
	<b>Heat resistant bellows</b>		
25	R1620 25. 00, ...	R1620 252 00, ...	R1620 25. 00, ...
30	R1620 75. 00, ...	R1620 752 00, ...	R1620 75. 00, ...
35	R1620 35. 00, ...	R1620 352 00, ...	R1620 35. 00, ...
45	R1620 45. 00, ...	R1620 452 00, ...	R1620 45. 00, ...
55	R1620 55. 00, ...	R1620 552 00, ...	R1620 55. 00, ...
65	R1620 65. 00, ...	R1620 652 00, ...	R1620 65. 00, ...

Weight on request

1) Lubrication plate **not required** for ball runner blocks with side lube ports

2) VSE = front lube unit

3) Wide Ball Rail System

Size	Part number, no. of folds		
	 Type 4: with 2 mounting frames	 Type 5: with lubrication plate <sup>1)</sup> and mounting frame Type 8: with VSE <sup>2)</sup> and mounting frame	 Type 9: loose supply (spare part)
<b>Standard bellows</b>			
15	R1620 104 00, ...	R1620 10. 00, ...	R1600 109 00, ...
20	R1620 804 00, ...	R1620 80. 00, ...	R1600 809 00, ...
25	R1620 204 00, ...	R1620 20. 00, ...	R1600 209 00, ...
30	R1620 704 00, ...	R1620 70. 00, ...	R1600 709 00, ...
35	R1620 304 00, ...	R1620 30. 00, ...	R1600 309 00, ...
45	R1620 404 00, ...	R1620 40. 00, ...	R1600 409 00, ...
55	R1620 504 00, ...	R1620 50. 00, ...	R1600 509 00, ...
65	R1620 604 00, ...	R1620 60. 00, ...	R1600 609 00, ...
20/40 <sup>3)</sup>	R1670 504 00, ...	–	R1670 509 00, ...
25/70 <sup>3)</sup>	R1670 204 00, ...	–	R1670 209 00, ...
35/90 <sup>3)</sup>	R1670 304 00, ...	–	R1670 309 00, ...
<b>Heat resistant bellows</b>			
25	R1620 254 00, ...	R1620 25. 00, ...	R1600 259 00, ...
30	R1620 754 00, ...	R1620 75. 00, ...	R1600 759 00, ...
35	R1620 354 00, ...	R1620 35. 00, ...	R1600 359 00, ...
45	R1620 454 00, ...	R1620 45. 00, ...	R1600 459 00, ...
55	R1620 554 00, ...	R1620 55. 00, ...	R1600 559 00, ...
65	R1620 654 00, ...	R1620 65. 00, ...	R1600 659 00, ...

Weight on request

1) Lubrication plate **not required** for ball runner blocks with side lube ports

2) VSE = front lube unit

3) Wide Ball Rail System

#### Ordering example:

- Bellows
- Size 35
- Standard
- Type 6: with FLU and end plate
- number of folds: 36

Example: R1620 3 0 6 00, 36 folds

Standard = 0

Heat = 5

resistant

Type 1 - 9


Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks

## Bellows

### Notes for mounting

- The bellows are delivered pre-assembled.
- The assembly comes complete with mounting screws.
- Bellows with lube plate (Type 1, 3 - 5)  
 Sizes 15 - 20:  
 A funnel-type lube nipple with knock-in spigot is supplied.
- Sizes 25 - 65 and wide version:  
 The runner block lube nipple can be used.
- For types 1 and 2, thread size M4 x 10 mm deep and countersunk 2 x 45° must be tapped in each end face of the SNS ball guide rail. For ball guide rail BNS: tap two threads at each end face.
- Follow the mounting instructions.

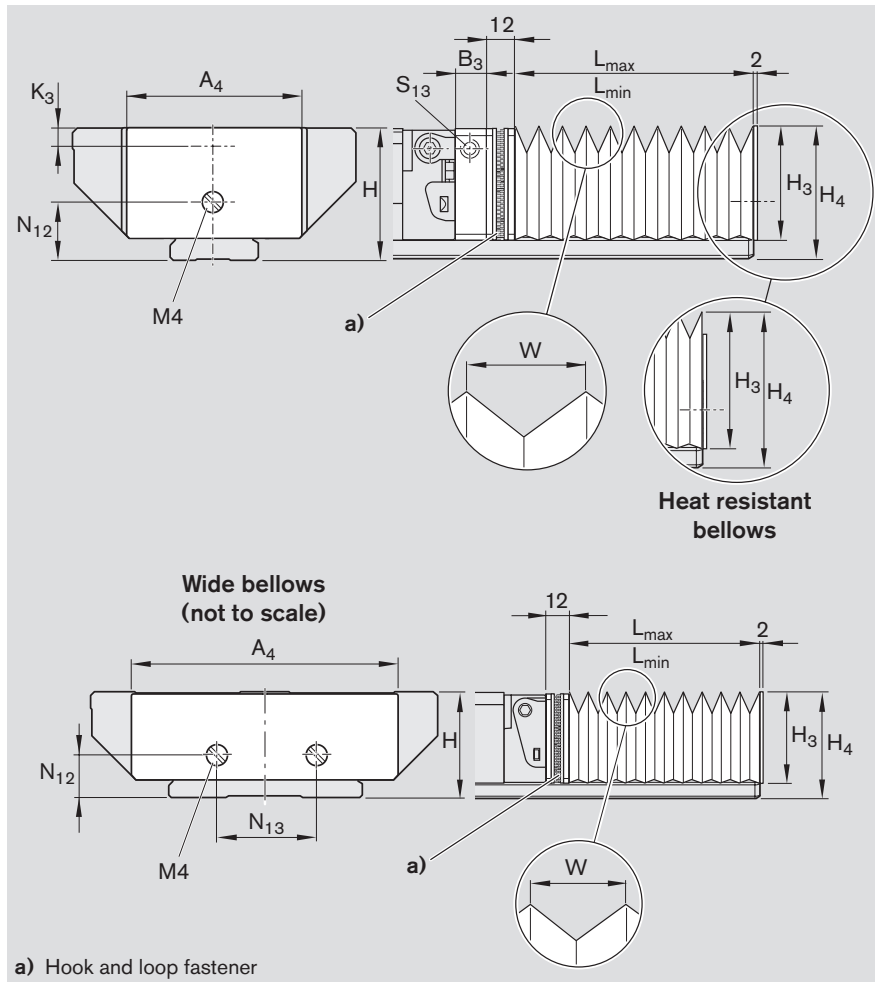

### Standard bellows


Size	Dimensions (mm)											Factor U
	A <sub>4</sub>	B <sub>3</sub>	H	H <sub>3</sub>	H <sub>4</sub>	K <sub>3</sub>	N <sub>12</sub>	N <sub>13</sub>	S <sub>13</sub>	W		
15	45	11	24	26.5	31.5	3.4	11.0	-	M3	19.9	1.18	
20	42	12	30	24.0	29.2	3.5	13.0	-	M3	10.3	1.33	
25	45	12	36	28.5	35.0	6.0	15.0	-	M3	12.9	1.32	
30	55	12	42	34.0	41.0	8.0	18.0	-	M6	15.4	1.25	
35	64	12	48	39.0	47.0	8.0	22.0	-	M6	19.9	1.18	
45	83	12	60	49.0	59.0	8.0	30.0	-	M6	26.9	1.13	
55	96	12	70	56.0	69.0	9.0	30.0	-	M6	29.9	1.12	
65	120	14	90	75.0	89.0	18.0	40.0	-	M8x1	40.4	1.08	
20/40 <sup>1)</sup>	73	-	27	31.0	35.0	-	11.5	-	-	19.9	1.12	
25/70 <sup>1)</sup>	101	-	35	29.0	35.0	-	14.0	26	-	12.9	1.25	
35/90 <sup>1)</sup>	128	-	50	42.0	49.0	-	21.5	40	-	19.9	1.18	

### Heat resistant bellows

Size	Dimensions (mm)											Factor U
	A <sub>4</sub>	B <sub>3</sub>	H	H <sub>3</sub>	H <sub>4</sub>	K <sub>3</sub>	N <sub>12</sub>	N <sub>13</sub>	S <sub>13</sub>	W		
25	62	12	36	39.0	44.5	6.0	15	-	M6	25.9	1.25	
30	67	12	42	42.0	47.5	8.0	18	-	M6	25.9	1.25	
35	74	12	48	47.0	54.0	8.0	22	-	M6	29.9	1.21	
45	88	12	60	55.0	64.0	8.0	30	-	M6	32.9	1.18	
55	102	12	70	63.0	75.0	9.0	30	-	M6	37.9	1.16	
65	134	14	90	86.0	99.0	18.0	40	-	M8x1	52.4	1.11	

1) Wide Ball Rail System

## Calculations

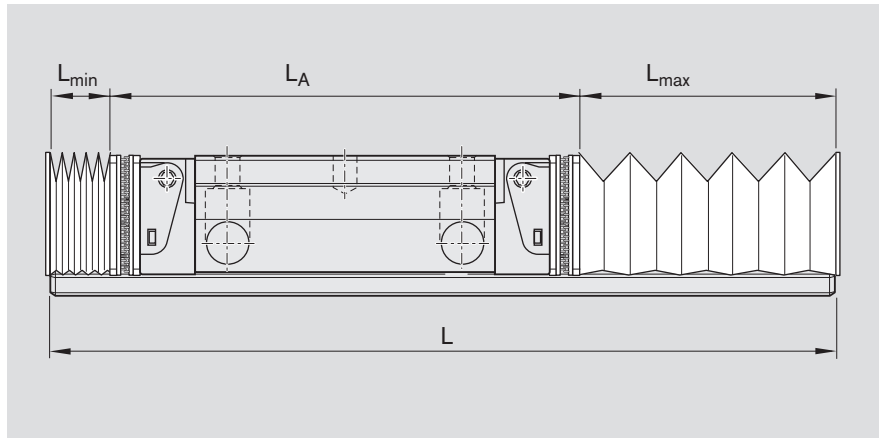

## Bellows

$$L_{\max} = (\text{stroke} + 30) \cdot U$$

$$L_{\min} = L_{\max} - \text{stroke}$$

$$\text{Number of folds} = \frac{L_{\max}}{W} + 2$$

$L_{\max}$  = bellows extended (mm)

$L_{\min}$  = bellows compressed (mm)

Stroke = stroke (mm)

U = calculation factor (-)

W = maximum extension (mm)

L = rail length (mm)

$L_A$  = length of runner block with mounting frame (mm)

## Ball guide rail length

$$L = L_{\min} + L_{\max} + L_A$$




Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks


## Lube Nipples

### Funnel-type lube nipple per DIN 3405

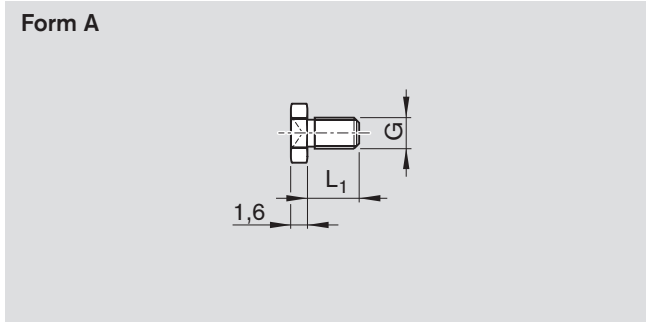


Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 029 09	M3	5	0.3
R3417 032 09 <sup>1)</sup>			

1) Lube nipple Resist NR II  
made of corrosion-resistant steel per EN 10088

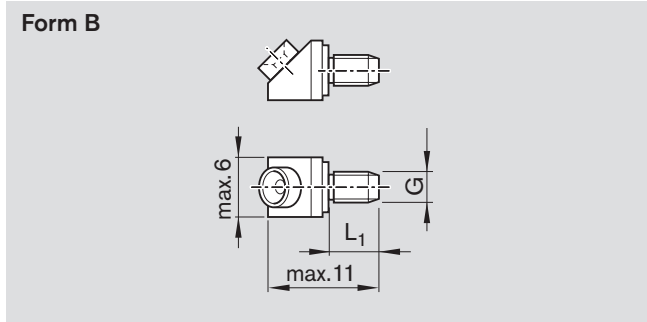

Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 004 09	M3	5	1.5


### Ball-type lube nipple

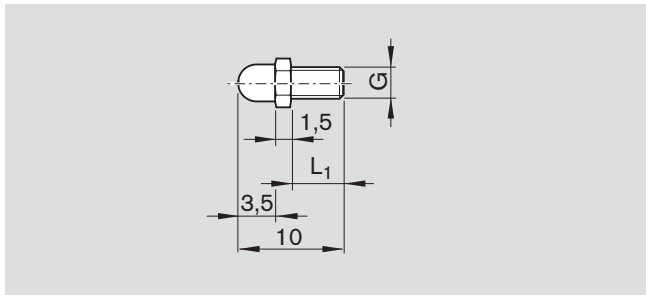

Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 005 01 <sup>2)</sup>	M3	5	0.5

2) Material: brass


### Hydraulic-type lube nipple per DIN 71412

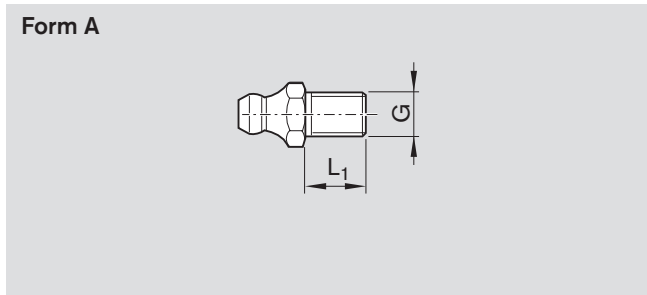


Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 008 02	M6	8	2.6
R3417 016 02 <sup>1)</sup>			

1) Lube nipple Resist NR II  
made of corrosion-resistant steel per EN 10088

### Hydraulic-type lube nipple per DIN 71412

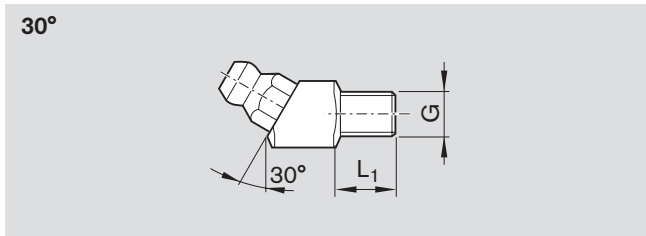

Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 023 02	M6	8	7.4

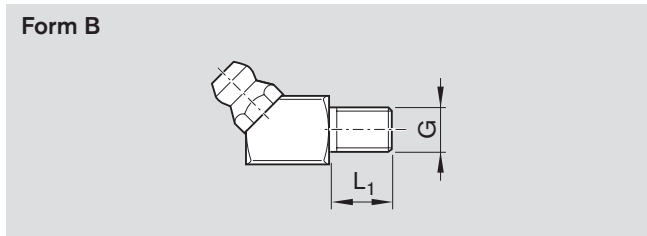

Part number	Dimensions (mm)		Weight (g)
	G	L <sub>1</sub>	
R3417 007 02	M6	8	7.4
R3417 006 02	M8x1	8	8.0

## Lube Fittings

### Plastic Hose for lube fittings


Plastic hose  $\varnothing$  3 mm



Part number	Dimensions			Weight (kg)
	Outside $\varnothing$ (mm)	Inside $\varnothing$ (mm)	Length (m)	
R3499 287 00	3	1.7	50	0.4

## O-rings

Part number	$d_1 \times d_2$ (mm)	Weight (g)
R3411 130 01	4 x 1.0	0.01
R3411 131 01	5 x 1.0	0.01
R3411 003 01	6 x 1.5	0.03

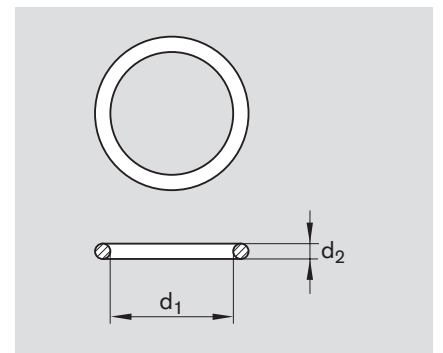


Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Runner Blocks

## Lube Fittings


### Reducers

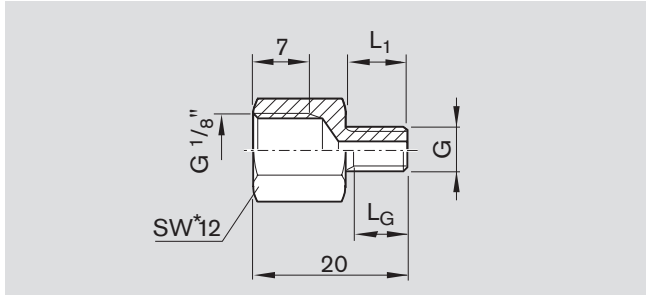


\* SW = width across flats

Part number	Dimensions (mm)			Weight (g)
	G	L <sub>1</sub>	L <sub>G</sub>	
R3455 030 34	M6	8	6.5	7.5

### Extension pieces

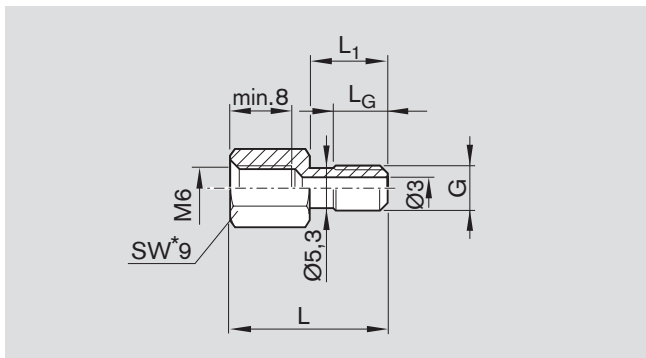


Part number	Dimensions (mm)				Weight (g)
	G	L	L <sub>1</sub>	L <sub>G</sub>	
R3455 030 69	M6	21.0	10.5	7	5.0
R3455 030 87	M6	25.0	14.5	8	5.5
R3455 030 85	M6	26.5	16.0	7	5.0

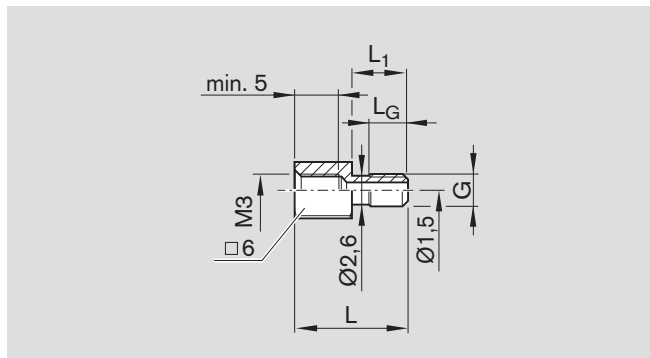


Part number	Dimensions (mm)				Weight (g)
	G	L	L <sub>1</sub>	L <sub>G</sub>	
R3455 030 78	M3	16.5	8.5	6	2.5

### Connectors

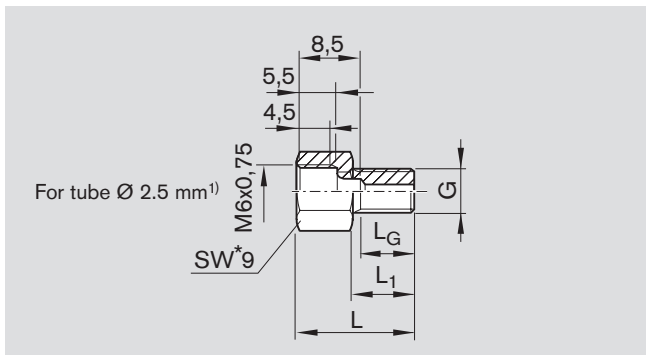


Part number	Dimensions (mm)				Weight (g)
	G	L	L <sub>1</sub>	L <sub>G</sub>	
R3455 030 38	M6	15.5	8	6.5	4.1

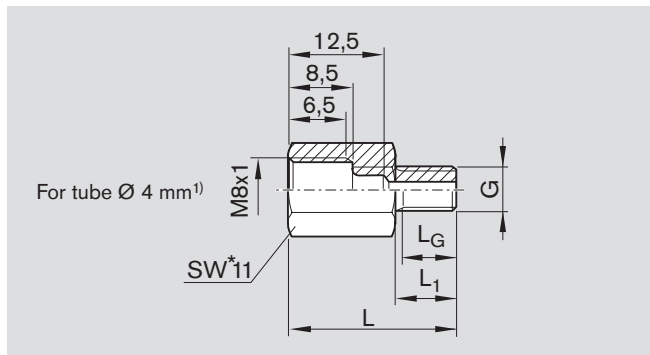

Part number	Dimensions (mm)				Weight (g)
	G	L	L <sub>1</sub>	L <sub>G</sub>	
R3455 030 37	M6	22	8	6.5	8.8

1) For connections as per DIN 2353 (solderless tube fittings)

Swivel fittings

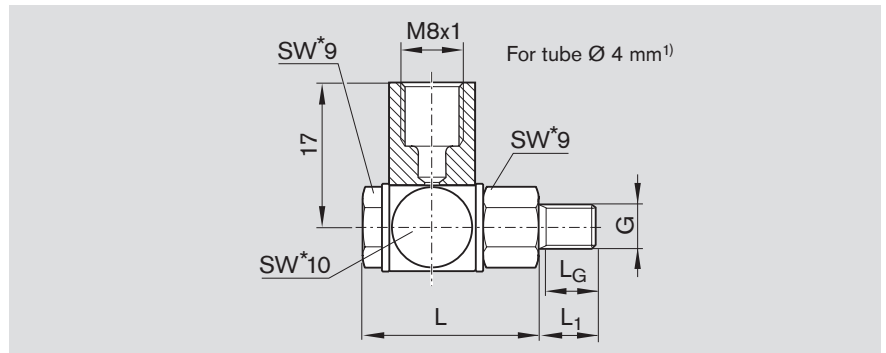


Part number	Dimensions (mm)				Weight (g)
	G	L	L <sub>1</sub>	L <sub>G</sub>	
R3417 018 09	M6	21.5	8	6.5	18.6

1) For connections as per DIN 2353 (solderless tube fittings)

Push-in fittings for plastic and metal tubes

**⚠** Not permitted for ball runner blocks with accessories attached to end face.

Straight connectors

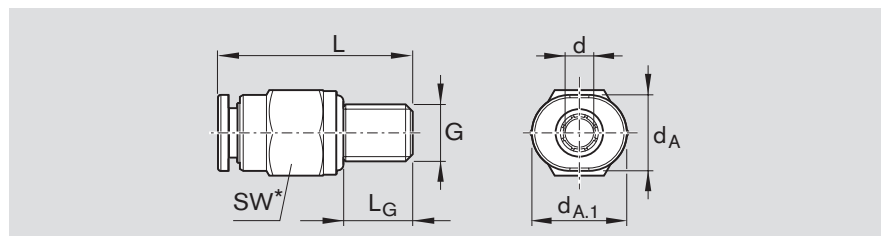


Part number	Dimensions (mm)							Weight (g)
	d <sub>A</sub>	d <sub>A.1</sub>	d±0.1	G	L	L <sub>G</sub>	SW*	
R3417 033 09	6.0	7	3	M3	15.5	5	6 <sup>1)</sup>	1.4
R3417 034 09	8.0	9	3	M5	18.0	5	8	3.5
R3417 035 09	8.5	10	4	M6	20.5	8	9	4.6
R3417 036 09	10.0	12	6	M6	21.5	8	10	4.8

1) Maximum tightening torque: M<sub>A</sub> = 0.5 Nm

\* SW = width across flats

Elbow couplings, rotatable<sup>1)</sup>

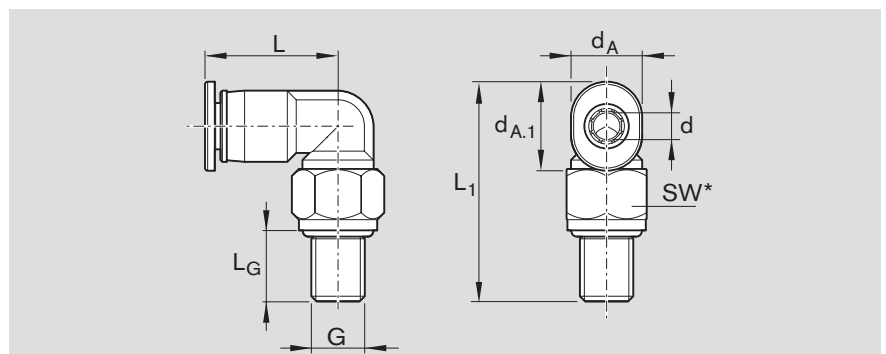

Part number	Dimensions (mm)									Weight (g)
	d <sub>A</sub>	d <sub>A.1</sub>	d±0.1	G	L	L <sub>1</sub>	L <sub>G</sub>	SW*		
R3417 037 09	6.0	7	3	M3	13.7	18.0	5	6 <sup>2)</sup>	1.7	
R3417 038 09	8.0	10	4	M6	19.5	24.7	8	9	5.1	
R3417 039 09	10.5	12	6	M6	20.0	25.0	8	9	6.1	

1) Maximum lubricant pressure: 30 bar (exerting slow pressure with manual grease gun)

2) Maximum tightening torque: M<sub>A</sub> = 0.5 Nm

Accessories for Ball Runner Blocks and Ball Guide Rails

## Product Description, Accessories for Ball Guide Rails


Rexroth offers limitless interchangeability as all ball guide rail versions can be combined at will with all accessories within each size.

The entire range is perfectly geared to provide top performance and to meet all special requirements.


### Overview of Accessories for Ball Guide Rails

Cover strip, separate  176




Expanding tool  177



Mounting kit for cover strip with mounting tool and lifting plate  177




Aluminum strip clamp  178




Plastic protective cap  178




Plastic mounting hole plug  179




Steel mounting hole plug  179



Two-piece mounting tool for steel mounting hole plugs  179



Wedge profile (not for BNS)  180



## Accessories for Ball Guide Rails

### Mounting instructions for rail cover strip

#### Secure the cover strip!

 178

- Follow the mounting instructions! Send for the “Mounting Instructions for the Cover Strip.”

#### Advantages

The cover strip is easy to clip on and remove.

- This considerably facilitates and speeds up the mounting process:
  - no need to plug each single hole.
  - no time delay while waiting for adhesive to harden when using adhesive tape.
- The cover strip can be mounted and removed (up to 4 times).



#### Versions and functions

##### A Snap-fit cover strip (standard)

- The cover strip is clipped on before the runner blocks are mounted and fits tightly.


##### B Sliding-fit cover strip

- For mounting or replacing a cover strip when the runner blocks or adjoining structure cannot be removed.
- A section of the snap-fit cover strip is very slightly widened and can then be easily slid under the runner blocks.

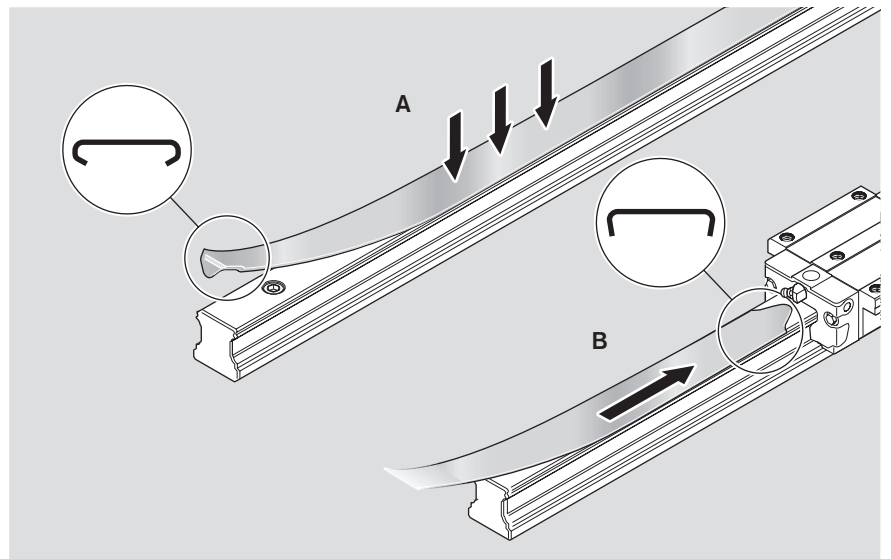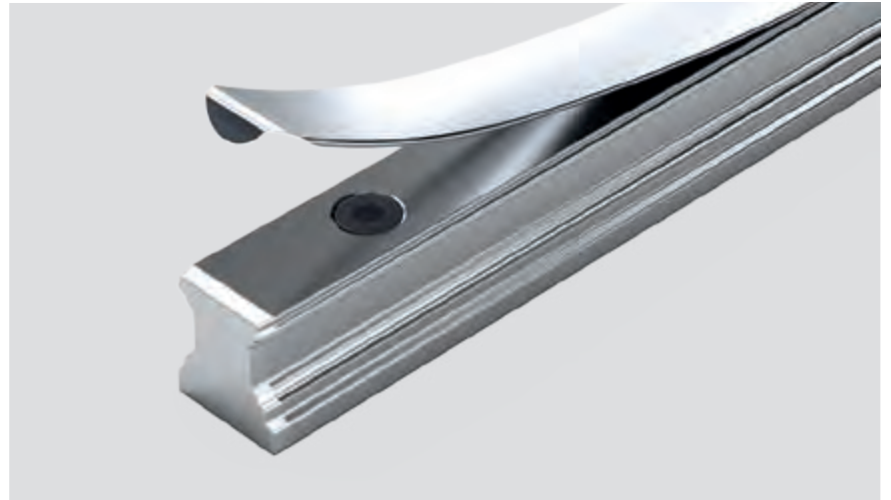


A special expanding tool can be used to create the sliding fit after a cover strip has been installed.

The main advantage is that the length  $L_S$  of the sliding fit can be optimized to suit the installation conditions.

 The cover strip is a precision-machined part that must be handled with great care. It must on no account be bent.

**Risk of injury at the edges and ends of the cover strip! Wear gloves!**

For part numbers, dimension drawing, dimensions and weights, see the following pages.

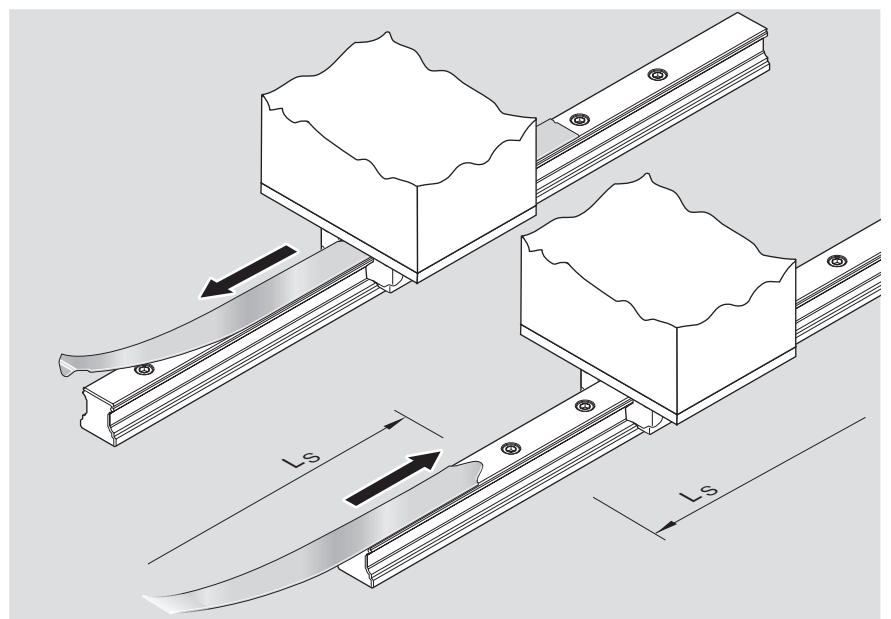

Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Guide Rails

## Cover Strip, Separate

For initial mounting, as spare part or as replacement part

**Note**

A matching cover strip (sliding or snap fit) can be supplied for each ball guide rail SNS.


**Ordering example 1 (Standard snap-fit cover strip)**

- Ball Guide Rail SNS
- Size 35
- Rail length L = 2696 mm

Part number:


**R1619 330 20, 2696 mm**

Standard snap-fit cover strip

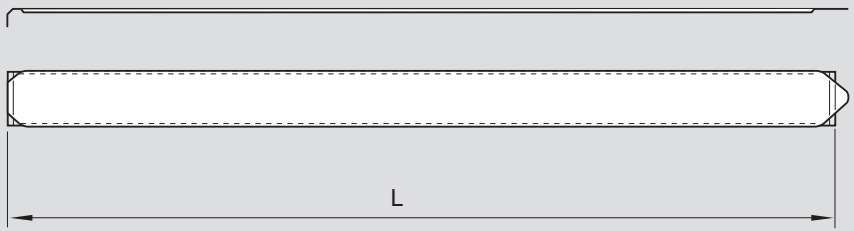

Size	Standard snap-fit cover strip Part number, rail length L (mm)	Weight (g/m)
15	R1619 130 00, ....	10
20	R1619 830 00, ....	29
25	R1619 230 00, ....	32
30	R1619 730 00, ....	40
35	R1619 330 20, ....	80
45	R1619 430 20, ....	100
55	R1619 530 20, ....	120
65	R1619 630 20, ....	148

Sliding-fit cover strip

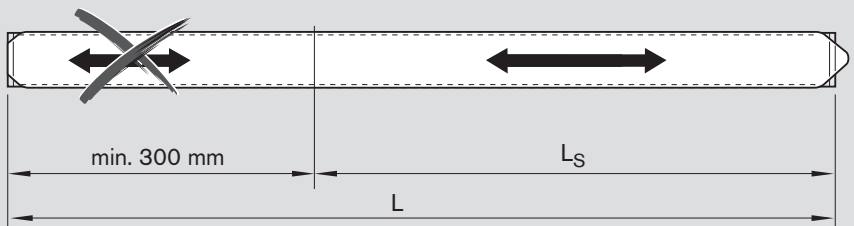

$L_S$  = sliding fit length (mm)  
 L = rail length (mm)

**Ordering example 2 (Sliding-fit cover strip)**

- Ball Guide Rail SNS
- Size 35
- Rail length L = 2696 mm
- Sliding fit length  $L_S$  = 1200 mm

Part number:

**R1619 330 30, 2696, 1200 mm**

Size	Sliding-fit cover strip Part number, rail length L (mm), Sliding fit length $L_S$ (mm)	Weight (g/m)
15	R1619 130 10, ....	10
20	R1619 830 10, ....	29
25	R1619 230 10, ....	32
30	R1619 730 10, ....	40
35	R1619 330 30, ....	80
45	R1619 430 30, ....	100
55	R1619 530 30, ....	120
65	R1619 630 30, ....	148

- Follow the mounting instructions!
- Send for the "Mounting Instructions for the Cover Strip."

## Expanding Tool

For creating a sliding fit in the cover strip




Size	Part number	Weight (g)
15	R1619 115 10	40
20	R1619 815 10	50
25	R1619 215 10	80
30	R1619 715 10	100
35	R1619 315 30	100
45	R1619 415 30	130
55	R1619 515 30	210
65	R1619 615 30	270

## Cover Strip Mounting Kit

Mounting tool and lifting plate

### Notes for mounting

- The kit comprises a mounting tool (A) for clipping on the cover strip and a lifting plate (B) for removing the cover strip.

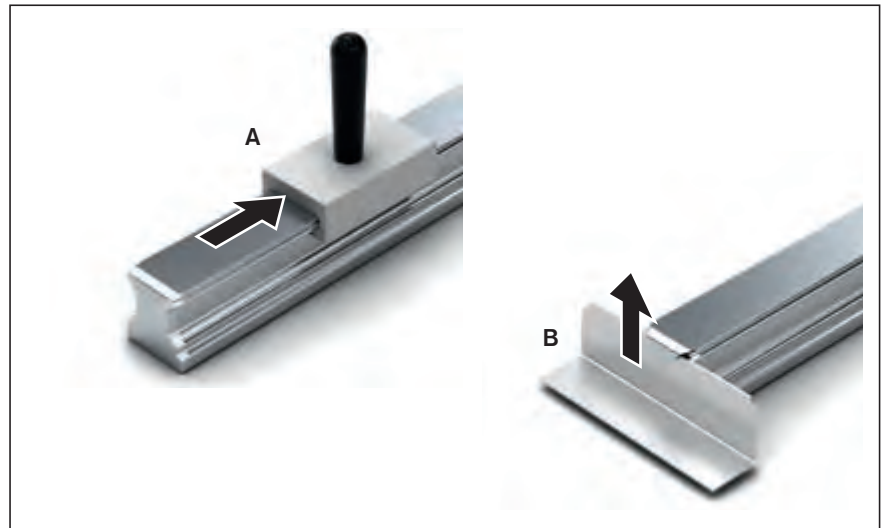

Size	Part number	Weight (g)
25	R1619 210 80	170
30	R1619 710 80	200
35	R1619 310 60	200
45	R1619 410 60	210
55	R1619 510 60	210
65	R1619 610 60	280

- Follow the mounting instructions!
- Send for the "Mounting Instructions for the Cover Strip."




Accessories for Ball Runner Blocks and Ball Guide Rails

## Accessories for Ball Guide Rails

### Parts for securing the cover strip

#### Notes for mounting

- Rexroth recommends the use of strip clamps to:
- prevent unintentional lifting of the strip and penetration of dirt,
- fix the cover strip in place.

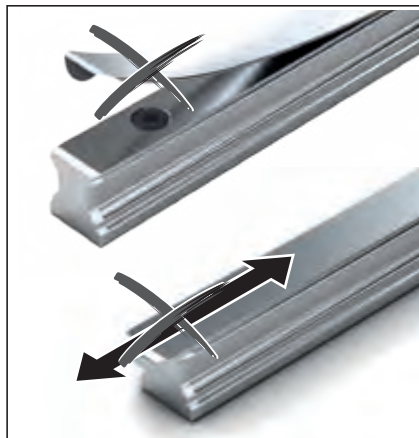

### Strip clamps

#### Material:

- Strip clamp made of anodized aluminum
- Clamping screw and nut made of corrosion-resistant steel per EN 10088

#### For ball guide rails without threaded holes at the end faces

Size	Set (2 pieces per unit)		Bulk pack (100 per unit)	
	Part number (unit)	Weight (g)	Part number (unit)	Weight (kg)
15	R1619 139 50	11	R1619 139 60	1.1
20	R1619 839 50	13	R1619 839 60	1.3
25	R1619 239 50	14	R1619 239 60	1.4
30	R1619 739 50	22	R1619 739 60	2.2
35	R1619 339 50	30	R1619 339 60	3.0
45	R1619 439 50	56	R1619 439 60	5.6
55	R1619 539 50	62	R1619 539 60	6.2
65	R1619 639 50	84	R1619 639 60	8.4

### Protective end caps

#### Material:

- Plastic protective cap, color black
- Screw made of corrosion-resistant steel per EN 10088
- Washer made of galvanized steel


#### For ball guide rails with threaded holes at the end faces

Size	Single cap		Set (2 pieces per unit with screws)		Bulk pack	
	Part number (without screws)	Weight (g)	Part number (unit)	Weight (g)	Part number/qty (without screws)	Weight (kg)
15	R1619 139 00	0.8	R1619 139 20	5.5	R1619 139 01 / 1000	0.8
20	R1619 839 00	0.9	R1619 839 20	6.0	R1619 839 01 / 1000	0.9
25	R1619 239 00	1.0	R1619 239 20	7.0	R1619 239 01 / 1000	1.3
30	R1619 739 00	1.7	R1619 739 20	9.0	R1619 739 01 / 1000	1.7
35	R1619 339 10	2.0	R1619 339 30	10.0	R1619 339 01 / 1000	2.5
45	R1619 439 00	4.0	R1619 439 20	13.0	R1619 439 01 / 700	2.6
55	R1619 539 00	4.0	R1619 539 20	20.0	R1619 539 01 / 500	2.1
65	R1619 639 00	6.0	R1619 639 20	20.0	R1619 639 01 / 300	1.7

## Accessories for Ball Guide Rails

### Plastic Mounting Hole Plugs

Size	Single plug Part number	Weight (g)
15	R1605 100 80	0.05
20	R1605 800 80	0.10
25	R1605 200 80	0.30
30	R1605 300 80	0.60
35	R1605 300 80	0.60
45	R1605 400 80	1.00
55	R1605 500 80	1.70
65	R1605 600 90	2.10
20/40	R1605 100 80	0.05
25/70	R1605 200 80	0.30
35/90	R1605 300 80	0.60

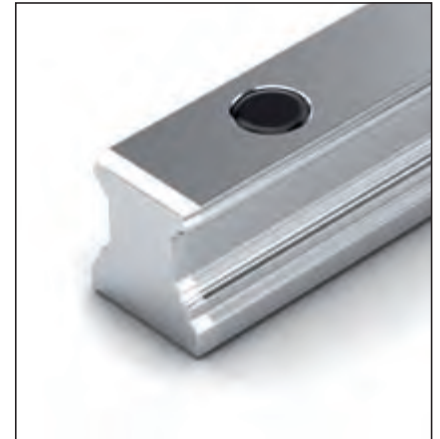


#### Notes for mounting

- Follow the mounting instructions! Send for the publication "Mounting Instructions for Ball Rail Systems."

### Steel Mounting Hole Plugs

Size	Single plug made of machining steel Part number	Weight (g)
25	R1606 200 75	2
30	R1606 300 75	3
35	R1606 300 75	3
45	R1606 400 75	6
55	R1606 500 75	8
65	R1606 600 75	9
25/70	R1606 200 75	2
35/90	R1606 300 75	3

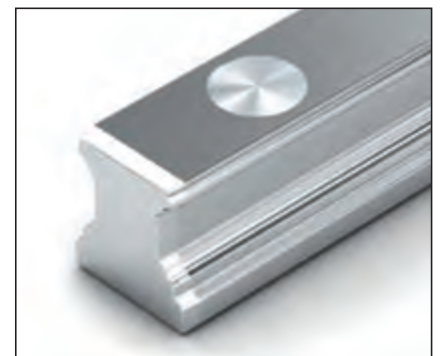

#### Notes on delivery and mounting

- Steel mounting hole plugs are not supplied with the guide rails.
- Order the mounting tool along with the plugs!
- Follow the mounting instructions! Send for the publication "Mounting Instructions for Ball Rail Systems."


### Mounting tool for steel mounting hole plugs

#### Two-piece, with instruction leaflet

The two-piece mounting tool is suitable for mounting plugs to a screwed down guide rail.

Size	Part number	Weight (kg)
25	R1619 210 00 <sup>1)</sup>	0.37
30	R1619 710 00 <sup>1)</sup>	0.37
35	R1619 310 10	0.57
45	R1619 410 10	0.85
55	R1619 510 10	1.50
65	R1619 610 00 <sup>1)</sup>	1.85
25/70	R1619 210 40	0.75
35/90	R1619 310 40	1.05

1) Only available as a one-piece unit

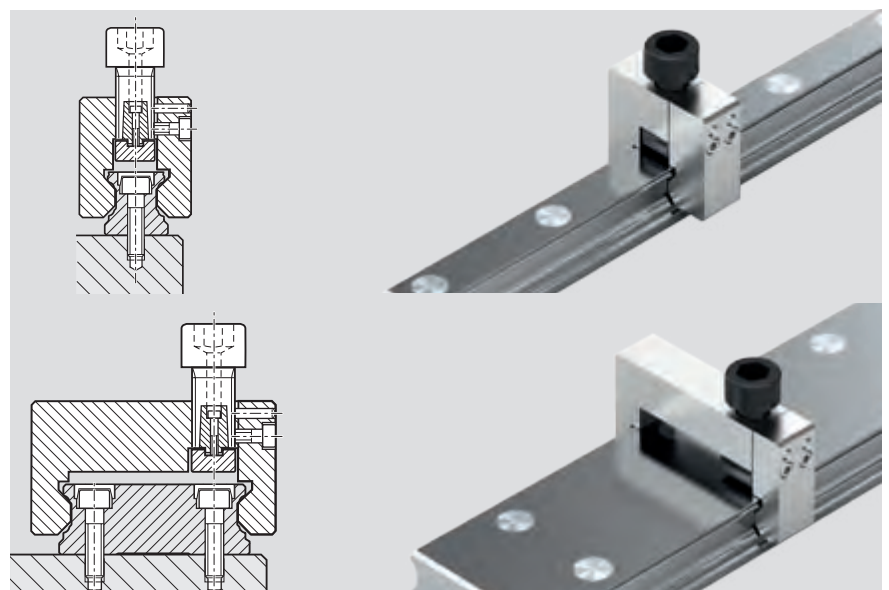

Accessories for Ball Runner Blocks and Ball Guide Rails

# Accessories for Ball Guide Rails



## Wedge Profile

### Lateral retention for Ball Guide Rails

- Material: steel
- Specification: black finished

### Notes for mounting

- Follow the mounting instructions!  
Send for the publication "Mounting Instructions for Ball Rail Systems."

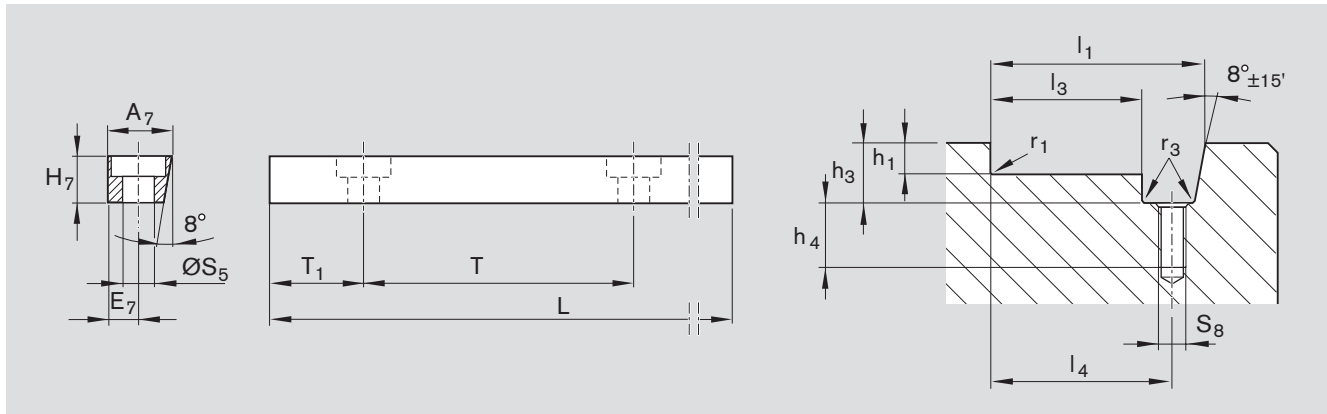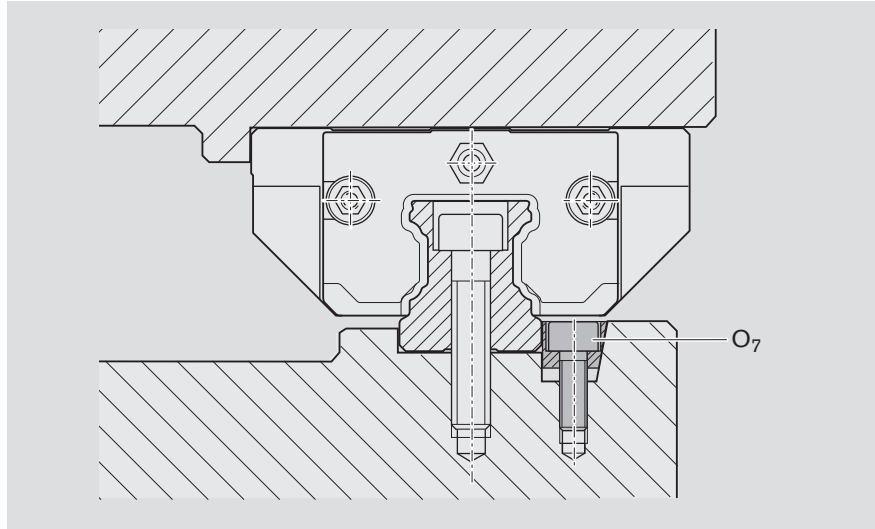

### Wedge profile

Size	Part number	Dimensions (mm)								Weight (kg)
		A <sub>7</sub>	E <sub>7</sub>	H <sub>7</sub>	L	O <sub>7</sub> <sup>1)</sup>	S <sub>5</sub>	T	T <sub>1</sub>	
15	R1619 200 01	12.0	6	10	957	M5x20	6.0	60	28.5	0.8
20										
25										
30										
35	R1619 400 01	19.0	9	16	942	M8x25	9.0	105	51.0	2.0
45										
55										
65										

1) Screw O<sub>7</sub> to DIN 6912

### Wedge profile groove

Size	Dimensions (mm)								
	h <sub>1-0.2</sub>	h <sub>3+1</sub>	h <sub>4+2</sub>	l <sub>1±0.05</sub>	l <sub>3-0.1</sub>	l <sub>4±0.1</sub>	r <sub>1 max</sub>	r <sub>3 max</sub>	S <sub>8</sub>
15	3.5	12.5	15	27	14.9	21	0.4	0.5	M5
20	4.0	12.5	15	32	19.9	26	0.5	0.5	M5
25	4.0	12.5	15	35	22.9	29	0.8	0.5	M5
30	5.0	12.5	15	40	12.9	34	0.8	0.5	M5
35	6.0	12.5	15	46	33.9	40	0.8	0.5	M5
45	8.0	19.0	16	64	44.9	54	0.8	0.5	M8
55	10.0	19.0	16	72	52.9	62	1.2	0.5	M8
65	10.0	19.0	16	82	62.9	72	1.2	0.5	M8



Accessories, Clamping and Braking Units

## Product Description, Accessories, Hydraulic Clamping and Braking Units

### Application areas

#### Clamping



- During installation work and while machine is stopped, **with** power when using KBH
- During installation work and while machine is stopped, **without** power when using KBHS
- Clamping of heavy handling systems
- Clamping of machine tables in heavy duty machining centers

#### Braking

- Auxiliary brake for linear motors
- Braking of heavy handling systems

### Characteristic features

- Very high axial holding forces
- Dynamic and static stabilization in the axis travel direction
- Heavy duty brake with spring energy accumulator

 **Follow the safety notes for Clamping and Braking Units.**  187

### Further highlights

- Up to 1 million clamping cycles
- Up to 2,000 emergency braking operations
- Threaded ports on both sides for connection of hydraulic circuit
- Solid, rigid steel housing, catalytically nickel-plated
- High positioning accuracy
- Release pressure 150 bar
- Integrated all-round sealing
- Special pressure diaphragm for high functional reliability without pressure losses or leakage
- Brake shoes with integrated contour-locking, large-surface contact profiles for maximum axial stiffness
- Super heavy duty model


#### Special features of KBH:

- Low oil displacement volume
- Compact design, compatible with DIN 645

#### Special features of KBHS:

- Clamping and braking in the event of a power failure
- Clamping and braking in the event of a pressure drop
- Reinforcing the E-Stop function
- Successor model to the KBH series
- To be used for new-build designs


## Model overview, Accessories, Hydraulic Clamping and Braking Units

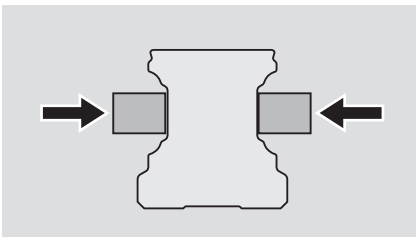KBH, FLS  184KBH, SLS  185KBHS  186

Hydraulic pressure: 50 - 150 bar (KBH)

**Clamping and braking by pressure application**


The large-surface clamping profiles are pressed directly against the free surfaces of the ball guide rail by the piston-type action of a hydraulic oil circuit.

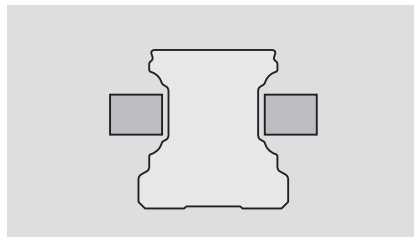

Hydraulic pressure: 0 bar (KBH)

**Release by spring action**

A preloaded return spring provides quick release.

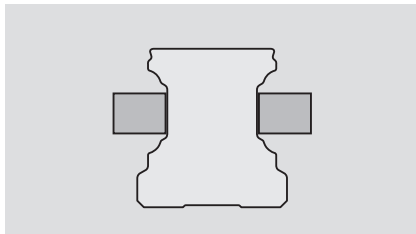


Hydraulic pressure: 0 bar (KBHS)

**Clamping and braking by spring action**

In the event of a power failure or pressure drop in the 3/2-way directional valve, the pre-tensioned spring plates force the oil out of the piston.

As the pressure drops, the expansion bolts integrated in the sides of the unit pull the brake shoes against the ball guide rail, thus initiating the braking process. A fast-acting 3/2-way directional valve (with spring return) ensures short braking distances.

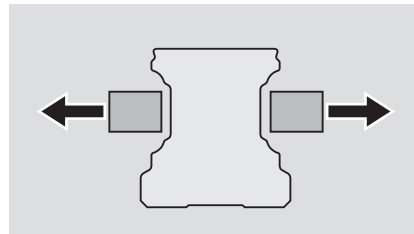

Hydraulic pressure: 150 bar (KBHS)

**Release by pressure application**

With an applied pressure of 150 bar, the piston located in the upper part of the unit housing presses the spring plates downwards. This forces the brake shoes away from the guide rail.

Accessories, Clamping and Braking Units

# Hydraulic Clamping and Braking Units KBH

**FLS**  
**Flanged, long, standard height**  
**R1619 .40 21**

**Lubrication notes**

- First filling with hydraulic oil HLP46.
- If other oils are used, check the compatibility.



**Note**

Can be used on all Ball Guide Rails SNS.

**⚠ Follow the safety notes for Clamping and Braking Units.** 187

**Clamping and braking by pressure application**

- Max. hydraulic operating pressure:
  - Size 25: 100 bar
  - Size 35 - 65: 150 bar
- Operating temperature range t: 0 - 70 °C

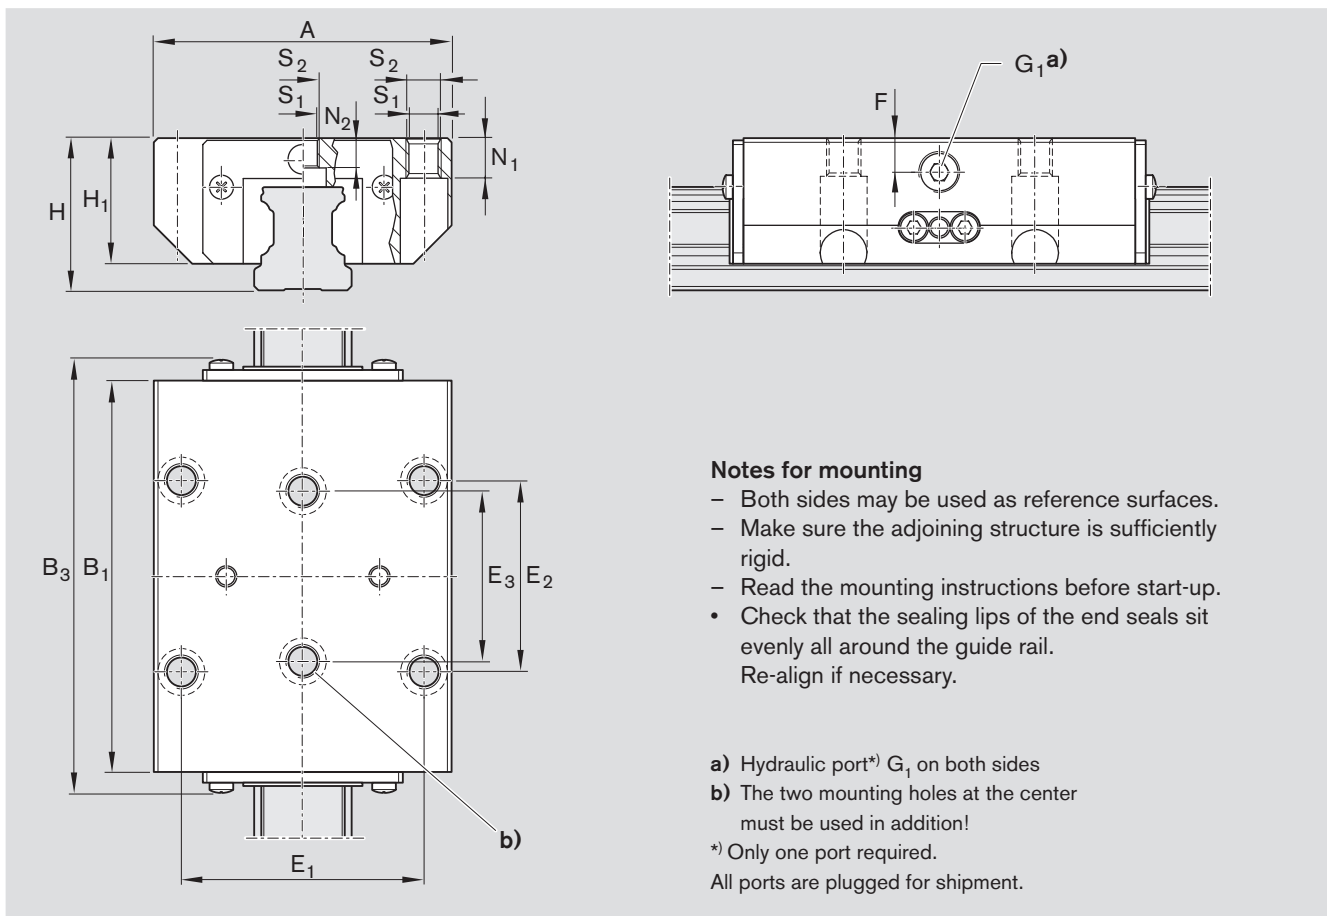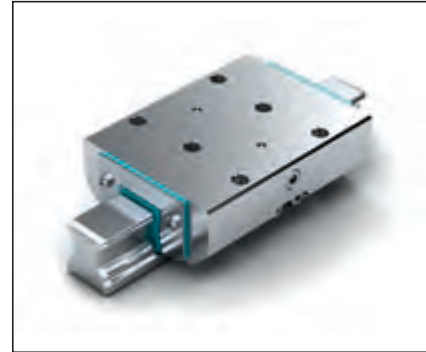

Size	Part number	Holding force <sup>1)</sup> (N)	Dimensions (mm)														Displacement <sup>6)</sup> (cm <sup>3</sup> )	Weight (kg)
			A	B <sub>1</sub>	B <sub>3 max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F	G <sub>1</sub>	N <sub>1</sub> <sup>4)</sup>	N <sub>2</sub> <sup>5)</sup>	S <sub>1</sub>	S <sub>2</sub>		
25	R1619 240 21	2 200 <sup>2)</sup>	70	92.0	102.3	36	29.5	57	45	40	8	1/8"	9	7.0	6.8	M8	0.6	1.10
35	R1619 340 21	5 700 <sup>3)</sup>	100	120.5	141.0	48	40.0	82	62	52	12	1/8"	12	10.2	8.6	M10	1.1	2.69
45	R1619 440 21	9 900 <sup>3)</sup>	120	155.0	178.0	60	50.0	100	80	60	15	1/8"	15	12.4	10.5	M12	1.8	5.20
55	R1619 540 21	13 700 <sup>3)</sup>	140	184.0	209.0	70	57.0	116	95	70	16	1/8"	18	13.5	12.5	M14	2.4	8.40
65	R1619 640 21	22 700 <sup>3)</sup>	170	227.0	264.0	90	76.0	142	110	82	20	1/4"	23	14.0	14.5	M16	3.8	17.30

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) At 100 bar

3) At 150 bar

4) For mounting from below with ISO 4762

5) For mounting from below with DIN 7984

6) Per clamping cycle

## SLS Slimline, long, standard height R1619 .40 20

### Note



Can be used on all Ball Guide Rails SNS.



### Clamping and braking by pressure application

- Max. hydraulic operating pressure:
  - Size 65: 150 bar
- Operating temperature range t:
  - 0 - 70 °C

### Lubrication notes

- First filling with hydraulic oil HLP46.
- If other oils are used, check the compatibility.

 Follow the safety notes for Clamping and Braking Units.  187

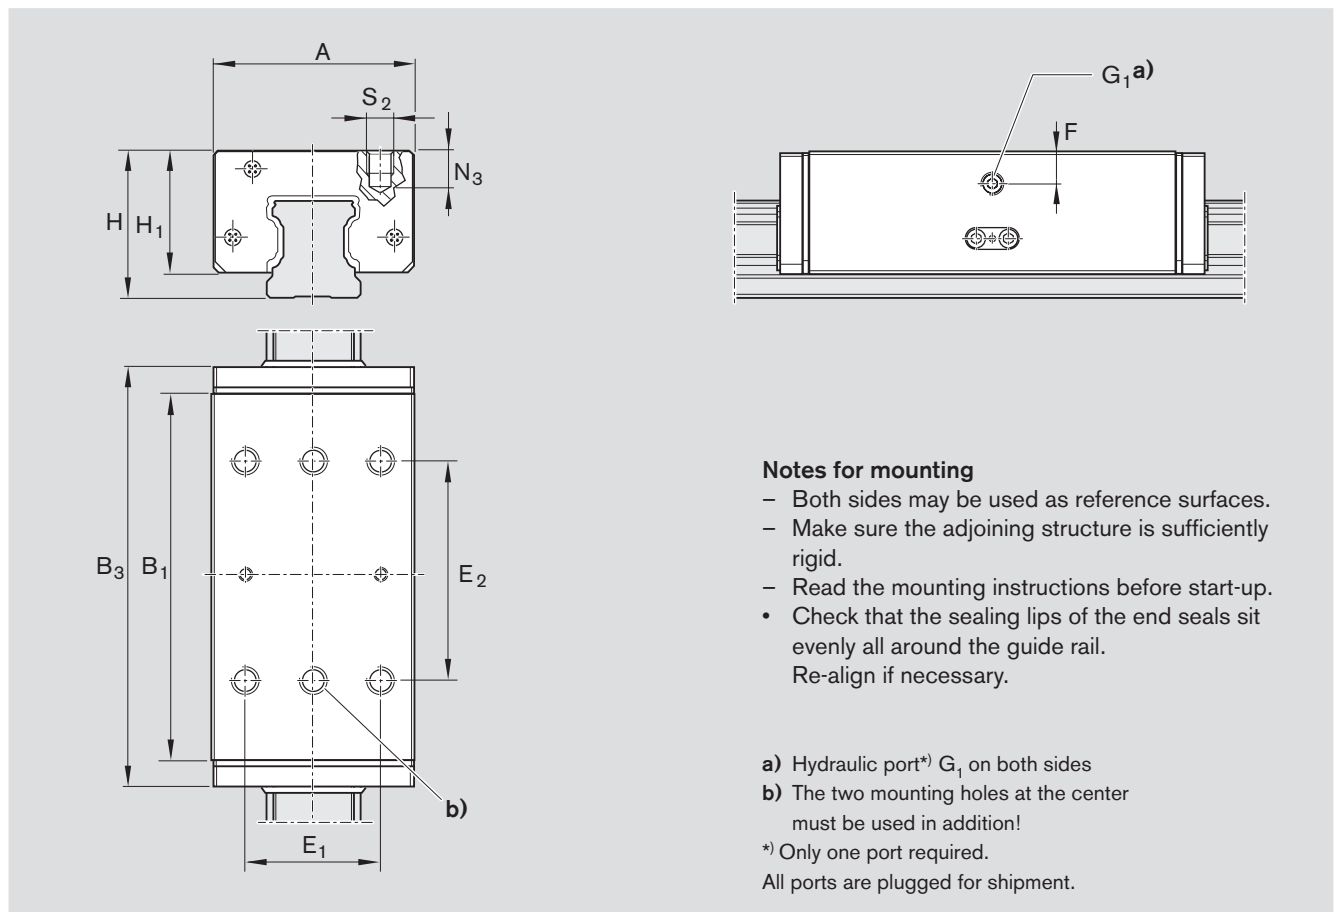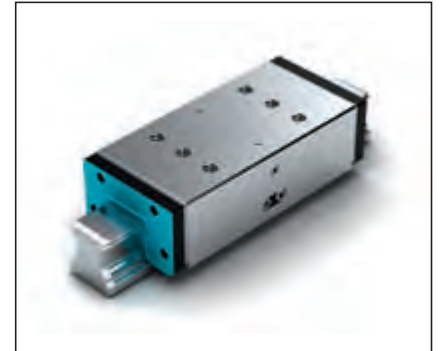

### Notes for mounting

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

a) Hydraulic port\*)  $G_1$  on both sides

b) The two mounting holes at the center must be used in addition!

\*) Only one port required.

All ports are plugged for shipment.

Size	Part number	Holding force <sup>1)</sup> (N)	Dimensions (mm)											Displacement <sup>3)</sup> (cm <sup>3</sup> )	Weight (kg)
			A	B <sub>1</sub>	B <sub>3 max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	F	G <sub>1</sub>	N <sub>3</sub>	S <sub>2</sub>		
65	R1619 640 20	22 700 <sup>2)</sup>	126	227	264	90	76	76	120	20	1/4"	21	M16	3.8	14.40

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) At 150 bar

3) Per clamping cycle




Accessories, Clamping and Braking Units

# Hydraulic Clamping and Braking Units KBHS

**FLS**  
**Flanged, long, standard height**  
**R1619 42 21**

**Note**  
 Can be used on all Ball Guide Rails SNS.


- Lubrication notes**
- First filling with hydraulic oil HLP46.
  - If other oils are used, check the compatibility.

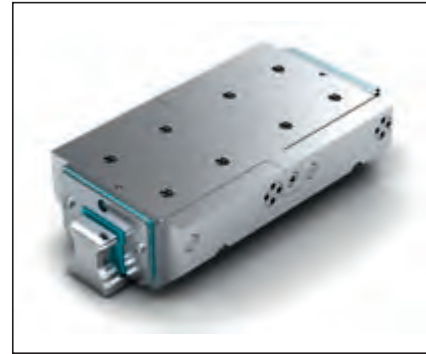

**Pressureless clamping and braking (spring energy)**

- Release pressure and max. hydraulic operating pressure:
  - Size 35: 160 bar
- Operating temperature range t:
  - 0 - 70 °C

**⚠ Follow the safety notes for Clamping and Braking Units.** 187

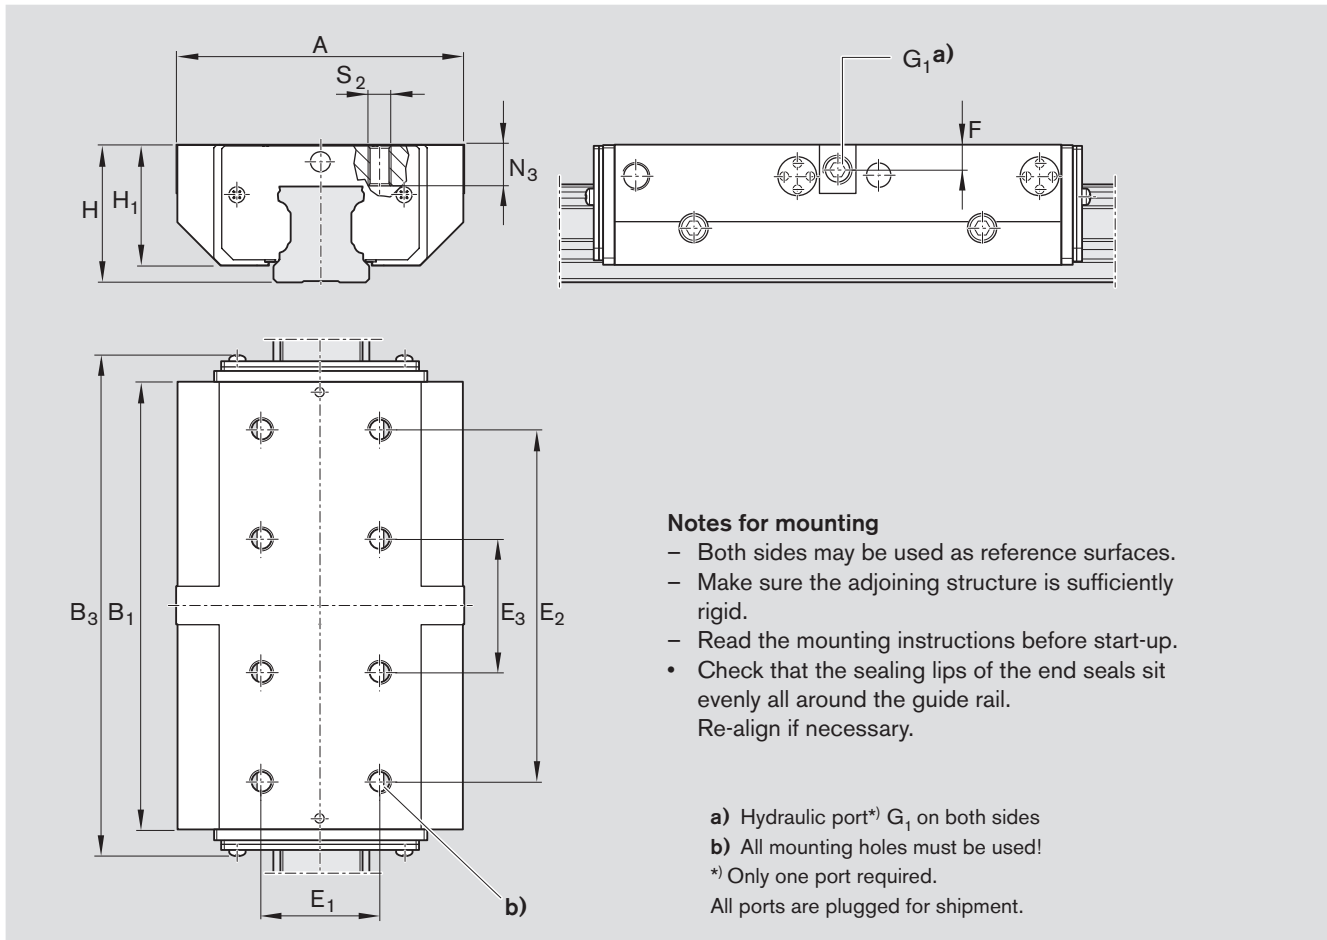

- Notes for mounting**
- Both sides may be used as reference surfaces.
  - Make sure the adjoining structure is sufficiently rigid.
  - Read the mounting instructions before start-up.
  - Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

- a) Hydraulic port\*) G<sub>1</sub> on both sides
  - b) All mounting holes must be used!
- \*) Only one port required.  
 All ports are plugged for shipment.

Size	Part number	Holding force Spring energy <sup>1)</sup> (N)	Dimensions (mm)											Displacement <sup>3)</sup> (cm <sup>3</sup> )	Weight (kg)	
			A	B <sub>1</sub>	B <sub>3max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F	G <sub>1</sub>	N <sub>3</sub>			S <sub>2</sub>
35 <sup>4)</sup>	R1619 342 21	7 500 <sup>2)</sup>	100	155	175.4	48	42	41	122	46	9	1/8"	15	M8	5.0	3.80

1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).  
 2) At 150 bar  
 3) Per release cycle  
 4) In preparation

# Notes on Clamping and Braking Units

## General safety notes

**⚠** When working with Clamping Units, always follow all applicable mechanical and electrical accident prevention regulations (e.g. UVV, VDE) and safety procedures!

**⚠** For hydraulic Clamping and Braking Units, the return pressure in the tank line must be lower than 1.5 bar!

**⚠** Consider the response times of the Clamping and Braking Units!

**⚠** The Clamping Unit is not intended for securing suspended loads!

**⚠** Do not remove the cover of the safety clamping unit – spring under tension!

**⚠** The transport safety arbor may only be removed when:

- The hydraulic port has been pressurized with the operating pressure according to instructions.
- The air port has been pressurized with compressed air to at least 4.5 (MBPS) or 5.5 bar (TKPS, UBPS, MKS, LCPS) according to instructions.

The Clamping Unit may only be depressurized when the appropriate guide rail or transport safety arbor is in position between the contact profiles!

**⚠** The use of Clamping and Braking Units is not permitted on guide rails with Integrated Measuring Systems!

## Additional notes for Clamping and Braking Units

**⚠** Use as a safety device only after testing and certification by authorized experts examining the machine as a whole!

## Additional notes for Clamping Units

**⚠** The unit may not be used as a braking unit! For use only when the axis is at a standstill.

**⚠** Pressure may only be applied when the unit is properly mounted on the guide rail!

Accessories, Clamping and Braking Units

## Product Description, Accessories, Hydraulic Clamping Units

### Application areas

- Clamping of heavy handling systems
- Clamping of machine tables in heavy duty machining centers

### Characteristic features

- Very high axial holding forces
- Compact design, compatible with DIN 645
- Dynamic and static stabilization in the axis travel direction


### Further highlights

- Threaded ports on both sides for connection of hydraulic circuit
- Solid, rigid steel housing, catalytically nickel-plated
- High positioning accuracy
- Steplessly adjustable pressure from 50 to 150 bar
- Integrated all-round sealing
- Special pressure diaphragm for high functional reliability without pressure losses or leakage
- Integrated contour-locking, large-surface contact profiles for maximum axial stiffness



Follow the safety notes for Clamping and Braking Units.  187


## Model overview, Accessories, Hydraulic Clamping Units

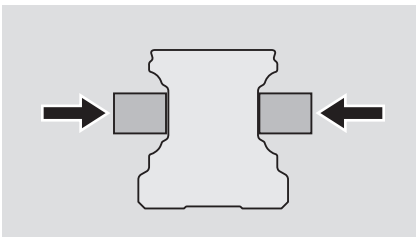KWH, FLS  191KWH, SLS  192KWH, SLH  193

**Hydraulic pressure: 50 - 150 bar**

**Clamping by pressure application**

The large-surface clamping profiles are pressed directly against the free surfaces of the ball guide rail by the piston-type action of a hydraulic oil circuit.

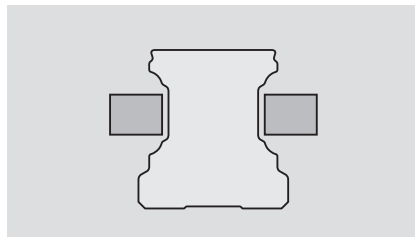

**Hydraulic pressure: 0 bar**

**Release by spring action**

A preloaded return spring provides quick release.

Accessories, Clamping and Braking Units


# Technical Data and Calculations

## Normal forces and holding forces

Measured values for hydraulic Clamping Unit KWH, FLS – flanged, long, standard height, size 25 - 65

**Max. hydraulic operating pressure:**

- Size 25 - 30: 100 bar
- Size 35 - 65: 150 bar

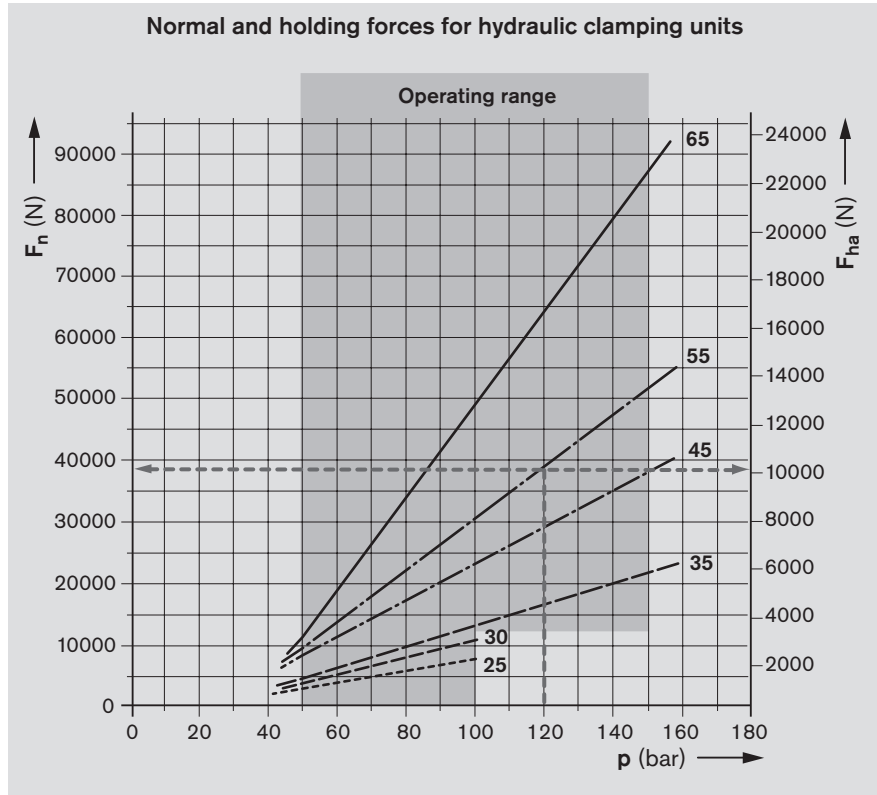

## Calculation of holding force

### Holding force for hydraulic clamping units

$$F_{ha} = F_n \cdot 2 \cdot \mu_0$$

Normal force (measured):  $F_n$  see graph  
 Stiction coefficient:  $\mu_0 = 0.13$  (approx.) for steel/steel, oiled, referred to guide rail

**Calculation example: Clamping Unit KWH size 55**

Pressure:  $p = 120$  bar  
 Normal force:  $F_n = 38,500$  N (as per graph)  
 Holding force:  $F_{ha} = 38,500 \text{ N} \cdot 2 \cdot 0.13 = 10,010$  N

### Permissible holding force for hydraulic clamping units

$$F_{ha, perm} = F_{ha} / f_s$$

The safety factor  $f_s$  depends on:

- vibrations
- force surges
- application-specific requirements, etc.

**Example: Clamping Unit KWH size 55**

Holding force:  $F_{ha} = 10,010$  N (see calculation example)  
 Safety factor:  $f_s = 1.25$  (assumed)  
 Permissible holding force:  $F_{ha, perm} = 10,010 \text{ N} / 1.25 \approx 8,000$  N

- $f_s$  = safety factor (-)
- $F_{ha}$  = holding force (N)
- (at  $\mu_0 = 0.13$ )
- $F_{ha, perm}$  = permissible holding force (N)
- $F_n$  = normal force (N)
- $\mu_0$  = stiction coefficient (-)
- $p$  = pressure (bar)

# Hydraulic Clamping Units KWH

## FLS


### Flanged, long, standard height R1619 .42 11

#### Note

Can be used on all Ball Guide Rails SNS.


#### Lubrication notes


- First filling with hydraulic oil HLP46.
- If other oils are used, check the compatibility.

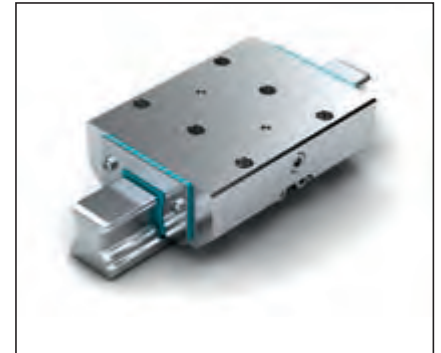

#### Clamping by pressure application

- Max. hydraulic operating pressure:
  - Size 25 - 30: 100 bar
  - Size 35 - 65: 150 bar
- Operating temperature range t:
  - 0 - 70 °C

**⚠ Follow the safety notes for Clamping and Braking Units.**  187

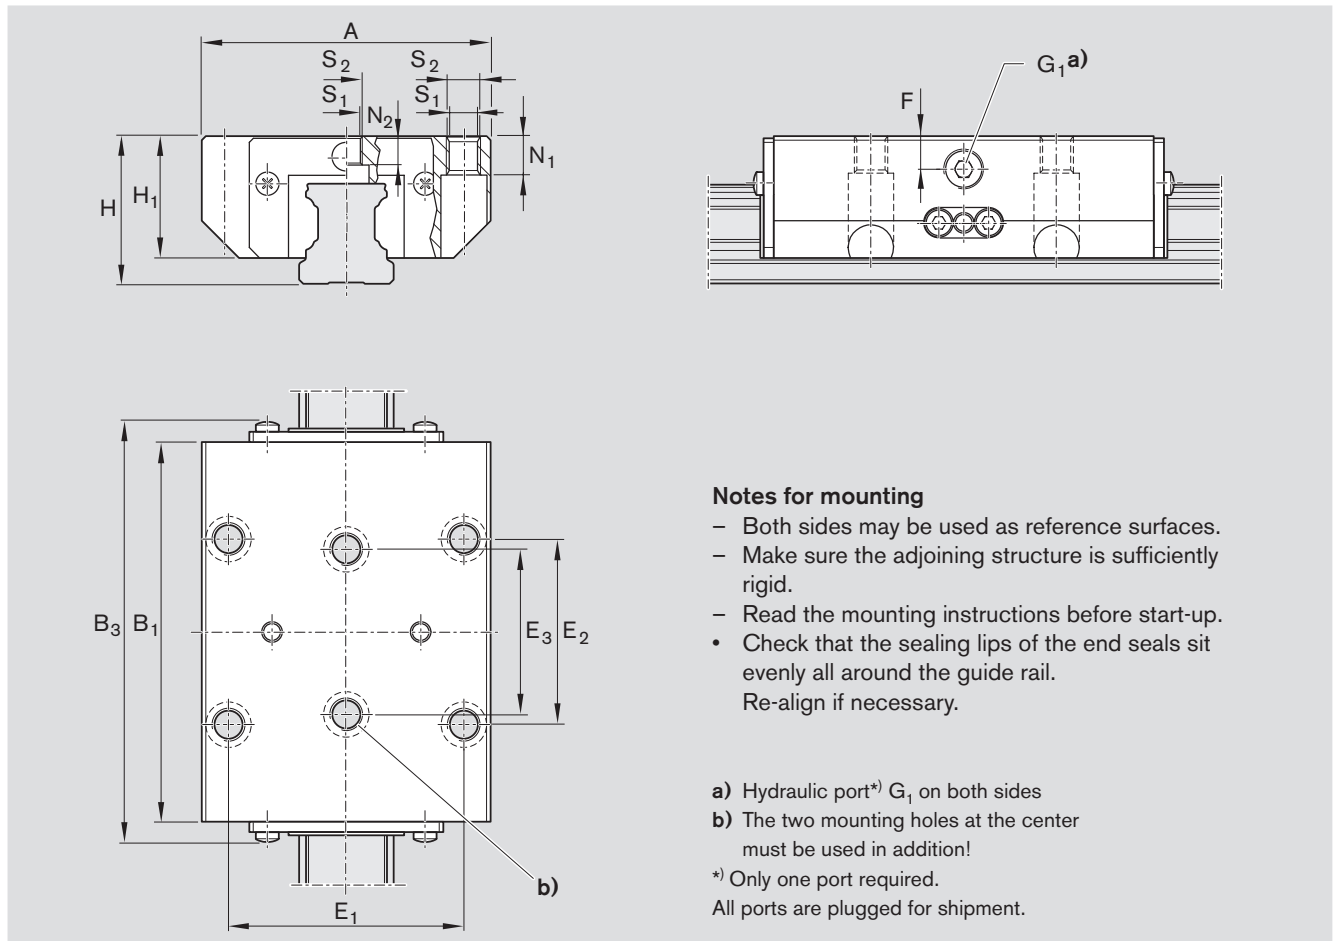

#### Notes for mounting

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.


a) Hydraulic port\*) G<sub>1</sub> on both sides

b) The two mounting holes at the center must be used in addition!

\*) Only one port required.

All ports are plugged for shipment.

Size	Part number	Holding force <sup>1)</sup> (N)	Dimensions (mm)														Displacement <sup>6)</sup> (cm <sup>3</sup> )	Weight (kg)
			A	B <sub>1</sub>	B <sub>3 max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F	G <sub>1</sub>	N <sub>1</sub> <sup>4)</sup>	N <sub>2</sub> <sup>5)</sup>	S <sub>1</sub>	S <sub>2</sub>		
25	R1619 242 11	2 200 <sup>2)</sup>	70	92.0	102.3	36	29.5	57	45	40	8.0	1/8"	9	7.0	6.8	M8	0.6	1.22
30	R1619 742 11	3 000 <sup>2)</sup>	90	103.5	115.4	42	35.0	72	52	44	10.5	1/8"	11	8.0	8.6	M10	0.7	2.09
35	R1619 342 11	5 700 <sup>3)</sup>	100	120.5	133.0	48	40.0	82	62	52	12.0	1/8"	12	10.2	8.6	M10	1.1	2.69
45	R1619 442 11	9 900 <sup>3)</sup>	120	155.0	170.0	60	50.0	100	80	60	15.0	1/8"	15	12.4	10.5	M12	1.8	5.32
55	R1619 542 11	13 700 <sup>3)</sup>	140	184.0	201.0	70	57.0	116	95	70	16.0	1/8"	18	13.5	12.5	M14	2.4	8.40
65	R1619 642 11	22 700 <sup>3)</sup>	170	227.0	256.0	90	76.0	142	110	82	20.0	1/4"	23	14.0	14.5	M16	3.8	17.30

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68). Permissible holding force  190

2) At 100 bar

3) At 150 bar

4) For mounting from below with ISO 4762

5) For mounting from below with DIN 7984

6) Per clamping cycle

Accessories, Clamping and Braking Units

# Hydraulic Clamping Units KWH


**SLS**  
**Slimline, long, standard height**  
**R1619 .42 51**

**Note**  
 Can be used on all Ball Guide Rails SNS.

**Lubrication notes**


- First filling with hydraulic oil HLP46.
- If other oils are used, check the compatibility.

**⚠ Follow the safety notes for Clamping and Braking Units.** ☞ 187

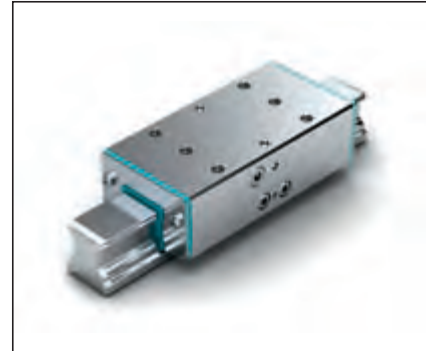

**Clamping by pressure application**

- Max. hydraulic operating pressure:
  - Size 25 - 30: 100 bar
  - Size 35, 55, 65: 150 bar
  - Size 45: 110 bar
- Operating temperature range t: 0 - 70 °C

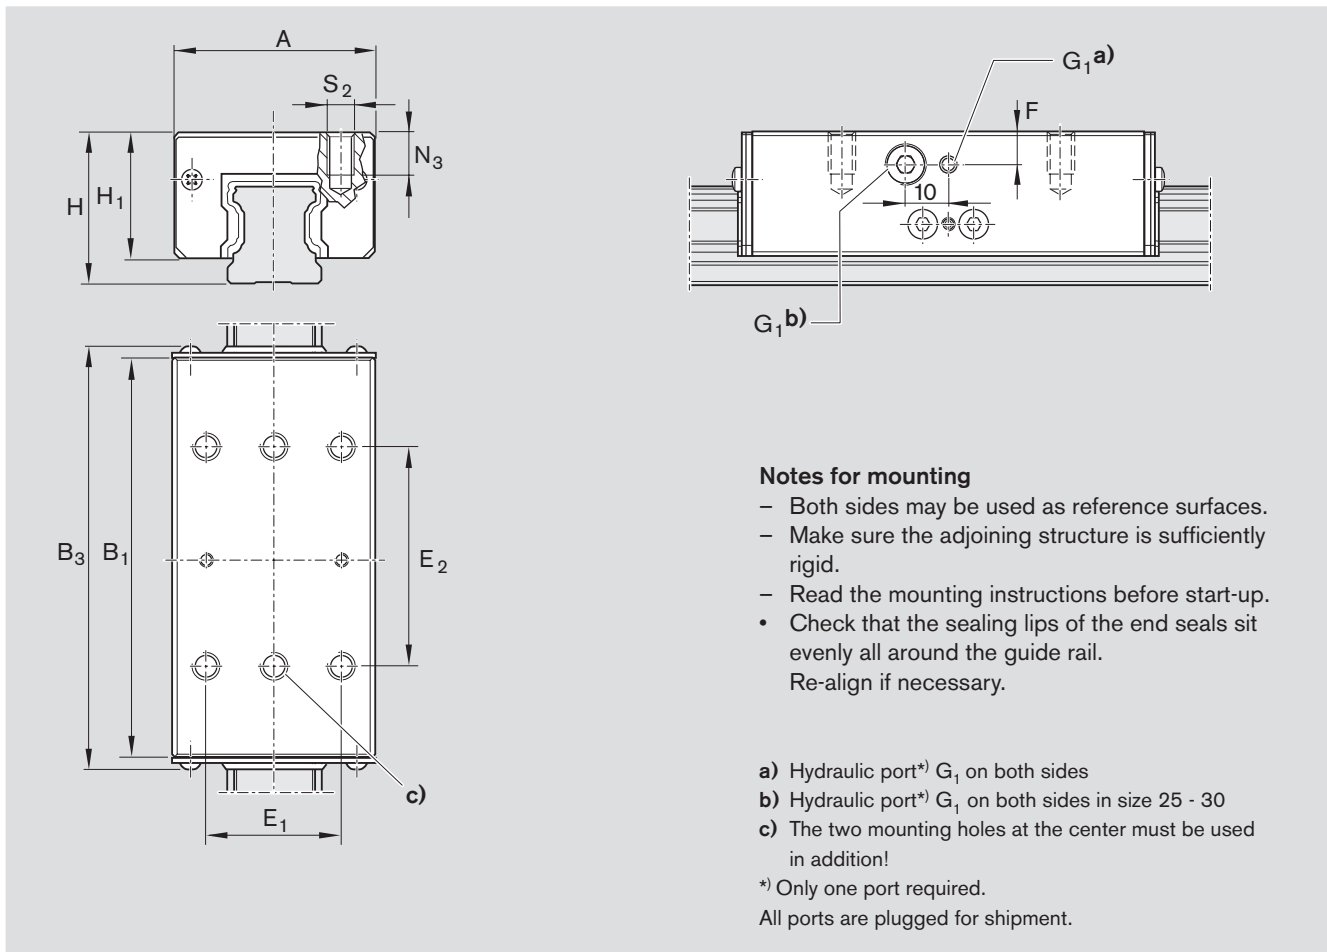

**Notes for mounting**

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

- a) Hydraulic port\*) G<sub>1</sub> on both sides
  - b) Hydraulic port\*) G<sub>1</sub> on both sides in size 25 - 30
  - c) The two mounting holes at the center must be used in addition!
- \*) Only one port required.  
 All ports are plugged for shipment.

Size	Part number	Holding force <sup>1)</sup> (N)	Dimensions (mm)											Displacement <sup>4)</sup> (cm <sup>3</sup> )	Weight (kg)
			A	B <sub>1</sub>	B <sub>3 max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	F	G <sub>1</sub>	N <sub>3</sub>	S <sub>2</sub>		
25	R1619 242 51	1 600 <sup>2)</sup>	48	92.0	102.3	36	29.5	35	50	8	1/8"	8	M6	0.6	1.22
30	R1619 742 51	3 000 <sup>2)</sup>	60	103.5	115.4	42	35.0	40	60	9	1/8"	8	M8	0.7	2.09
35	R1619 342 51	3 500 <sup>2)</sup>	70	120.5	134.0	48	40.0	50	72	12	1/8"	13	M8	1.1	2.02
45	R1619 442 51	7 400 <sup>2)</sup>	86	155.0	170.0	60	50.0	60	80	15	1/8"	15	M10	1.8	4.00
55	R1619 542-51	13 700 <sup>3)</sup>	100	184.0	201.0	70	57.0	75	95	16	1/8"	18	M12	2.4	6.10
65	R1619 642 51	22 700 <sup>3)</sup>	126	227.0	256.0	90	76.0	76	120	20	1/4"	21	M16	3.8	14.40

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68). Permissible holding force ☞ 190

2) At 100 bar  
 3) At 150 bar  
 4) Per clamping cycle

## SLH Slimline, long, high R1619 .42 31

### Note


Can be used on all Ball Guide Rails SNS.



### Clamping by pressure application

- Max. hydraulic operating pressure:
  - Size 25 - 30: 100 bar
  - Size 35, 55, 65: 150 bar
  - Size 45: 110 bar
- Operating temperature range t: 0 - 70 °C

### Lubrication notes

- First filling with hydraulic oil HLP46.
- If other oils are used, check the compatibility.

**⚠ Follow the safety notes for Clamping and Braking Units.**  187

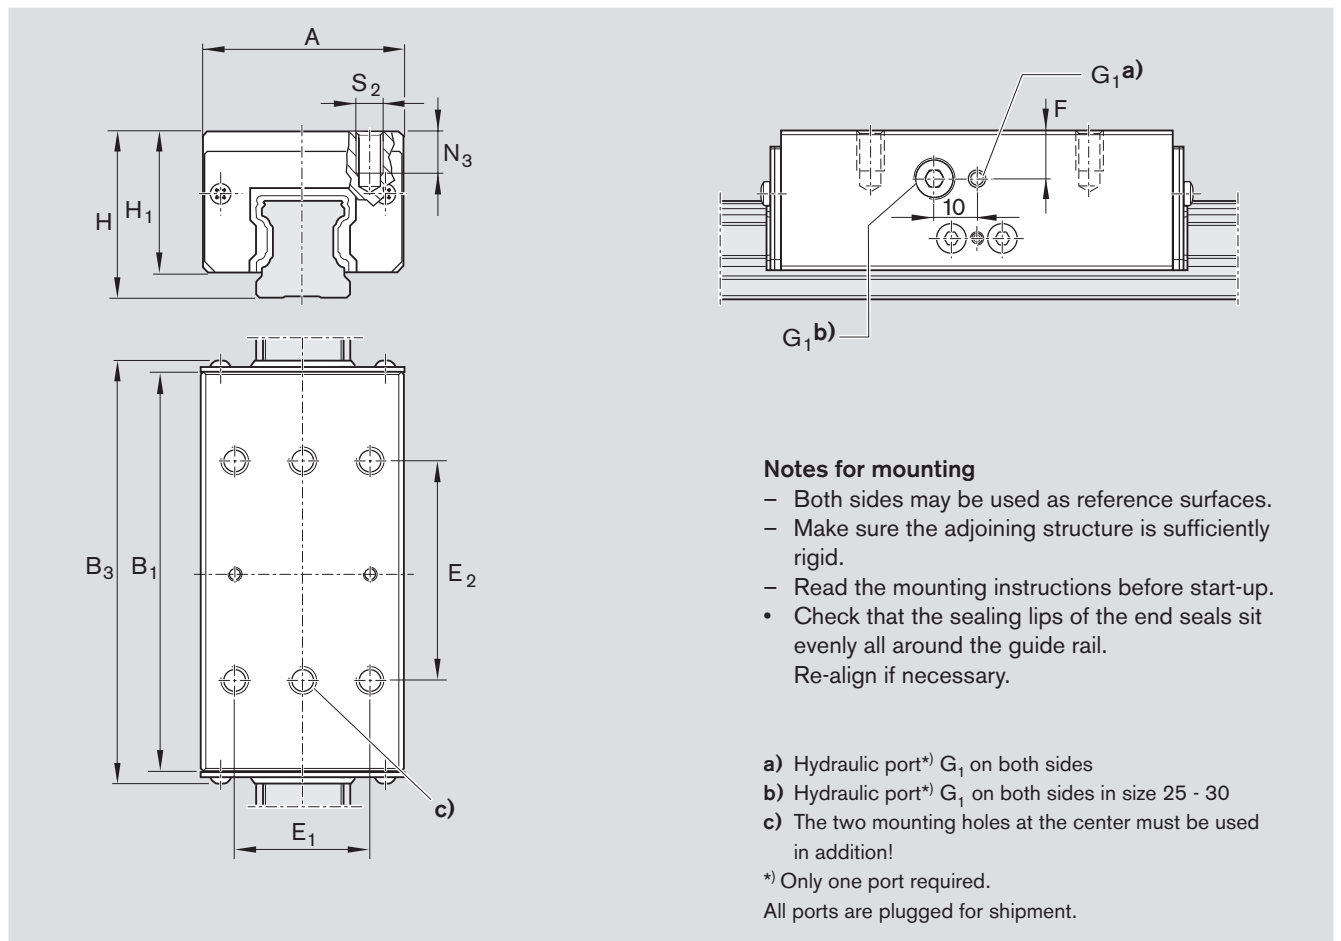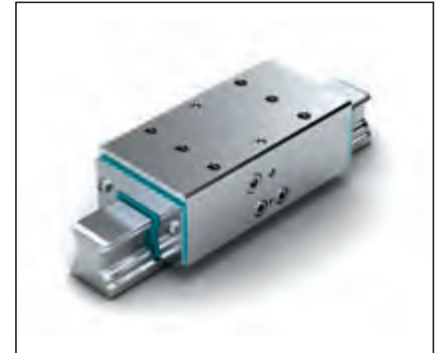

### Notes for mounting

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

a) Hydraulic port\*) G<sub>1</sub> on both sides


b) Hydraulic port\*) G<sub>1</sub> on both sides in size 25 - 30

c) The two mounting holes at the center must be used in addition!

\*) Only one port required.

All ports are plugged for shipment.

Size	Part number	Holding force <sup>1)</sup> (N)	Dimensions (mm)											Displacement <sup>4)</sup> (cm <sup>3</sup> )	Weight (kg)
			A	B <sub>1</sub>	B <sub>3 max</sub>	H	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	F	G <sub>1</sub>	N <sub>3</sub>	S <sub>2</sub>		
25	R1619 242 31	1 600 <sup>2)</sup>	48	92.0	102.3	40	33.5	35	50	12	1/8"	12	M6	0.6	1.10
30	R1619 742 31	3 000 <sup>2)</sup>	60	103.5	115.4	45	38.0	40	60	12	1/8"	11	M8	0.7	1.90
35	R1619 342 31	3 500 <sup>2)</sup>	70	120.5	134.0	55	47.0	50	72	18	1/8"	13	M8	1.1	2.46
45	R1619 442 31	7 400 <sup>2)</sup>	86	155.0	170.0	70	60.0	60	80	24	1/8"	18	M10	1.8	4.95
55	R1619 542 31	13 700 <sup>3)</sup>	100	184.0	201.0	80	67.0	75	95	26	1/8"	19	M12	2.4	7.90

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68). Permissible holding force  190

2) At 100 bar

3) At 150 bar

4) Per clamping cycle



## Product Description, Accessories, Pneumatic Clamping and Braking units

### Application areas

#### Clamping

- In the event of a pressure drop
- During installation work and while machine is stopped, without power
- Clamping of axes in machining centers
- Clamping of Z-axes in rest positions

#### Braking

- In the event of a power failure
- In the event of a pressure drop
- Reinforcing the E-Stop function
- Auxiliary brake for linear motors

### Characteristic features

- Clamping and braking by spring energy accumulator
- Integrated contour-locking contact profiles for maximum axial and horizontal stiffness, providing excellent braking action
- Dynamic and static stabilization in the axis travel direction

### Further highlights

- Up to 1 million clamping cycles
- Up to 2,000 emergency braking operations
- Integrated all-round sealing
- High continuous performance
- High positioning accuracy
- Tapered valve mechanism
- Solid, rigid steel housing, catalytically nickel-plated
- Low air consumption
- Zero maintenance

#### Special features of MBPS:

- Clamping and braking unit in compact, short design
- Add-ons with three pistons connected in series combined with strong springs result in holding forces up to 3,800 N at just 4.5 bar release pressure

#### Special features of TKPS:

- Very high axial holding forces up to 4,800 N at 5.5 bar release pressure due to add-on module and strong spring energy accumulators
- Holding force can be increased to 6,700 N through additional pressurization with compressed air at the air-plus port
- Extremely low air consumption
- Compact design, compatible with DIN 645


#### Special features of UBPS:

- Very high axial holding forces up to 2,800 N at 5.5 bar release pressure due to strong spring energy accumulators
- Holding force can be increased to 3,800 N through additional pressurization with compressed air at the air-plus port
- Extremely low air consumption
- Compact design, compatible with DIN 645
- Successor model to the TKPS series
- To be used for new-build designs

 Follow the safety notes for Clamping and Braking Units.  187

### Model overview, Accessories, Pneumatic Clamping and Braking Units

MBPS  196

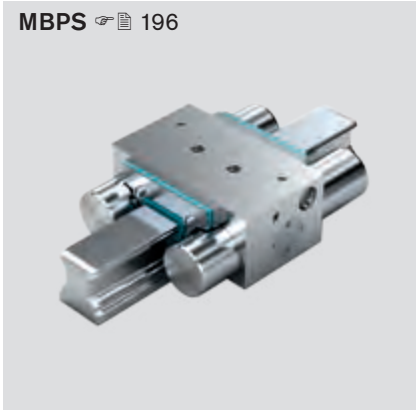


TKPS without adapter plate  198



TKPS with adapter plate  200



UBPS  202

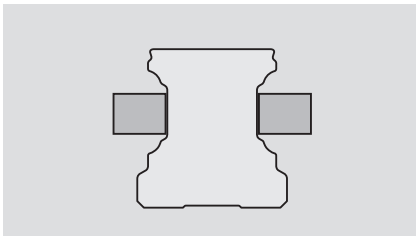


**Air pressure: 0 bar**

#### Clamping and braking by spring action

In the event of a pressure drop, braking or clamping is achieved by a dual-action tapered slide valve mechanism with two spring assemblies (spring energy accumulators).

An integrated quick venting valve in the MBPS, TKPS, and UBPS models ensures fast response.

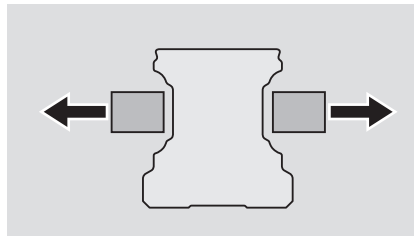

**Air pressure: 4.5 - 8 bar (MBPS)  
5.5 - 8 bar (TKPS)  
5.5 - 8 bar (UBPS)**

#### Release by air pressure

The clamping profiles are held apart by compressed air.

- Allows free movement

Accessories, Clamping and Braking Units

# Pneumatic Clamping and Braking Units MBPS

## R1619 .40 31

### Note


Can be used on all Ball Guide Rails SNS.



### Pressureless clamping and braking (spring energy)

- Release pressure min. 4.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C

### Notes for mounting


- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

**⚠ Follow the safety notes for Clamping and Braking Units.**  187

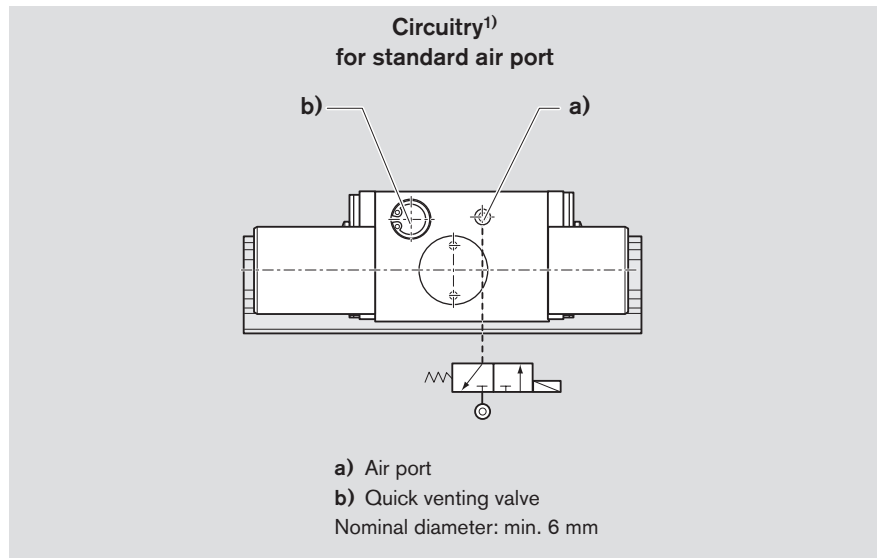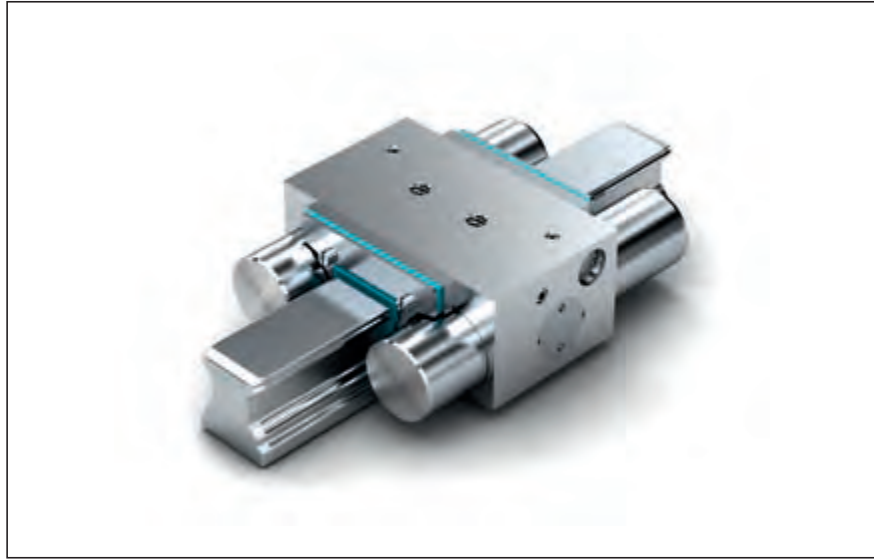

Size	Part number	Holding force Spring energy <sup>1)</sup> (N)	Air consumption (normalized)
			Air port (dm <sup>3</sup> /stroke)
20	R1619 840 31	750	0.034
25	R1619 240 31	1 300	0.048
30	R1619 740 31	2 000	0.065
35	R1619 340 31	2 600	0.093
45	R1619 440 31	3 800	0.099
55	R1619 540 31	4 700	0.244
65	R1619 640 31	4 700	0.244

1) Holding force achieved by spring energy at 6 bar. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

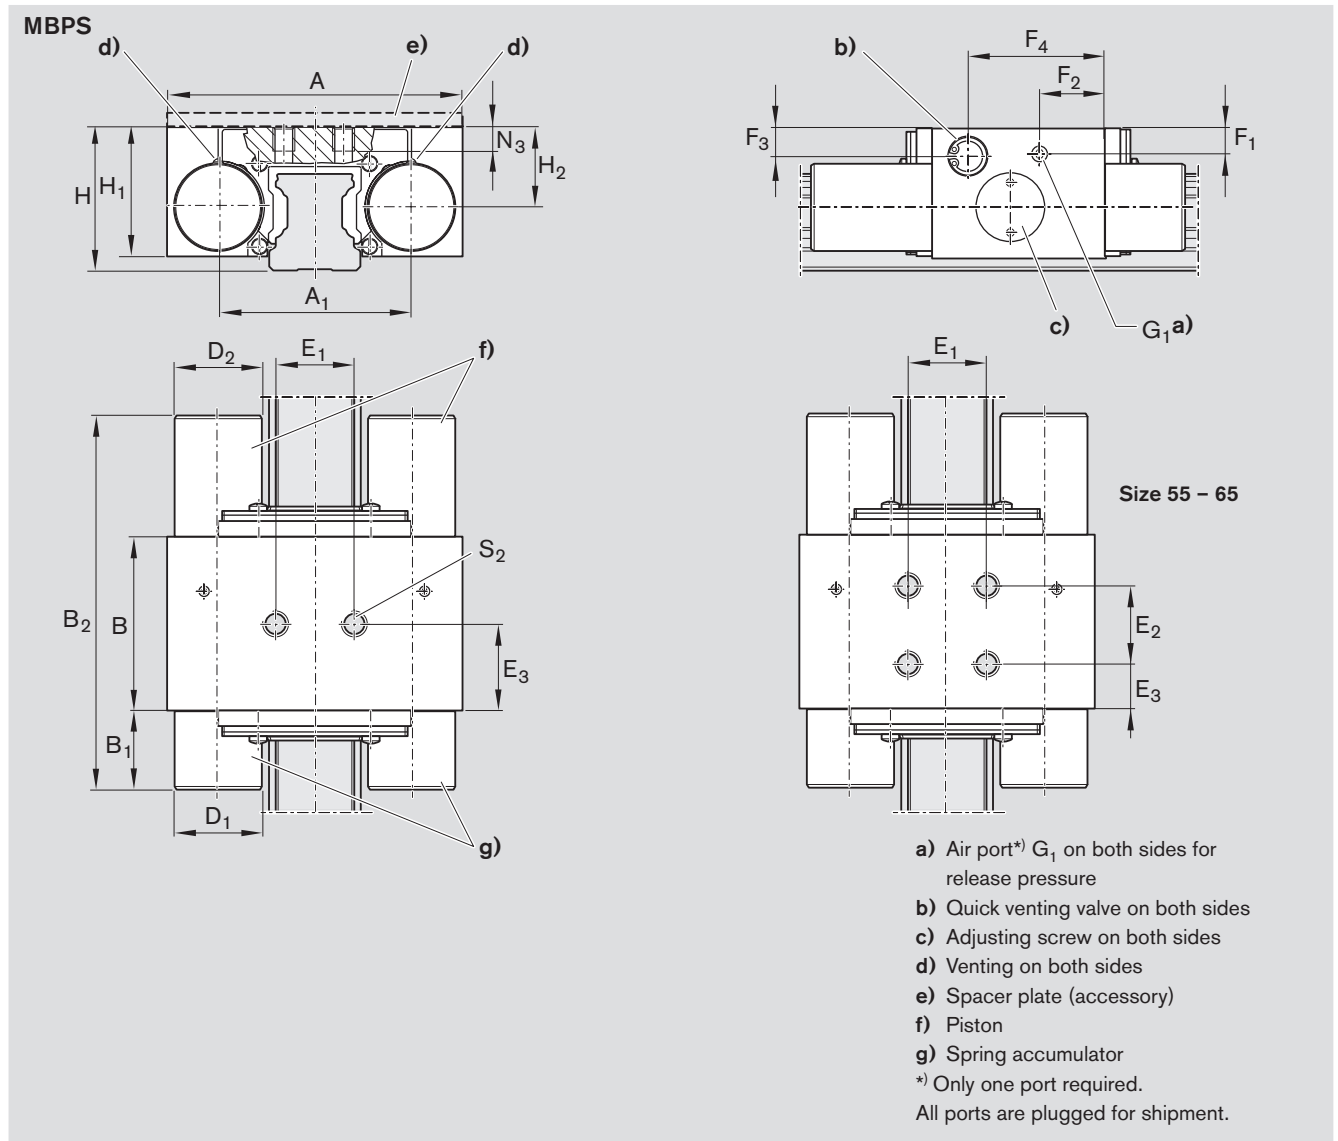

Size	Dimensions (mm)																				Weight (kg)
	A	A <sub>1</sub>	B	B <sub>1</sub>	B <sub>2,max</sub>	D <sub>1</sub>	D <sub>2</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	G <sub>1</sub>	H	H <sub>1</sub> <sup>1)</sup>	H <sub>2</sub>	N <sub>3</sub>	S <sub>2</sub>	
20	66	45.7	44	19.0	94.5	16	18	20	-	22.0	5.5	15.5	6.0	35.5	M5	30	25.8	16.2	8.6	M6	0.7
25	75	49.0	44	20.2	95.5	22	22	20	-	22.0	6.5	16.5	7.0	34.7	M5	36	32.5	20.0	8.0	M6	1.0
30	90	58.0	47	29.0	107.5	25	25	22	-	23.0	7.2	30.5	7.2	40.0	M5	42	38.5	24.0	9.0	M8	1.8
35	100	68.0	46	27.7	106.2	28	28	24	-	24.5	9.0	19.0	9.5	38.0	G1/8"	48	42.0	26.5	10.0	M8	1.9
45	120	78.8	49	32.2	113.7	30	30	26	-	24.5	15.0	31.1	12.2	41.6	G1/8"	60	52.0	35.5	15.0	M10	2.3
55	140	97.0	62	41.0	145.0	39	39	38	38	12.0	11.0	23.0	11.0	40.0	M5	70	59.0	38.0	18.0	M10	3.7
65	150	106.0	62	41.0	145.0	39	38	38	38	12.0	16.0	23.0	16.0	40.0	M5	90	75.5	53.5	18.0	M10	4.2

1) For Ball Runner Block .H. (... , high, ...), a spacer plate is needed. Available on request.

Accessories, Clamping and Braking Units

# Pneumatic Clamping and Braking Units TKPS

## R1619 .40 11

With add-on module without adapter plate for mounting from above

Very high axial holding forces due to add-on module and strong spring energy accumulators; increased holding force thanks to additional pressure through the air-plus port

**Note**


Can be used on all Ball Guide Rails SNS.




**Pressureless clamping and braking (spring energy)**

- Release pressure min. 5.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C

**Notes for mounting**

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

**⚠ Follow the safety notes for Clamping and Braking Units.**  187

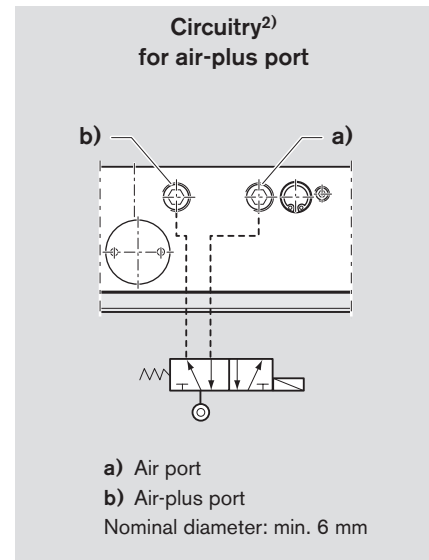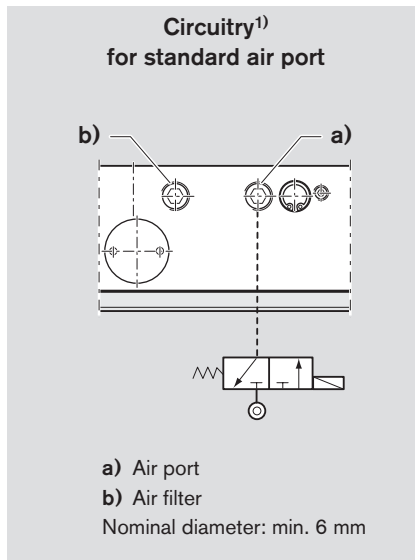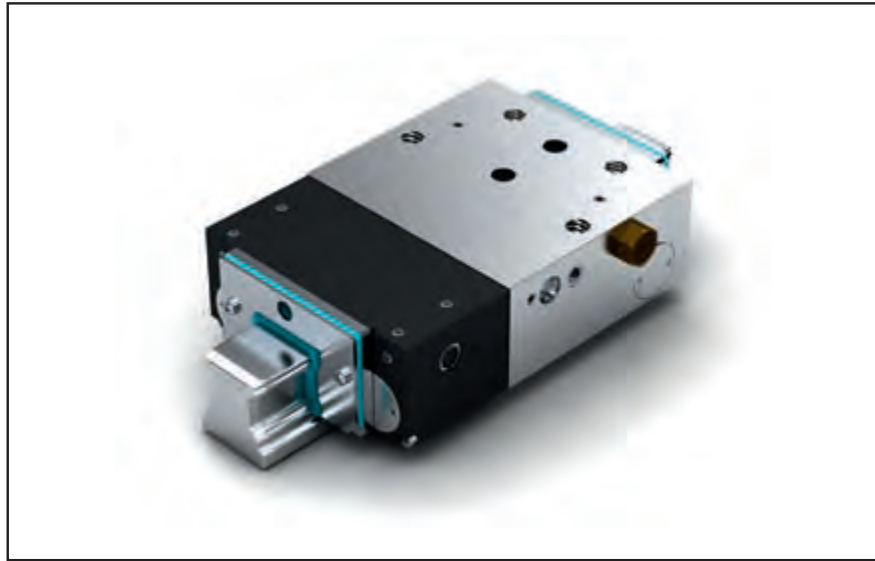


Size	Part number	Holding force		Air consumption (normalized)	
		Spring energy <sup>1)</sup> (N)	with air-plus port <sup>2)</sup> (N)	Air port (dm <sup>3</sup> /stroke)	Air-plus port (dm <sup>3</sup> /stroke)
35	R1619 340 11	2 200	3 200	0.150	0.335
45	R1619 440 11	3 800	5 000	0.243	0.542
55	R1619 540 11	4 800	6 700	0.318	1.062

1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Increased holding force through additional pressurization with 5.5 bar compressed air at the air-plus port. Switching via 5/2 or 5/3-way directional control valve.

TKPS with add-on module without adapter plate

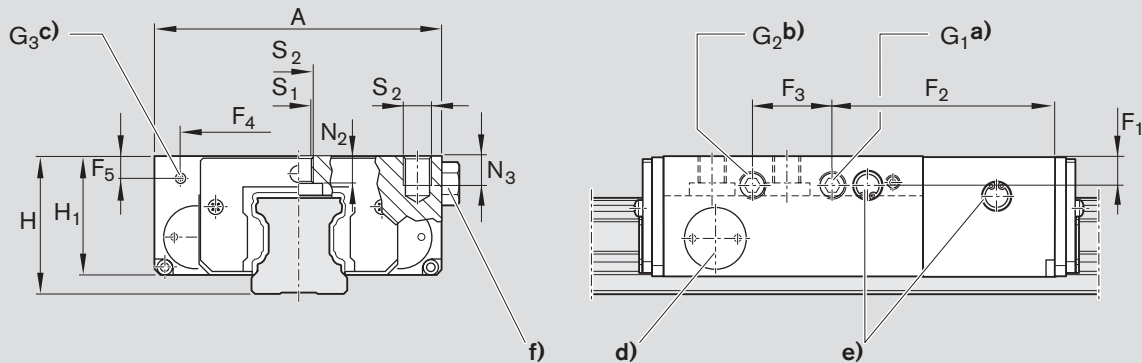

- a) Air port\*\*) G<sub>1</sub> on both sides for release pressure
  - b) Connection\*\*) G<sub>2</sub> on both sides for air-plus port or air filter
  - c) Air port\*\*) G<sub>3</sub> for release pressure (not air-plus port).  
Only on add-on module.
  - d) Adjusting screw on both sides
  - e) Venting on both sides
  - f) Air filter: connection G<sub>2</sub> (at either side)
  - g) The two mounting holes at the center must be used in addition!
- \*) SW = width across flats  
 \*\*) Only one port required.  
 All ports are plugged for shipment.

Size	Dimensions (mm)													
	A	B <sub>1</sub>	B <sub>3 max</sub>	B <sub>5</sub>	E <sub>1</sub>	E <sub>3</sub>	E <sub>4</sub>	E <sub>7</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	F <sub>5</sub>	
35	100	136	156.4	46	82	5.0	31.0	88.0	10.0	77	28	82	8.0	
45	120	152	174.0	48	100	10.0	40.0	88.0	9.0	100	18	96	9.0	
55	140	183	208.0	48	116	12.5	47.5	100.5	8.5	65	70	110	8.5	

Size	Dimensions (mm)										Weight (kg)
	G <sub>1</sub>	G <sub>2</sub>	G <sub>3</sub>	H	H <sub>1</sub> <sup>1)</sup>	N <sub>2</sub> <sup>2)</sup>	N <sub>3</sub>	S <sub>1</sub>	S <sub>2</sub>		
35	G1/8"	G1/8"	M5	48	42	9.5	10.0	8.6	M10	2.60	
45	G1/8"	G1/8"	M5	60	52	12.4	15.0	10.5	M12	4.65	
55	G1/8"	G1/8"	G1/8"	70	59	12.5	12.5	12.2	M14	6.60	

1) Consider the height!  
 2) For mounting from below with DIN 7984

Accessories, Clamping and Braking Units

# Pneumatic Clamping and Braking Units TKPS

## R1619 .40 10

With add-on module and adapter plate for mounting from above or below

Very high axial holding forces due to add-on module and strong spring energy accumulators; increased holding force thanks to additional pressure through the air-plus port

**Note**



Can be used on all Ball Guide Rails SNS.

**Pressureless clamping and braking (spring energy)**

- Release pressure min. 5.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C

**Notes for mounting**

- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

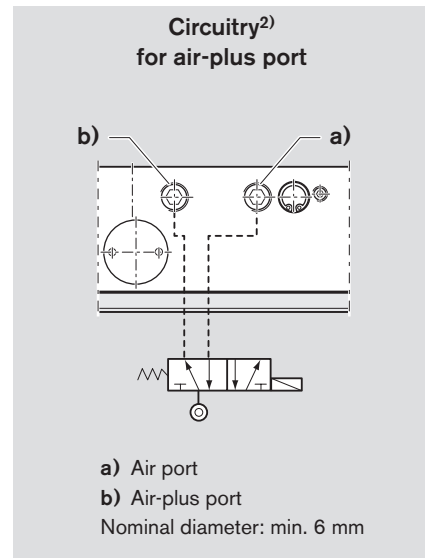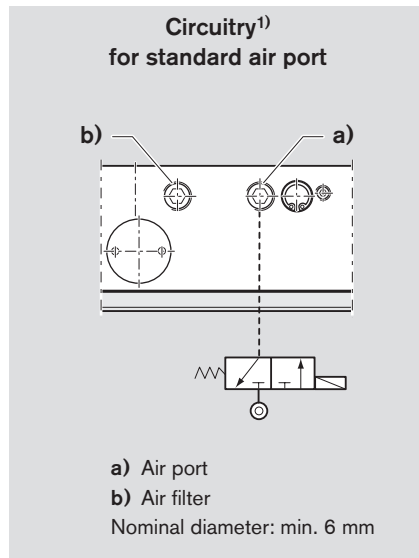


**⚠ Follow the safety notes for Clamping and Braking Units.** 187

Size	Part number	Holding force		Air consumption (normalized)	
		Spring energy <sup>1)</sup> (N)	with air-plus port <sup>2)</sup> (N)	Air port (dm <sup>3</sup> /stroke)	Air-plus port (dm <sup>3</sup> /stroke)
35	R1619 340 10	2 200	3 200	0.150	0.335
45	R1619 440 10	3 800	5 000	0.243	0.542
55	R1619 540 10	4 800	6 700	0.318	1.062

1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Increased holding force through additional pressurization with 5.5 bar compressed air at the air-plus port. Switching via 5/2 or 5/3-way directional control valve.

TKPS with add-on module and adapter plate

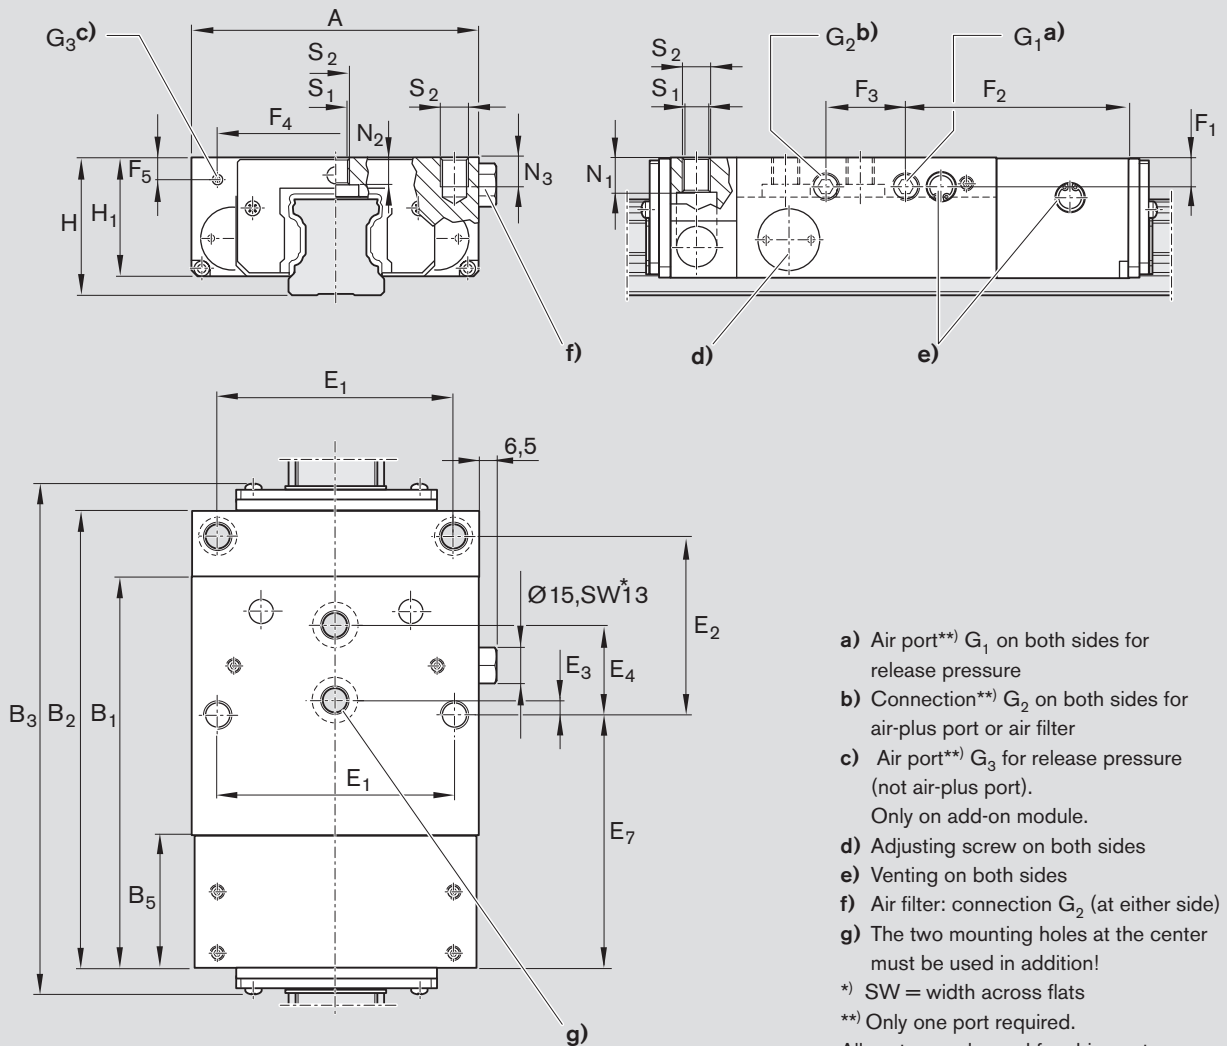

- a) Air port\*\*) G<sub>1</sub> on both sides for release pressure
  - b) Connection\*\*) G<sub>2</sub> on both sides for air-plus port or air filter
  - c) Air port\*\*) G<sub>3</sub> for release pressure (not air-plus port). Only on add-on module.
  - d) Adjusting screw on both sides
  - e) Venting on both sides
  - f) Air filter: connection G<sub>2</sub> (at either side)
  - g) The two mounting holes at the center must be used in addition!
- \*) SW = width across flats  
 \*\*) Only one port required.  
 All ports are plugged for shipment.

Size	Dimensions (mm)														
	A	B <sub>1</sub>	B <sub>2</sub>	B <sub>3 max</sub>	B <sub>5</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>4</sub>	E <sub>7</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	F <sub>5</sub>
35	100	136	159.0	179	46	82	62.0	5.0	31.0	88.0	10.0	77	28	82	8.0
45	120	152	177.5	199	48	100	80.0	10.0	40.0	88.0	9.0	100	18	96	9.0
55	140	183	207.5	232	48	116	95.0	12.5	47.5	100.5	8.5	65	70	110	8.5

Size	Dimensions (mm)										Weight (kg)
	G <sub>1</sub>	G <sub>2</sub>	G <sub>3</sub>	H	H <sub>1</sub> <sup>1)</sup>	N <sub>1</sub> <sup>2)</sup>	N <sub>2</sub> <sup>3)</sup>	N <sub>3</sub>	S <sub>1</sub>	S <sub>2</sub>	
35	G1/8"	G1/8"	M5	48	42	14	9.5	10.0	8.6	M10	2.90
45	G1/8"	G1/8"	M5	60	52	18	12.4	15.0	10.5	M12	5.10
55	G1/8"	G1/8"	G1/8"	70	59	18	12.5	12.5	12.2	M14	7.30

1) Consider the height!  
 2) For mounting from below with ISO 4762  
 3) For mounting from below with DIN 7984



Accessories, Clamping and Braking Units

# Pneumatic Clamping and Braking Units UBPS

## R1619 .40 51

Very high axial holding forces due to three pistons connected in series combined with strong spring energy accumulator; increased holding force thanks to additional pressure through the air-plus port

### Note



Can be used on all Ball Guide Rails SNS.




### Pressureless clamping and braking (spring energy)

- Release pressure min. 5.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C

### Notes for mounting


- Both sides may be used as reference surfaces.
- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.
- Check that the sealing lips of the end seals sit evenly all around the guide rail. Re-align if necessary.

 Follow the safety notes for Clamping and Braking Units.  187

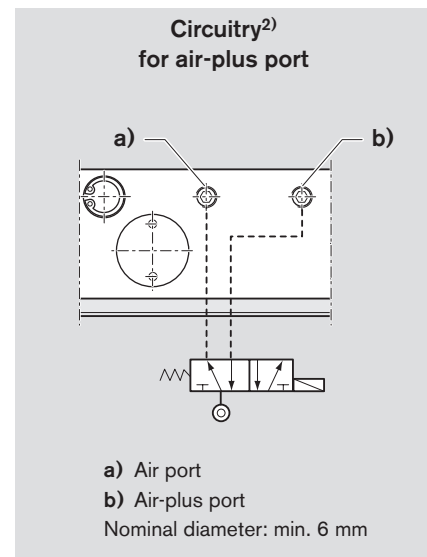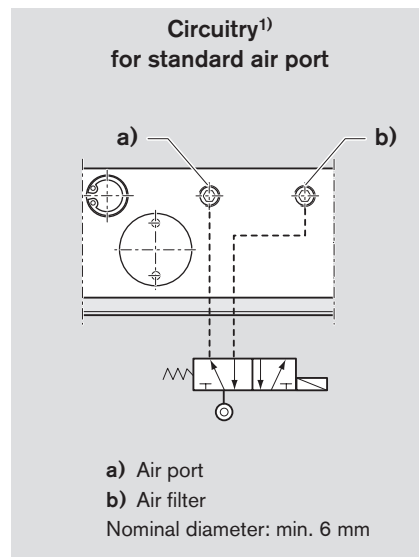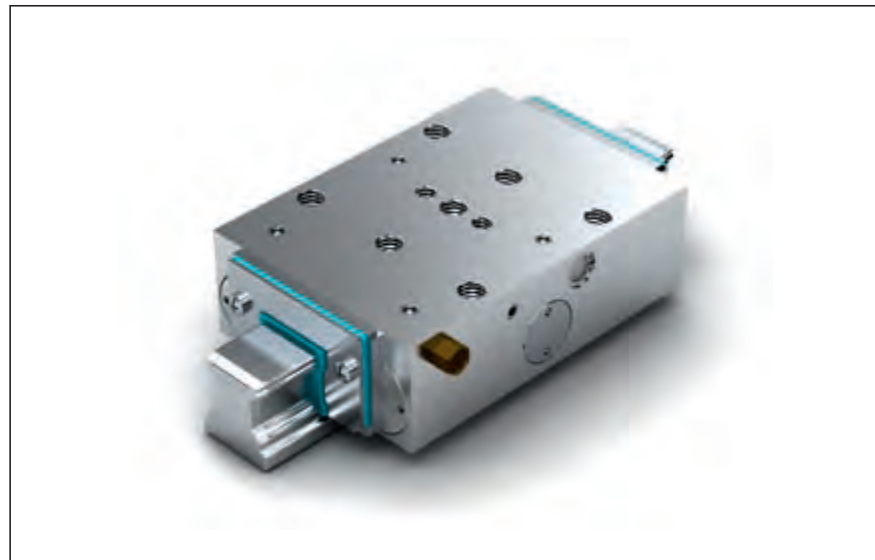

Size	Part number	Holding force		Air consumption (normalized)	
		Spring energy <sup>1)</sup> (N)	with air-plus port <sup>2)</sup> (N)	Air port (dm <sup>3</sup> /stroke)	Air-plus port (dm <sup>3</sup> /stroke)
25	R1619 240 51	1 850	2 650	0.080	0.165
30	R1619 740 51	2 500	3 300	0.111	0.274
35	R1619 340 51	2 800	3 800	0.139	0.303

- 1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).
- 2) Increased holding force through additional pressurization with 6.0 bar compressed air at the air-plus port. Switching via 5/2 or 5/3-way directional control valve.
- 3) Type tested according to the EU Machinery Directive 98/37/EC (in force until Dec. 28, 2009) and 2006/42/EC (effective beginning Dec. 29, 2009).

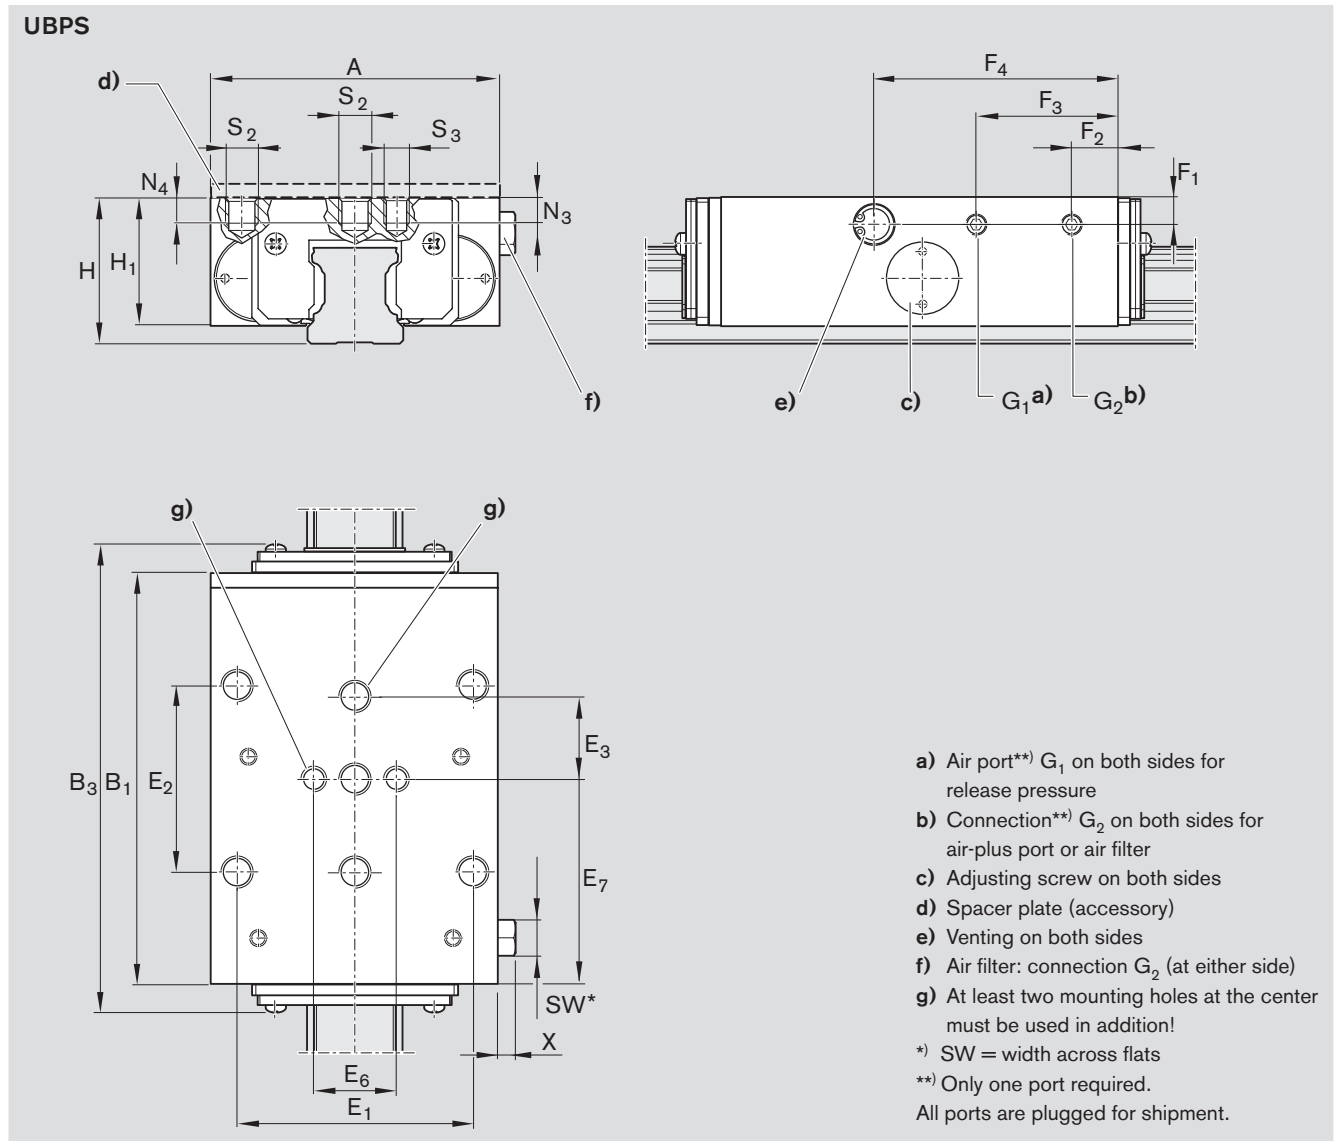

Size	Dimensions (mm)											
	A	B <sub>1</sub>	B <sub>3 max</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>6</sub>	E <sub>7</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>
25	70	99	115.1	57	45	20	20	49.5	6.5	11	34.3	59.0
30	90	109	128.7	72	52	22	22	54.5	6.5	11	40.8	66.5
35	100	109	131.0	82	62	26	24	54.5	8.0	11	40.8	66.5

Size	Dimensions (mm)										Weight (kg)
	G <sub>1</sub>	G <sub>2</sub>	H	H <sub>1</sub> <sup>1)</sup>	N <sub>3</sub>	N <sub>4</sub>	S <sub>2</sub>	S <sub>3</sub>	X	SW <sup>2)</sup>	
25	M5	M5	36	31	7	7	M8	M6	5.5	Ø8. SW7	1.20
30	M5	M5	42	37	8	8	M10	M8	5.5	Ø8. SW7	1.80
35	G1/8"	G1/8"	48	42	10	10	M10	M8	6.5	Ø15. SW13	2.25

1) For Ball Runner Block .H. (... , high, ...), a spacer plate is needed. Available on request.

2) SW = width across flats

## Product Description, Accessories, Pneumatic Clamping Units

### Application areas

- Pneumatic clamping of machine axes
- Table crossbars in the woodworking industry
- Positioning of hoists

### Characteristic features

- High axial holding forces within a very short span
- Dynamic and static stabilization in the axis travel direction
- Simple mechanical gripping principle in LCP and LCPS with good price/performance ratio

### Further highlights

- Easy to mount
- Steel housing, catalytically nickel-plated
- High axial and horizontal stiffness
- Precise positioning

### Special features of MK:

- Clamping by pressure (pneumatic) via a dual-action tapered slide valve mechanism.
- Steplessly adjustable pressure from 4 to 8 bar
- Quick release

### Special features of MKS:



- Pressureless clamping (by spring action) via the dual-action tapered slide valve mechanism with two spring assemblies
- Release pressure 5.5 - 8 bar (pneumatic)
- Increased holding force through air-plus port

### Special features of LCP:



- Clamping by pressure application (pneumatic) through mechanical gripping
- Steplessly adjustable pressure from 5.5 to 8 bar
- Quick release

### Special features of LCPS:

- Pressureless clamping (by spring action) via mechanical gripping with one spring assembly
- Release pressure 5.5 - 8 bar (pneumatic)
- Increased holding force through air-plus port

 Follow the safety notes for Clamping and Braking Units.  187

Model overview, Accessories, Pneumatic Clamping Units

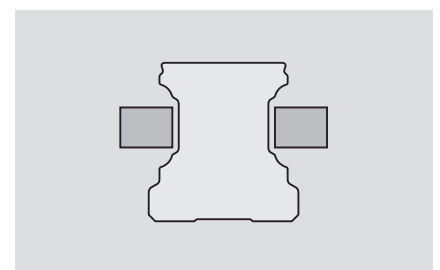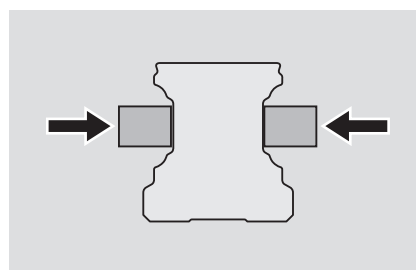

**Air pressure: 4.0 - 8 bar (MK)  
5.5 - 8 bar (LCP)**



**Air pressure: 0 bar (MK/LCP)**

**Clamping by air pressure**

In the MK, the clamping profiles are pressed against the web surfaces of the guide rail by pneumatic pressure acting through a dual-action tapered slide valve mechanism. The LCP achieves its clamping effect through mechanical gripping.

**Release by spring action**

A preloaded return spring provides quick release.

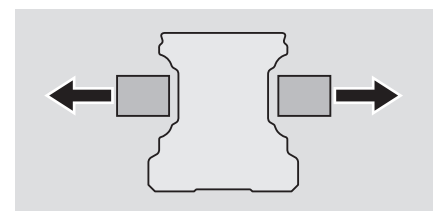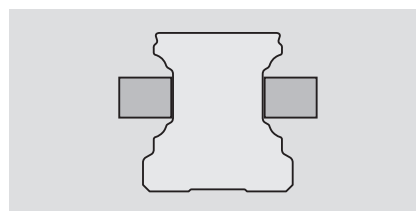

**Air pressure: 0 bar (MKS/LCPS)**

**Air pressure: 5.5 - 8 bar (MKS/ LCPS)**

**Clamping by spring action**

In the event of a pressure drop, the MKS clamps via a dual-action tapered slide valve mechanism with two spring assemblies (spring energy accumulators). An integrated quick venting valve ensures fast response. The LCPS achieves its clamping effect through mechanical gripping with just one spring assembly (spring energy accumulator).

**Release by air pressure**

The clamping profiles are held apart by compressed air.

- Allows free movement

Accessories, Clamping and Braking Units

## Pneumatic Clamping Units MK

### R1619 .42 60

#### Note

Can be used on all Ball Guide Rails SNS.

### R1619 .42 62

#### Note



Can be used on all Ball Guide Rails BNS.


#### Clamping by pressure application

- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C


#### Notes for mounting

- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.

 Follow the safety notes for Clamping and Braking Units.  187

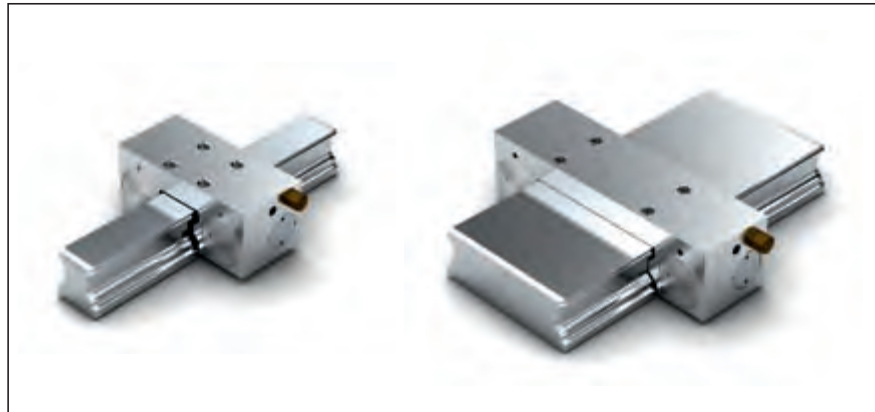

#### Circuitry<sup>1)</sup> for standard air port



a) Air port


b) Air filter

Nominal diameter

- Size 15 - 20: min. 4 mm
- Size 25 - 65: min. 6 mm

Size	Part number	Holding force Pneumatic <sup>1)</sup> (N)	Air consumption (normalized) Air port (dm <sup>3</sup> /stroke)
15	R1619 142 60	650	0.011
20	R1619 842 60	1 000	0.019
25	R1619 242 60	1 200	0.021
30	R1619 742 60	1 750	0.031
35	R1619 342 60	2 000	0.031
45	R1619 442 60	2 250	0.041
55	R1619 542 60	2 250	0.041
65	R1619 642 60	2 250	0.041
20/40	R1619 842 62	650	0.019
25/70	R1619 242 62	1 200	0.021
35/90	R1619 342 62	2 000	0.031

1) Holding force at 6 bar. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

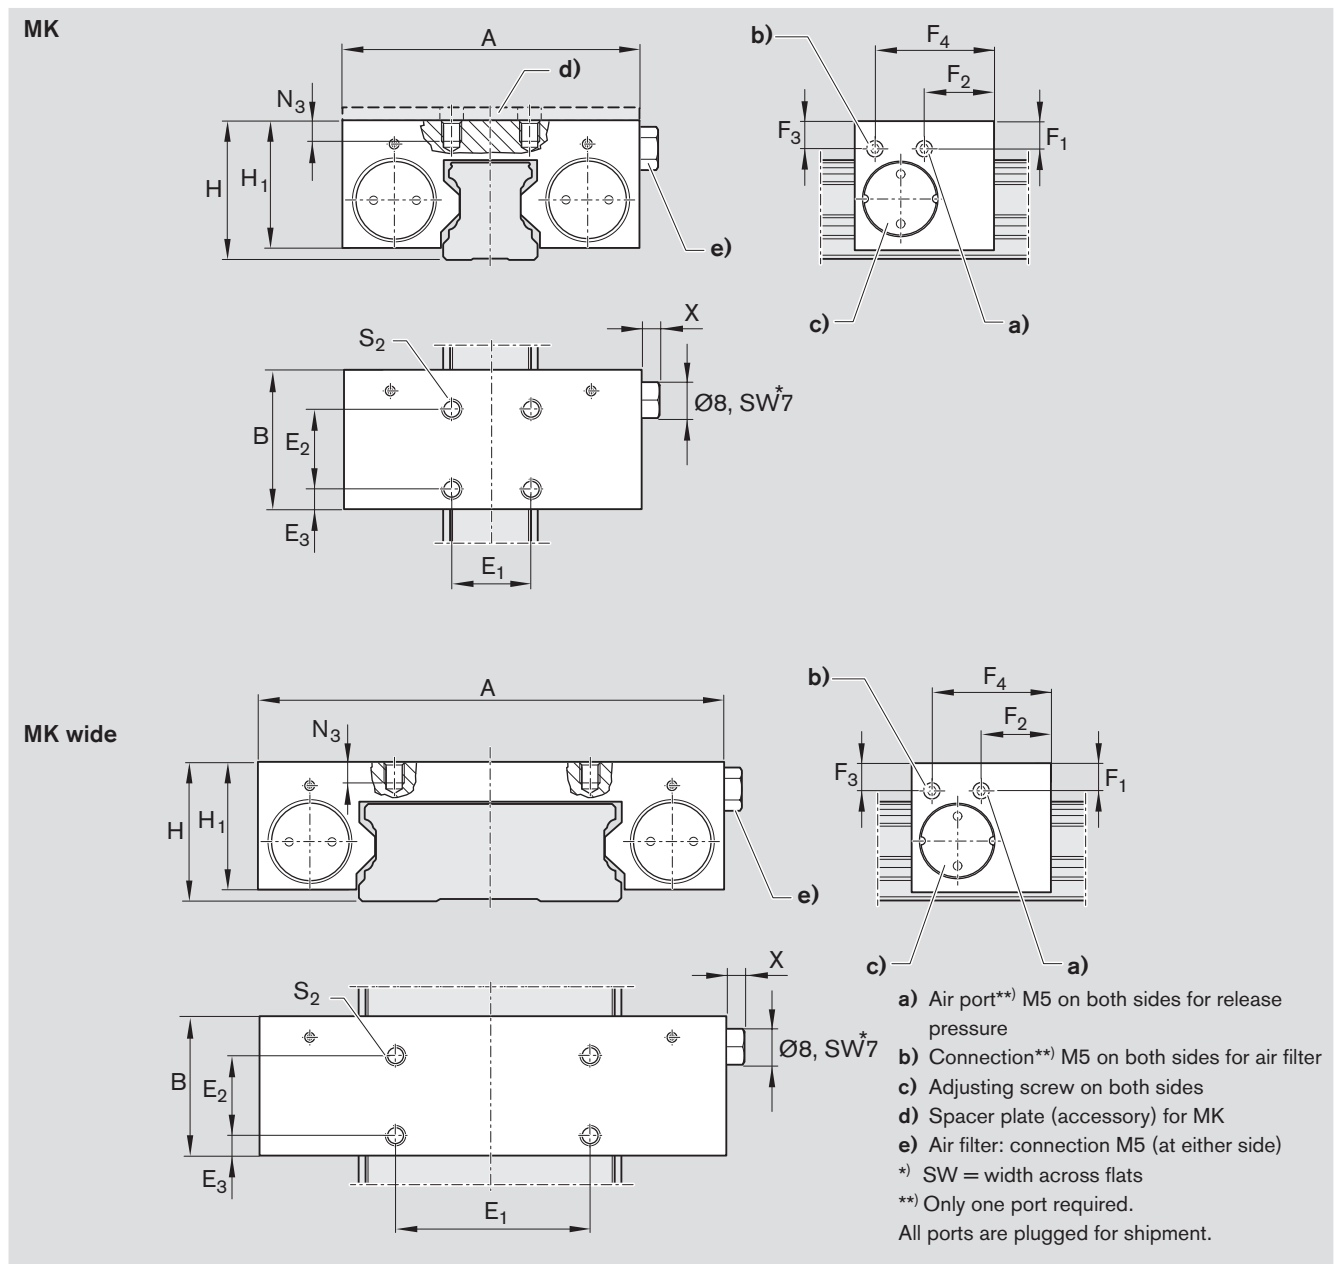

Size	Dimensions (mm)														Weight (kg)
	A	B	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	H	H <sub>1</sub> <sup>1)</sup>	N <sub>3</sub>	S <sub>2</sub>	X	
15	55	39	15	15	15.5	5.6	34.0	16.1	34.0	24	20.8	4.5	M4	6.5	0.25
20	66	39	20	20	9.0	4.5	17.3	6.0	34.5	30	27.0	6.0	M6	5.5	0.36
25	75	35	20	20	5.0	7.0	17.5	7.0	30.0	36	32.5	8.0	M6	5.5	0.45
30	90	39	22	22	8.5	8.5	15.0	10.3	24.5	42	38.5	9.0	M8	5.5	0.72
35	100	39	24	24	7.5	11.0	14.5	12.0	24.5	48	44.0	10.0	M8	5.5	0.88
45	120	49	26	26	11.5	14.5	19.5	14.5	29.5	60	52.0	15.0	M10	5.5	1.70
55	128	49	30	30	9.5	17.0	19.5	17.0	29.5	70	57.0	15.0	M10	5.5	1.95
65	138	49	30	30	9.5	14.5	19.5	14.5	29.5	90	73.5	20.0	M10	5.5	2.68
20/40	80	39	20	20	15.5	5.0	4.5	5.0	31.0	27	23.5	4.5	M4	5.5	0.37
25/70	120	35	50	20	5.0	7.0	17.5	9.0	30.0	35	32.5	8.0	M6	5.5	0.62
35/90	156	42	60	20	9.5	11.5	18.0	14.0	36.5	50	45.5	10.0	M10	5.5	0.88

1) For Ball Runner Block .H. (... , high, ...), a spacer plate is needed ☞ 217

Accessories, Clamping and Braking Units

## Pneumatic Clamping Units MKS

### R1619 .40 60

#### Note

Can be used on all Ball Guide Rails SNS.

### R1619 .40 62

#### Note


Can be used on all Ball Guide Rails BNS.




#### Clamps without pressurization (spring energy)

- Release pressure min. 5.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 70 °C

#### Notes for mounting

- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.


**⚠ Follow the safety notes for Clamping and Braking Units.**  187

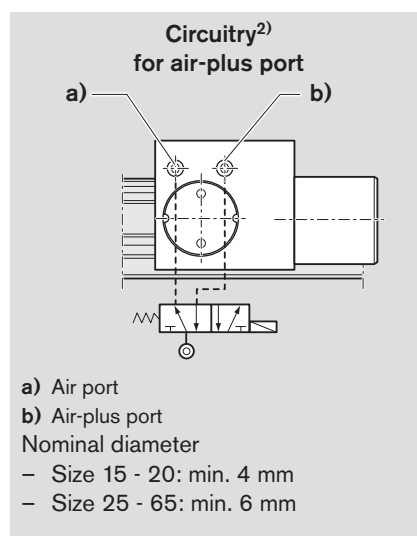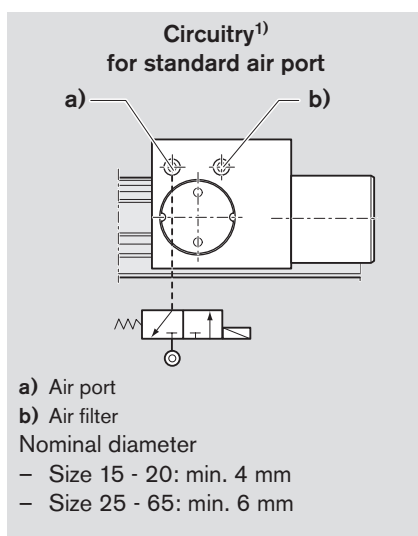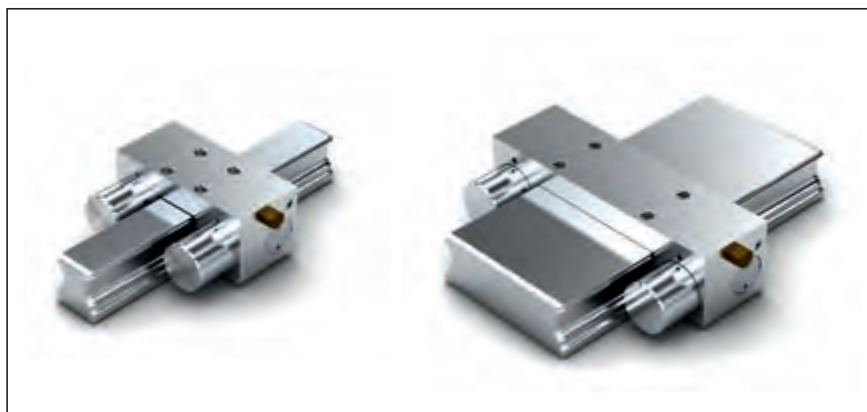


Size	Part number	Holding force		Air consumption (normalized)	
		Spring energy <sup>1)</sup>	with air-plus port <sup>2)</sup>	Air port	Air-plus port
		(N)	(N)	(dm <sup>3</sup> /stroke)	(dm <sup>3</sup> /stroke)
15	R1619 140 60	400	1 050	0.011	0.035
20	R1619 840 60	600	1 300	0.019	0.063
25	R1619 240 60	750	1 500	0.021	0.068
30	R1619 740 60	1 050	2 600	0.031	0.121
35	R1619 340 60	1 250	3 250	0.031	0.129
45	R1619 440 60	1 450	3 300	0.041	0.175
55	R1619 540 60	1 450	3 300	0.041	0.175
65	R1619 640 60	1 450	3 300	0.041	0.175
20/40	R1619 840 62	400	1 050	0.019	0.063
25/70	R1619 240 62	750	1 950	0.021	0.068
35/90	R1619 340 62	1 250	3 250	0.031	0.129

1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Increased holding force through additional pressurization with 6.0 bar compressed air at the air-plus port. Switching via 5/2 or 5/3-way directional control valve.

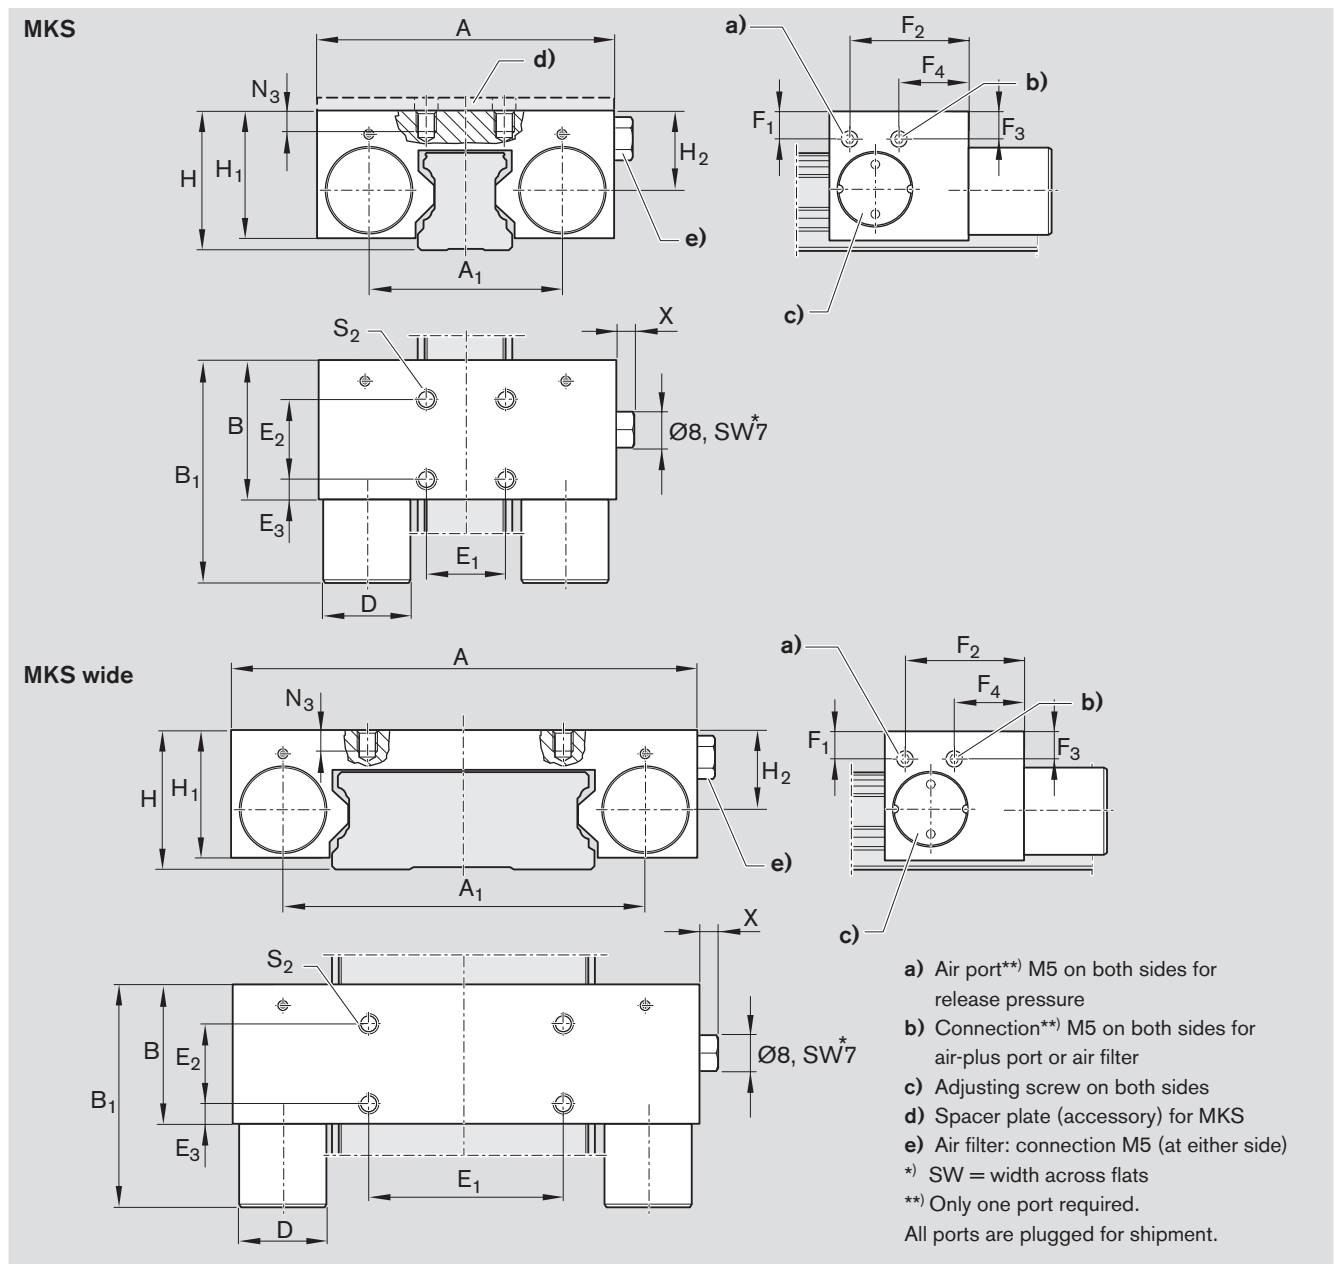

Size	Dimensions (mm)																		Weight (kg)
	A	A <sub>1</sub>	B	B <sub>1 max</sub>	D	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	H	H <sub>1</sub> <sup>1)</sup>	H <sub>2</sub>	N <sub>3</sub>	S <sub>2</sub>	X	
15	55	34.0	39	58.5	16	15	15	15.5	16.1	34.0	5.6	34.0	24	20.8	11.6	4.5	M4	6.5	0.29
20	66	43.0	39	61.5	20	20	20	9.0	6.0	34.5	4.5	17.3	30	27.0	15.5	6.0	M6	5.5	0.41
25	75	49.0	35	56.5	22	20	20	5.0	7.0	30.0	7.0	17.5	36	32.5	20.0	8.0	M6	5.5	0.50
30	90	58.0	39	68.5	25	22	22	8.5	10.3	24.5	8.5	15.0	42	38.5	24.0	9.0	M8	5.5	0.81
35	100	68.0	39	67.5	28	24	24	7.5	12.0	24.5	11.0	14.5	48	44.0	28.0	10.0	M8	5.5	1.00
45	120	78.8	49	82.5	30	26	26	11.5	14.5	29.5	14.5	19.5	60	52.0	35.5	15.0	M10	5.5	1.84
55	128	86.8	49	82.5	30	30	30	9.5	17.0	29.5	17.0	19.5	70	57.0	40.0	15.0	M10	5.5	2.08
65	138	96.8	49	82.5	30	30	30	9.5	14.5	29.5	14.5	19.5	90	73.5	55.0	20.0	M10	5.5	2.86
20/40	80	59.0	39	58.5	16	20	20	15.5	5.0	31.0	5.0	4.5	27	23.5	14.0	4.5	M4	5.5	0.39
25/70	120	94.0	35	56.5	22	50	20	5.0	9.0	30.0	7.0	17.5	35	32.5	20.0	8.0	M6	5.5	0.68
35/90	156	124.0	42	70.5	28	60	20	9.5	14.0	36.5	11.5	18.0	50	45.5	30.0	10.0	M10	5.5	0.89

1) For Ball Runner Block .H. (... , high, ...), a spacer plate is needed  217



Accessories, Clamping and Braking Units

## Pneumatic Clamping Units LCP

**R1619 .42 73**
**Note**



Can be used on all Ball Guide Rails SNS.


**Clamping by pressure application**

- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 60 °C

**Notes for mounting**

- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.

 **Follow the safety notes for Clamping and Braking Units.**  187


**Circuitry<sup>1)</sup>  
for standard air port**


a) Air port

b) Air filter


Nominal diameter

- Sizes 15 - 20: min. 4 mm
- Sizes 25 - 65: min. 6 mm

Size	Part number	Holding force Pneumatic <sup>1)</sup> (N)	Air consumption (normalized) Air port (dm <sup>3</sup> /stroke)
25	R1619 242 73	850	0.015

1) Holding force at 6 bar. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

LCP

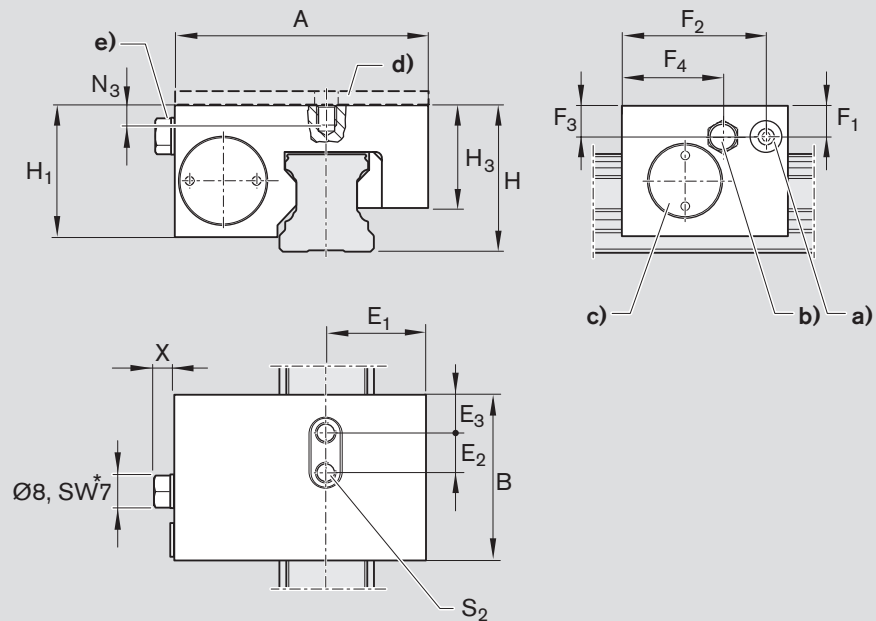

- a) Air port\*\*) M5 on both sides for release pressure
- b) Connection\*\*) M5 on both sides for air filter
- c) Adjusting screw on both sides
- d) Spacer plate (accessory)
- e) Air filter: connection M5 (at either side)

\*) SW = width across flats

\*\*) Only one port required.

All ports are plugged for shipment.

Size	Dimensions (mm)															Weight (kg)
	A	B	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	H	H <sub>1</sub> <sup>1)</sup>	H <sub>3</sub>	N <sub>3</sub>	S <sub>2</sub>	X	
25	61.4	41	23.9	9.5	9.75	6.5	36.0	6.5	24.5	36.0	32.5	24.55	7.7	M5	6.5	0.27

1) For Ball Runner Block .H. (... high, ...), a spacer plate is needed. Available on request.

Accessories, Clamping and Braking Units

# Pneumatic Clamping Units LCPS

## R1619 .40 70

### Note

Can be used on all Ball Guide Rails SNS.

### Clamps without pressurization (spring energy)



- Release pressure min. 5.5 bar
- Max. pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 - 60 °C



### Notes for mounting

- Make sure the adjoining structure is sufficiently rigid.
- Use only filtered and lubricated air. The specified filter mesh size is 25 µm.
- Read the mounting instructions before start-up.

**⚠ Follow the safety notes for Clamping and Braking Units.** 187

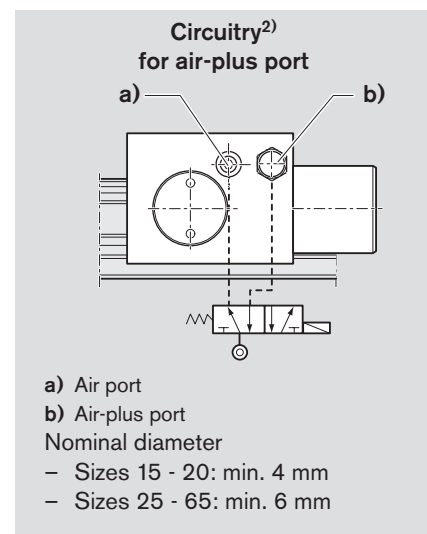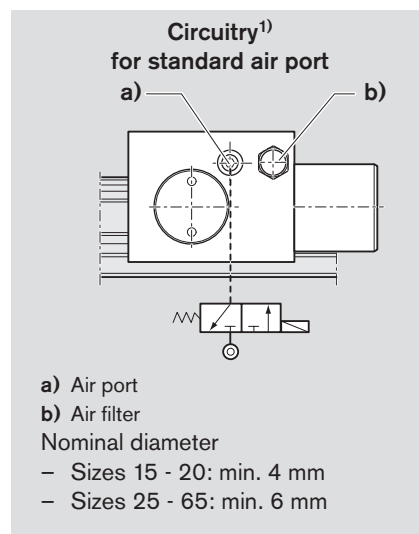


Size	Part number	Holding force Spring energy <sup>1)</sup> (N)	with air-plus port <sup>2)</sup> (N)	Air consumption (normalized)	
				Air port (dm <sup>3</sup> /stroke)	Air-plus port (dm <sup>3</sup> /stroke)
25	R1619 240 70	650	1 050	0.015	0.082

1) Holding force achieved by spring energy. Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Increased holding force through additional pressurization with 6.0 bar compressed air at the air-plus port. Switching via 5/2 or 5/3-way directional control valve.

## LCPS

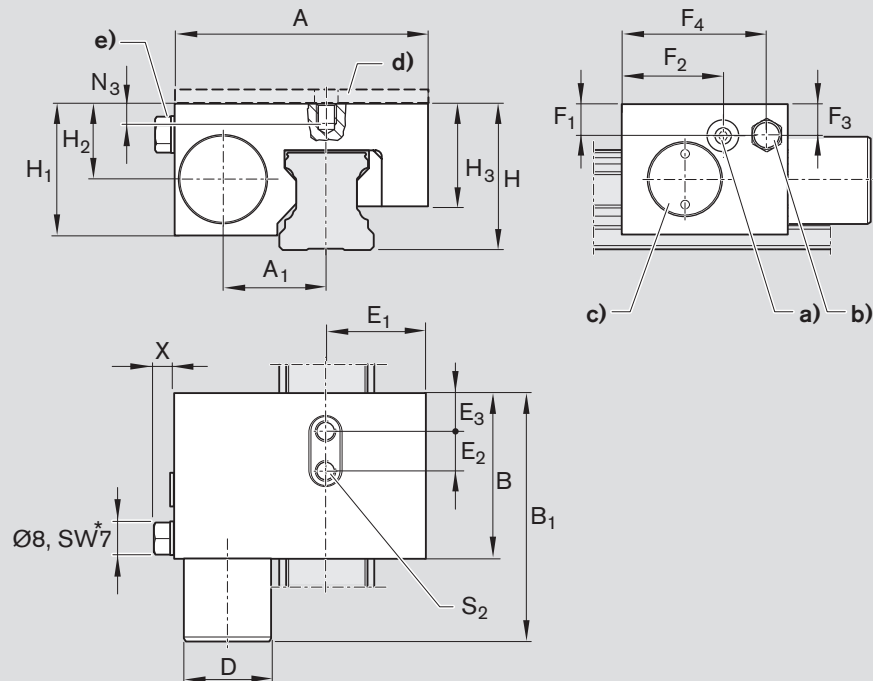

- a) Air port\*\*) M5 on both sides for release pressure
  - b) Connection\*\*) M5 on both sides for air-plus port or air filter
  - c) Adjusting screw on both sides
  - d) Spacer plate (accessory)
  - e) Air filter: connection M5 (at either side)
- \*) SW = width across flats  
 \*\*) Only one port required.  
 All ports are plugged for shipment.

Size	Dimensions (mm)																				Weight (kg)
	A	A <sub>1</sub>	B	B <sub>1max</sub>	D	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	F <sub>4</sub>	H	H <sub>1</sub> <sup>1)</sup>	H <sub>2</sub>	H <sub>3</sub>	N <sub>3</sub>	S <sub>2</sub>	X		
25	61.4	24.5	41	62.5	22	23.9	9.5	9.75	6.5	24.5	6.5	36.0	36	32.5	20.0	24.55	7.7	M5	6.5	0.35	

1) For Ball Runner Block .H. (... high, ...), a spacer plate is needed. Available on request.

Accessories, Clamping and Braking Units

## Product Description, Accessories, Manual Clamping Units, Spacer Plate

### Application areas

- Table crossbars and slides
- Width adjustment
- Mechanical stops
- Positioning on optical instruments and measuring tables

### Characteristic features

- Simple, reliable construction in compact design
- Manually operated clamping element without auxiliary power

### Further highlights

- Freely adjustable hand lever
- Symmetrical force application to ball guide rail via floating contact profile
- Precise positioning
- Holding forces up to 2,000 N

### Spacer Plate

For assembly with Ball Runner Blocks, high version, SNH R1621 or SLH R1624.

 Follow the safety notes for Clamping and Braking Units.  187

### Model overview, Accessories, Manual Clamping Units, Spacer Plate


HK  215




HK  216



Spacer Plate  217

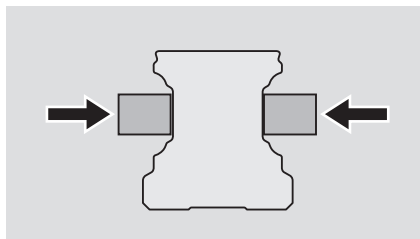

Pressure applied by hand lever

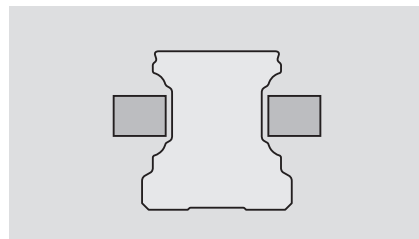

Hand lever disengaged

### Clamping by manual pressure

The clamping profiles are pressed against the web surfaces of the guide rail by the action of the hand lever.

# Manual Clamping Units HK

## R1619 .42 82

### Note

Can be used on all Ball Guide Rails SNS.

### Manual clamping

- Operating temperature range t: 0 - 70 °C


### Notes for mounting

- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.



**⚠ Follow the safety notes for Clamping and Braking Units.** 187

Size	Part number	Holding force <sup>1)</sup> (N)	Tightening torque (Nm)
15	R1619 142 82	1 200	4
20	R1619 842 82	1 200	5
25	R1619 242 82	1 200	7
30	R1619 742 82	2 000	15
35	R1619 342 82	2 000	15
45	R1619 442 82	2 000	15
55	R1619 542 82	2 000	22
65	R1619 642 82	2 000	22

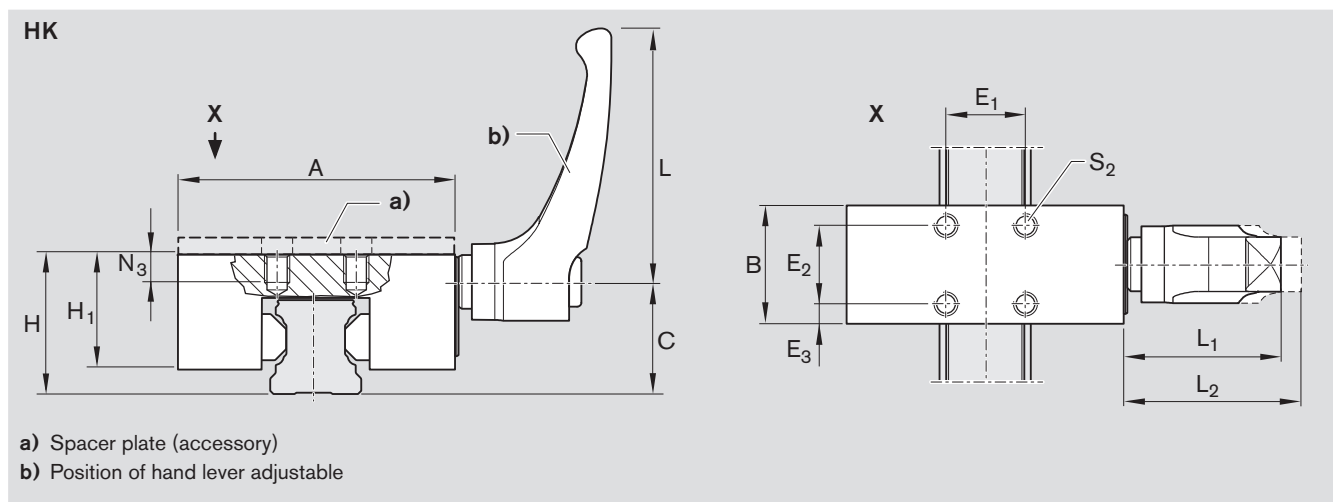

Size	Dimensions (mm)													Weight (kg)
	A	B	C	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	H	H <sub>1</sub> <sup>3)</sup>	L	L <sub>1</sub>	L <sub>2</sub> <sup>2)</sup>	N <sub>3</sub>	S <sub>2</sub>	
15	47	25	19.0	17	17	4.0	24	19	44	30.0	33.0	5	M4	0.16
20	60	24	24.5	15	15	4.5	30	23	44	30.0	33.0	6	M5	0.23
25	70	30	29.3	20	20	5.0	36	29	64	38.5	41.5	7	M6	0.43
30	90	39	34.0	22	22	8.5	42	33	78	46.5	50.5	8	M6	0.82
35	100	39	38.0	24	24	7.5	48	41	78	46.5	50.5	10	M8	1.08
45	120	44	47.0	26	26	9.0	60	48	78	46.5	50.5	14	M10	1.64
55	140	49	56.5	30	30	9.5	70	51	95	56.5	61.5	14	M14	1.71
65	160	64	69.5	35	35	14.5	90	66	95	56.5	61.5	20	M16	2.84

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Hand lever disengaged

3) For Ball Runner Block .H. (... high ...), a spacer plate is needed 217

Accessories, Clamping and Braking Units

## Manual Clamping Units HK

### R1619 .42 83

#### Note


Can be used on all Ball Guide Rails BNS.

#### Manual clamping

- Operating temperature range t: 0 - 70 °C

#### Notes for mounting


- Make sure the adjoining structure is sufficiently rigid.
- Read the mounting instructions before start-up.

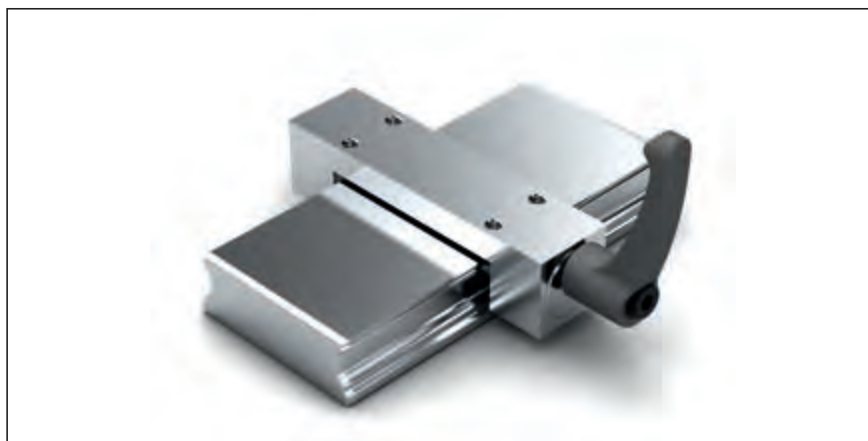

**⚠ Follow the safety notes for Clamping and Braking Units.** 187

Size	Part number	Holding force <sup>1)</sup> (N)	Tightening torque (Nm)
25/70	R1619 242 83	1 200	7
35/90	R1619 342 83	2 000	15

HK wide

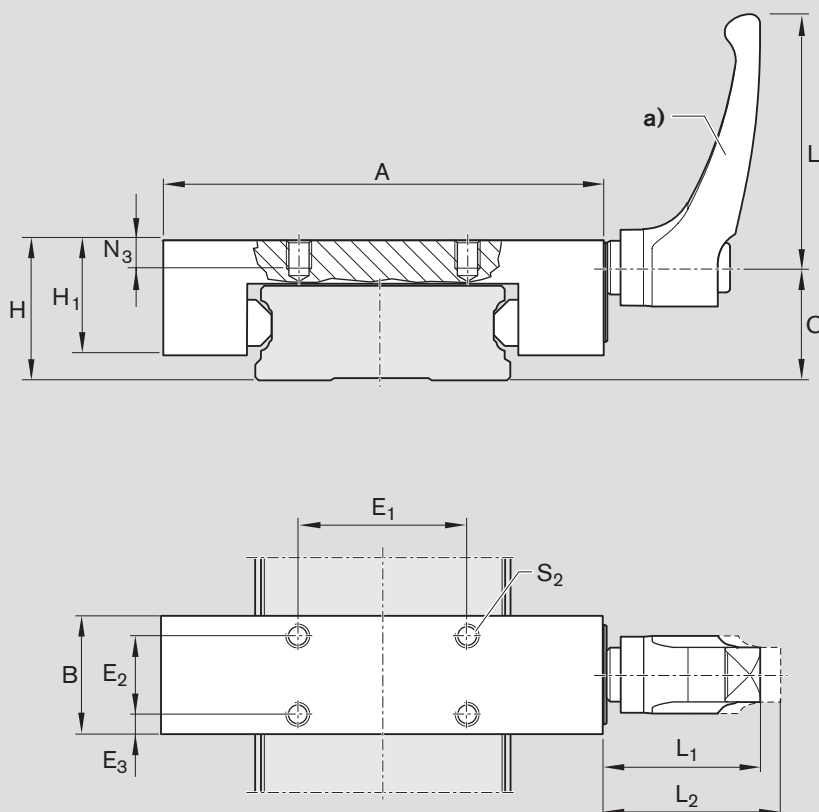

a) Position of hand lever adjustable

Size	Dimensions (mm)													Weight (kg)
	A	B	C	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	H	H <sub>1</sub>	L	L <sub>1</sub>	L <sub>2</sub> <sup>2)</sup>	N <sub>3</sub>	S <sub>2</sub>	
25/70	120	39	28.2	50	25	7.0	35	30	64	38.5	41.5	11	M6	0.77
35/90	145	39	38.0	60	20	9.5	50	39	78	46.5	50.5	11	M8	1.38

1) Testing is performed in the installed condition with a film of lubricating oil (ISO VG 68).

2) Hand lever disengaged

# Spacer Plate


## For Clamping Units MK, MKS and HK

### Note

For assembly with Ball Runner Blocks, high version, SNH R1621 or SLH R1624.



Spacer Plate

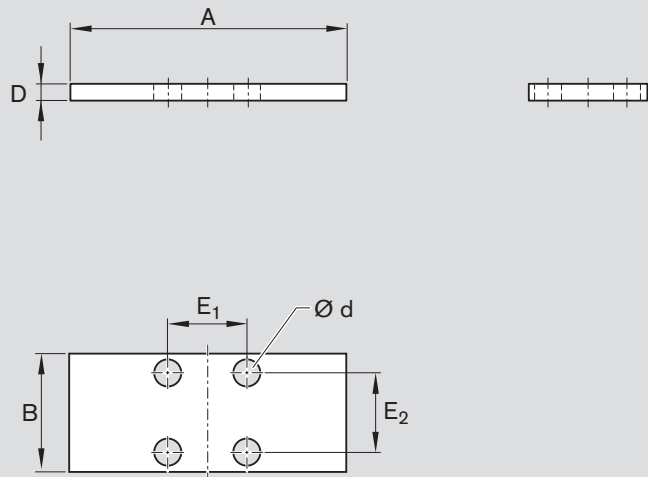

### R1619 .40 65

#### Suitable for Clamping Units:

- R1619 .42 60 (MK)
- R1619 .40 60 (MKS)

Size	Part number	Dimensions (mm)						Weight (kg)
		A	B	D	d	E <sub>1</sub>	E <sub>2</sub>	
15	R1619 140 65	55	39	4	4.5	15	15	0.065
25	R1619 240 65	75	35	4	6.5	20	20	0.078
30	R1619 740 65	90	39	3	8.5	22	22	0.077
35	R1619 340 65	100	39	7	8.5	24	24	0.202
45	R1619 440 65	120	49	10	10.5	26	26	0.434
55	R1619 540 65	128	49	10	10.5	30	30	0.465

### R1619 .42 .5

#### Suitable for Clamping Units:

- R1619 .42 82 (HK)

Size	Part number	Dimensions (mm)						Weight (kg)
		A	B	D	d	E <sub>1</sub>	E <sub>2</sub>	
15	R1619 142 85	47	25	4	4.5	17	17	0.035
25	R1619 242 85	70	30	4	6.5	20	20	0.062
30	R1619 742 85	90	39	3	6.5	22	22	0.080
35	R1619 340 65	100	39	7	8.5	24	24	0.202
45	R1619 442 85	120	44	10	10.5	26	26	0.387
55	R1619 542 85	140	49	10	14.5	30	30	0.511